ACM Series

21.5", 23.8" DICOM Clinical Monitor with Touchscreen





Features

- 21.5"/23.8" 16:9 LCD FHD panel with LED backlight with high contrast ratio 1000:1
- In-house scaler board supporting DICOM part 14 gamma calibrations
- 10-point PCAP touchscreen
- Anti-fingerprint surface treatment for ease of cleaning and enhanced readability
- 4 illuminated function touch keys on the front glass
- Screwless design allows for easy and faster cleaning and disinfection procedures
- Wide viewing angles support for both portrait and landscape modes

ACM-21T			
Display		**Mechanical**	
Size	21.5"	Dimensions (WxHxD)	Refer to the back of this page
Resolution	1920 x 1080	Weight	6.55 kg
Aspect Ratio	16:9	Housing	Aluminum, powder-coated, anti-bacterial
Color	16.7M	Mounting	VESA 100
Brightness (Nits)	300 nits	**Environmental**	
Viewing Angle (U/D/R/L)	89/89/89/89	Operating	0°C to +40°C / 5% to 95% rel. humidity (non-condensing)
Contrast Ratio	1000:1	Storage	-10°C to +60°C, 5% to 95% rel. humidity (non-condensing)
Touchscreen	10-point, PCAP, Anti-fingerprint coating	Ingress Rating	IP54 protection with rear cable cover attached
Bonding	Air bonding	Standard	IEC 62368-1:2014; EN 62368-1:2014 +A11:2017 Compliant with IEC 60601-1 Ed. 3.1 & IEC 60601-1-2:2014+AMD1:2020, EN 60601-1-2: 2015 +A1:2021
I/O			
USB Port	USB type B (for touch)		
Video	DPx1, VGAx1, HDMIx1		
Speaker	2w speaker x2		
Power Input	External medical-grade 12V, 2.5A adapter		


LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

ACM-23T			
Display		**Mechanical**	
Size	23.8"	Dimensions (WxHxD)	Refer to the back of this page
Resolution	1920 x 1080	Weight	7.85 kg
Aspect Ratio	16:9	Housing	Aluminum, powder-coated, anti-bacterial
Color	16.7M	Mounting	VESA 100
Brightness (Nits)	300 nits	**Environmental**	
Viewing Angle (U/D/R/L)	89/89/89/89	Operating	0°C to +40°C / 5% to 95% rel. humidity (non-condensing)
Contrast Ratio	1000:1	Storage	-10°C to +60°C, 5% to 95% rel. humidity (non-condensing)
Touchscreen	10-point, PCAP, Anti-fingerprint coating	Ingress Rating	IP54 protection with rear cable cover attached
Bonding	Air bonding	Standard	IEC 62368-1:2014; EN 62368-1:2014 +A11:2017 Compliant with IEC 60601-1 Ed. 3.1 & IEC 60601-1-2:2014+AMD1:2020, EN 60601-1-2: 2015 +A1:2021
I/O			
USB Port	USB type B (for touch)		
Video	DPx1, VGAx1, HDMIx1		
Speaker	2w speaker x2		
Power Input	External medical-grade 12V, 2.5A adapter		

Dimensions

ACM Series

Units: mm

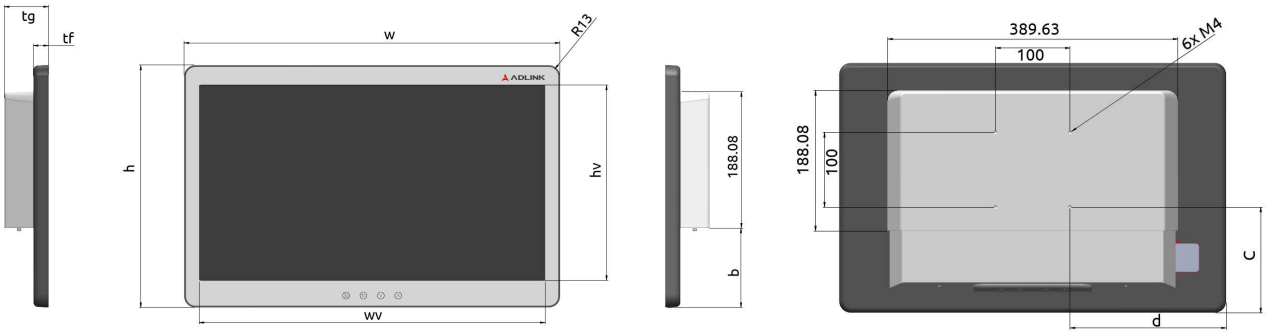

Model/Configuration	width (w)	height (h)	visible width (wv)	visible height (hv)	tg	tf
ACM-21T/21.5"	519.13	334.66	477.86	269.39	60.8	20.8
ACM-23T/23.8"	569.91	363.33	528.64	298.06		

Model/Configuration	b	c (VESA interface to front bottom edge)	d (VESA interface to front bottom edge)
ACM-21T/21.5"	109.73	141.73	216.35
ACM-23T/23.8"	124.06	165.06	234.95

Ordering Information

ACM-21T	21.5" DICOM Clinical Monitor with Touchscreen
ACM-23T	23.8" DICOM Clinical Monitor with Touchscreen

All products and company names listed are trademarks or trade names of their respective companies. Updated Aug. 20, 2026 ©2026 ADLINK Technology, Inc.
All Rights Reserved. All pricing and specifications are subject to change without further notice.

www.adlinktech.com

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000