
COM-HPC-ALT

User's Guide

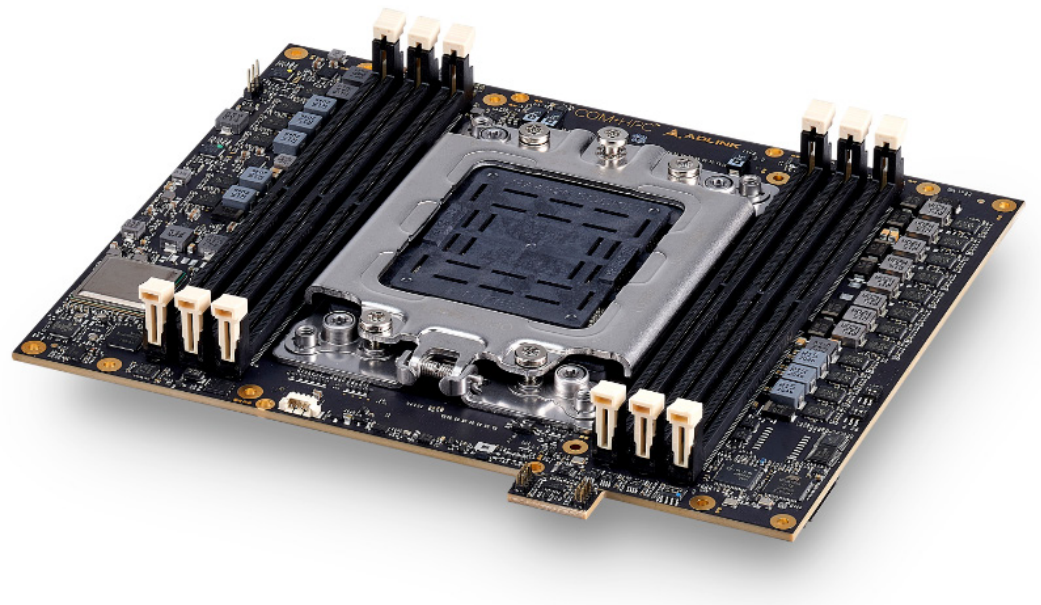

COM-HPC™

Revision:	Rev. 1.1
Date:	2025-07-30
Part Number:	50M-00115-1010

ADLINK
LEADING EDGE COMPUTING

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Revision History

Revision	Description	Date	Author
1.0	Initial release	2023-01-10	CC
1.1	Pinout and signal descriptions and BIOS checkpoints, beep codes updated	2025-07-30	AL

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Preface

Disclaimer

Information in this document is provided in connection with ADLINK products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in ADLINK´s Terms and Conditions of Sale for such products, ADLINK assumes no liability whatsoever, and ADLINK disclaims any express or implied warranty, relating to sale and/or use of ADLINK products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right. If you intend to use ADLINK products in or as medical devices, you are solely responsible for all required regulatory compliance, including, without limitation, Title 21 of the CFR (US), Directive 2007/47/EC (EU), and ISO 13485 & 14971, if any. ADLINK may make changes to specifications and product descriptions at any time, without notice.

Environmental Responsibility

ADLINK is committed to fulfil its social responsibility to global environmental preservation through compliance with the European Union's Restriction of Hazardous Substances (RoHS) directive and Waste Electrical and Electronic Equipment (WEEE) directive. Environmental protection is a top priority for ADLINK. We have enforced measures to ensure that our products, manufacturing processes, components, and raw materials have as little impact on the environment as possible. When products are at their end of life, our customers are encouraged to dispose of them in accordance with the product disposal and/or recovery programs prescribed by their nation or company.





California Proposition 65 Warning: This product can expose you to chemicals including acrylamide, arsenic, benzene, cadmium, Tris(1,3-dichloro-2-propyl)phosphate (TDCPP), 1,4-Dioxane, formaldehyde, lead, DEHP, styrene, DINP, BBP, PVC, and vinyl materials, which are known to the State of California to cause cancer, and acrylamide, benzene, cadmium, lead, mercury, phthalates, toluene, DEHP, DIDP, DnHP, DBP, BBP, PVC, and vinyl materials, which are known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Trademarks

Product names mentioned herein are used for identification purposes only and may be trademarks / registered trademarks of respective companies.

Copyright © 2025 ADLINK Technology Incorporated

This document contains proprietary information protected by copyright. All rights are reserved. No part of this manual may be reproduced by any mechanical, electronic, or other means in any form without prior written permission of the manufacturer.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Safety Instructions

For user safety, please read and follow all Instructions, **WARNING**s, **CAUTION**s, and **NOTE**s marked in this manual and on the associated equipment before handling/operating the equipment.

Read these safety instructions carefully.

- Keep this manual for future reference.
- Read the specifications section of this manual for detailed information on the operating environment of this equipment.
- Turn off power and unplug any power cords/cables when installing/mounting or un-installing/removing equipment.
- To avoid electrical shock and/or damage to equipment:
- Keep equipment away from water or liquid sources;
- Keep equipment away from high heat or high humidity;
- Keep equipment properly ventilated (do not block or cover ventilation openings);
- Make sure to use recommended voltage and power source settings;
- Always install and operate equipment near an easily accessible electrical socket outlet;
- Secure the power cord (do not place any object on/over the power cord);
- Only install/attach and operate equipment on stable surfaces and/or recommended mountings;
- If the equipment will not be used for long periods of time, turn off the power source and unplug the equipment.

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Conventions

The following conventions may be used throughout this manual, denoting special levels of information

Note: This information adds clarity or specifics to text and illustrations.

Caution: This information indicates the possibility of minor physical injury, component damage, data loss, and/or program corruption.

Warning: This information warns of possible serious physical injury, component damage, data loss, and/or program corruption.

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Getting Service

Ask an Expert: https://www.adlinktech.com/en/askanexpert

ADLINK Technology, Inc.
No. 66, Huaya 1st Rd., Guishan District, Taoyuan City 333411, Taiwan
Tel: +886-3-216-5088
Fax: +886-3-328-5706
Email: service@adlinktech.com

Ampro ADLINK Technology, Inc.
6450 Via Del Oro, San Jose, CA 95119-1208, USA
Tel: +1-408-360-0200
Toll Free: +1-800-966-5200 (USA only)
Fax: +1-408-600-1189
Email: info@adlinktech.com

ADLINK Technology (China) Co., Ltd.
300 Fang Chun Rd., Zhangjiang Hi-Tech Park, Pudong New Area, Shanghai, 201203, China
Tel: +86-21-5132-8988
Fax: +86-21-5132-3588
Email: market@adlinktech.com

ADLINK Technology GmbH
Hans-Thoma-Strasse 8-10, 68163 Mannheim, Germany
Tel: +49-621-43214-0
Fax: +49-621 43214-30
Email: emea@adlinktech.com

Please visit the Contact page at www.adlinktech.com for information on how to contact the ADLINK regional office nearest you.

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Table of Contents

Revision History 2

Preface 3

1. Introduction 3

2. Specifications 4
   - 2.1 Core System 4
   - 2.2 Expansion Busses 5
   - 2.3 Ethernet 8
   - 2.4 Multi I/O and Storage 9
   - 2.5 Others 10
   - 2.6 Security 11
   - 2.7 Module Management Controller (MMC) 11
   - 2.8 Debug 17
   - 2.9 Power 17
   - 2.10 Mechanical and Environmental 18

3. Block Diagram 20

4. Pinout and Signal Descriptions 21
   - 4.1 Pin Summary 21
   - 4.2 Signal Terminology Descriptions 6
   - 4.3 Signal Descriptions on J1/J2 Connectors 7
     - 4.3.1 Ethernet KR/KX 7
     - 4.3.2 NBASE-T Ethernet 9
     - 4.3.3 PCI Express 11
     - 4.3.4 USB 19
     - 4.3.5 Asynchronous Serial Port 21
     - 4.3.6 I2C 22
     - 4.3.7 Port 80 Support on USB_PD I2C Bus 23
     - 4.3.8 IPMB 23
     - 4.3.9 General Purpose SPI 24
     - 4.3.10 Power & System Management 24
     - 4.3.11 Thermal Protection 26
     - 4.3.12 SMBus 26

Copyright © 2025 ADLINK Technology, Inc.
ADLINK Leading EDGE COMPUTING

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

4.3.13 General Purpose Input Outputs 26
4.3.14 Module Type Definition 27
4.3.15 Miscellaneous Signals 28
4.3.16 Power and Ground 30

5. Additional Features 31
5.1 Debug Connector (40-pin connector) 32
5.2 Status LEDs 33
5.3 Fan Connector 34
5.4 BIOS Default Reset (update later) 35
5.5 BIOS Boot Select (update later) 36

6. BIOS Checkpoints, Beep Codes 37
6.1 Status Code Ranges 38

7. Mechanical and Thermal 39
7.1 Module Dimensions 39
7.2 Thermal Solutions 40
7.2.1 Heatsink : THS-ALT-BL 40
7.2.2 Low Profile Active Cooler: THSF-ALT-BL-S 41
7.2.3 High Profile Passive Heatsink: THSH-ALT-VC 42
7.2.4 Active Cooling: THSF-ALT-BL 43

Copyright © 2025 ADLINK Technology, Inc.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

List of Figures

Figure 1 – Functional block diagram 20
Figure 2 – Rear side row 21
Figure 4 – Heatsink THS-ALT-BL 40
Figure 5 – THSF-ALT-BL-S 41
Figure 6 – High profile passive heatsink THSH-ALT-VC 42
Figure 7 – Cooler THSF-ALT-BL 43

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1. Introduction

Caution: This is an EA (early available) engineering manual. The contents may not accurately reflect the actual or final version of this product.

ADLINK COM-HPC-ALT is a COM-HPC® Server Type Size E compliance module featuring Ampere® Altra® Series SoC. It supports up to 128 cores and boosts up to 2.6GHz based on 190W TDP while providing up to 384GB of RDIMM, UDIMM, LRDIMM DDR4 six-channel memory at up to 3200 MT/s in 6 DIMM sockets. These combined features make the COM-HPC-ALT well suited to customers who need uncompromising system performance and responsiveness embedded solutions with extended product life.

The COM-HPC-ALT features 4x 110G SFP+ interfaces by Broadcom BCM57502 (PCIex8 input, 4x 10G-KR output) and a single on-board Gigabit Ethernet port by Intel i210/i211 series. It features 64x PCIe Gen4 physical lanes, 4x USB 3.x upgrade signals, and 4x USB 2.0 ports

The COM-HPC-ALT features 1x GPP_SPI and 1x Boot_SPI, 1x SMBus, 2x I2C, 2x UART and 12x GPIO. No eSPI offered

The COM-HPC-ALT based discrete circuit and MMC (ATMEGA128), instead of CLPD, are supported by the module for power sequence control

The COM-HPC-ALT supports IPMB, which supports an MMC (module management controller, ATMEGA) and its firmware on the module. Combined with a dedicate 1x PCIe lane (it is called PCIe_BMC), IPMB can enable Carrier BMC (for example, AST2500 or equivalent) and access necessary message (for example, voltage information and CPU temperature on module) between MMC and Carrier BMC. In addition, an EEPROM is located on I2C_0 bus as a traditional COMe EEPROM usage and also as a FRU for Carrier BMC

One security chip is supported on the module. The traditional TPM 2.0, SPI based (same as Ampere Altra reference design) (it is on GP_SPI bus)

The module is equipped with EDK2 (bootloader, open source) BIOS with CMOS backup, supporting embedded features such as remote console, hardware monitor, and watchdog timer.

No EC on this product.

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2. Specifications

2.1 Core System

SoC

Ampere Computing, Ampere® Altra® Series Processors

- M128-26 128 cores, 2.6GHz, 190W TDP
- Q80-26 80 cores, 2.6GHz, 150W TDP
- Q64-22 64 cores, 2.2GHz, 95W TDP
- Q32-17 32 cores, 1,7GHz, 65W TDP

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Memory

Up to 384GB 3200 MT/s DDR4 in 6 DIMM sockets, Maximum 64GB per socket

Supports RDIMM, UDIMM and LRDIMM and 3DS

3 DIMM on the right side, the other 3 DIMMs on the left side

Cache

1 MB L2 cache per core

32 MB system level cache

Embedded BIOS

EDK2 UEFI with CMOS backup in 32 (or 16, TBC) MB SPI BIOS

2.2 Expansion Busses

PCI Express

64x PCIe lanes with 5x PCIe_REFCLK / 5x PCIe_CLKREQ

- Up to Gen4 speed
- PCIe 0-7 1 x4 or 2 x2 config at 0-3, 1 x4 or 2 x2 config at 4-7, 1 x8 config at 0-7 (from Root Complex B)
- PCIe 8-15 1 x4 or 2 x2 config at 8-11, 1 x4 or 2 x2 config at 12-15, 1 x8 config at 8-15 (from Root Complex B)
- PCIe 16-31 1 x16 or 2 x8 or 4 x4 config at 16-31, (from Root Complex A)
- PCIe 32-47 1 x16 or 2 x8 or 4 x4 config at 32-47, (from Root Complex A)
- PCIe 48-63 1 x16 or 2 x8 or 4 x4 config at 48-63, (from Root Complex A)
- Lane polarity inversion

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

- 5x PCIe_REFCLK/PCIe_CLKREQ

  PCIe_REFCLK0_LO & PCIe_CLKREQ0_LO# : for PCIe lanes [0:7] and PCIe_BMC

  PCIe_REFCLK0_HI & PCIe_CLKREQ0_HI# : for PCIe lanes [8:15]

  PCIe_REFCLK1 & PCIe_CLKREQ1# : for PCIe lanes [16:31]

  PCIe_REFCLK2 & PCIe_CLKREQ2# : for PCIe lanes [32:47]

  PCIe_REFCLK3 & PCIe_CLKREQ3# : for PCIe lanes [48:63]

Note: Due to SoC orientation, the trace of PCIe 48-63 lanes over the PICMG specification marginally and may require re-driver on carrier.

PCI Express Dedicated for Carrier BMC

1x PCIe lane (called PCIe_BMC)

They can be used to connect the Carrier BMC (located on carrier) and combined with MMC (Module Management Controller, build option feature), such as voltage monitoring, power on/off, in the server applications.

Boot SPI

1x Boot_SPI, 2x Boot_SPI_CS dedicated for boot BIOS flash usage

SPI clock is either 20 MHz, 25 MHz, 33 MHz (Ampere Altra SOC only support up to 30MHz)

Support 3.3V of VCC_BOOT_SPI pin, if SPI flash on carrier is implemented, it shall be powered by VCC_BOOT_SPI pin

BIOS Boot Selection

BIOS flash can be boot up at SPI bus, can be located at module or carrier or combined

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

I2C

2x I2C, I2C 0 and I2C 1

I2C 0 additional offer ALERT# input and 3.3V power rail (source from Ampere Altra SoC)

I2C 1 is 1.8V power rail (source from Ampere Altra SoC)

Supports software programmable clock of 100 KHz (standard mode) and 400 KHz operation (fast mode)

Supports multi-master, allowing carrier to read the module's EEPROM before powering up the module

Support 7-bit and 10-bit address mode

An EEPROM is located on I2C 0, which can be used as Module EEPROM and IPMI FRU, combined together

USB_PD_I2C

COM-HPC Module should support exporting Port 80 information over the USB_PD I2C bus (signals USB_OD_I2C_DAT and USB_PD_I2C_CLK) to Carrier hardware that implements a pair of 7-segment displays to show the codes

The USB_PD_I2C comes from MMC ATMEGA128 and USB_PD_I2C, MMC and SOC connect to the same bus

IPMB

1x IPMB comes from MMC. Please refer to section **2.9 Module Management Controller** for further details

IPMB is used with a Carrier BMC.

MMC is ATMEGA solution that communicate with Ampere Altra SOC through UART

Several monitored voltage (for example, memory voltage, CPU voltage) and temperature (for example, CPU temperature) can be communicated between MMC and Carrier BMC through IPMB.

A dedicated PCIe x1 lane is also available on the Carrier BMC, allowing the Carrier BMC to generate a VGA or other format video output, for management functions.

Copyright © 2025 ADLINK Technology, Inc.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

General Purpose SPI

1x GP_SPI, 2x GP_SPI_CS

A TPM is located on GP_SPI bus

SM Bus

1x SMBus comes from SoC I2C_9 bus

2.3 Ethernet

NBASE-T Ethernet

Intel® Ethernet Controller i210/i211, connected to the SoC through PCIe lane

Supports 10/100/1000 Mbps data transfer rates, both full-duplex and half-duplex

Supports NBASET_SDP, Software-Defined Pin. Can also be used for IEEE 1588 support such as 1pps signal

Supports Wake on LAN at S3/S4/S5

Supports PXE boot

Ethernet KR/KX Interfaces

Broadcom® Ethernet Controller BCM57502, connected to the SoC through PCIex8 lane

4x 10GBASE-KR and its sideband signals

Supports both full-duplex and half-duplex

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2.4 Multi I/O and Storage

USB

Up to 4x USB 3.2 Gen1/2.0 (USB 0,1,2,3; via PCIe to USB IC) (the IC is Renesas uPD720201)
SuperSpeedPlus, SuperSpeed, High-Speed, Full-Speed and Low-Speed USB signalling

Asynchronous Serial Port

Two UART interfaces UART0 and UART1. UART0 supports TX RX RTS CTS. UART1 supports TX/RX
Console Redirection UART0 or UART1 selectable in BIOS

Up to 2 serial ports are supported in standard BIOS including Super I/O on the carrier

COM Port	Description	IRQ	Address	Console Redirection Support
COM 1	Supported by module (SER0, A98/A99), via SOC	4	0x3F8	Yes
COM 2	Supported by module (SER1, A101/A102), via SOC	3	0x2F8	Yes

Note: UART0, 1 both source from SOC. UART0 offers TX, RX, RTS#, CTS#. UART1 only offers TX and RX; its RTS#, CTS# are simulated by 2 GPIO from SOC.

GPIO

12x GPIO

Supports GPI with interrupt

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2.5 Others

FAN Control

Control source is from MMC

FAN control is offered

Health Monitoring

CPU temperature (through I2C3 of SOC) and board temperature are monitored by MMC.

8-10 voltage are monitored by EC, customer can get voltage information on BIOS menu and also shown in SEMA GUI and access it through SEMA API

1. CPU core
2. GFX core
3. Memory power
4. 5VSB (ROW AB/CD)
5. Main power (ROW AB/CD, 8.5V~20V or 5V~xxV)
6. 5VDUAL (CPU board)
7. 3.3VS (CPU board)
8. 3.3VSTBY (CPU board)
9. RTC battery (ROW AB/CD)
10. MAINPWRSENSE(For BMC calculate power consumption of the main power)

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2.6 Security

This module offers one security-related chip on the module.

Trusted Platform Module (TPM)

Chipset: Infineon solution

Type: TPM 2.0 (SPI bus based) (located on GP_SPI)

2.7 Module Management Controller (MMC)

A Module Management Controller (MMC) is supported by default, which offers power sequence management and IPMB that can be connected to Carrier BMC for voltage, current, temperature, and other system information through IPMI protocol

The selected MMC is ATMEGA128A-MU (Microchip) (-40 to 85°C) solution.

MMC connects to SOC through UART interface

MMC connects to a HW monitor through I2C bus to monitor module's voltage, current and temperature

MMC only offers two I2C, one is used for USB_PD_I2C, the other used for IPMB.

Overview

COM-HPC Module and Carrier boards **may** support out-of-band (OOB) management features. These features **may** be implemented on COM-HPC Server or Client systems. Traditionally OOB management is more of a server class feature, but the option is there for both COM-HPC Clients and Servers. There is a separate PICMG document that describes COM-HPC OOB management features in details — **PICMG COM-HPC Platform Management Interface Specification**. The management architecture is divided into BMC (Board Management Controller) and MMC (Module Management Controller), which are explained in the following sections.

BMC (Board Management Controller) (Located on Carrier board if deployed)

Copyright © 2025 ADLINK Technology, Inc.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

This is a microcontroller subsystem, usually based on the Carrier, that performs system out-of-band management functions such as firmware updates, power and reset control, performance monitoring and more. For COM-HPC module, which are hosted on the carrier, it **may** be a full subsystem with CPU / SOC, DRAM memory, an internal display controller and more. It **may** be ARM based. It **may** run a Linux or other OS. A popular vendor for this sort of BMC part is Aspeed, and in particular the Aspeed AST2510 and successor parts. Many other vendors and parts are possible.

It is anticipated that in most situations the BMC, if deployed, will be on the Carrier. Implementation of OOB management and a BMC on the Carrier is entirely optional. A Carrier based BMC is intended to work in conjunction with a Module based microcontroller referred to as the MMC (described below).

A Carrier BMC, if deployed, **shall** implement an IPMB interface to the COM-HPC Module. This is the channel for IPMI support. The Carrier BMC **may** also make use of the COM-HPC I2C0, USB, eSPI, NBASET0, UARTx and / or the PCIe_BMC interfaces, as well as controlling the module power signals like PWRBTN, ...).

Any COM-HPC USB host port may be used to interface to a Carrier BMC USB client port. The Module USB port is usually a Module chipset or SOC host port, and not a MMC USB port. Designers **should** avoid using COM-HPC USB0, as it has special privileges allowing it to be used as a host or client. Designers **may want to** avoid using COM-HPC USB0, 1, 2, 3 as they are defined to allow USB SuperSpeed capability and BMC devices to not typically have USB SuperSpeed capability. USB4, 5, 6 or 7 **should** be used for the BMC interface if available.

Of the two COM-HPC UART interfaces that **may** be used to interface to a Carrier BMC, UART1 **should** be selected as UART0 is often used for functions such as Console Redirect.

MMC (Module Management Controller) (Located on COM-HPC Module, optional)
The MMC is a Module based microcontroller that **may** work in conjunction with a Carrier based BMC. If there is no Carrier BMC, then the MMC **shall** fall back to a mode that does not depend on the Carrier BMC, allowing the Module to function without external OOB management. The MMC **shall** powered by the VCC_5V_SBY supply to allow for OOB functionality even when the main supply is not available, however, it **should** also use the main VCC rail, if available.

In most implementations, the MMC will be a relatively small low cost and low power device, in order to keep Module costs down for customers that do not require OOB management features. It **may** serve as a sensor aggregator. It **may** serve as host for nonvolatile Module parameter storage.

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

The MMC, if implemented, **shall** include an IPMB slave interface. It **may** additionally interface to the Carrier BMC over any of several other COM-HPC interfaces, including the I2C0 and or UART0 ports.

Carrier and Module BMC and MMC Combinations

The **PICMG COM-HPC Platform Management Interface Specification** defines a number of different carrier and module options, which differ based on their management capabilities. Table 45 below lays out the options and defines a shorthand notation for the options. Full details are in the **PICMG COM-HPC Platform Management Interface Specification**.


Table 45: Carrier and Module BMC and MMC Combinations and Shorthand Notation

	Shorthand Notation	Description
Carrier	C.U	• **U**nmanaged • The carrier has no BMC. Power and chassis management is typically done via a small microcontroller • Management depends on the Module's capabilities
	C.M	• **M**anaged via Carrier based BMC • An IPMB communication channel to the MMC ***shall*** be implemented • The BMC ***may*** also make use of the NBASET0, eSPI, USB, I2C0, UART0, PCIe_BMC , and / or the GPIO interfaces • Provides Redfish to the outside (or IPMI for legacy) • iKVM for the module via PCIe_BMC/USB
Module	M.U	• **U**nmanaged (No MMC) • ***Should*** implement a dedicated EEPROM (EeeP) for module identification • CPU management possible via I2C0, NBASET0, eSPI, USB, UART0, GPIO, PCIe_BMC (all except IPMB), depending on the Carrier capabilities
	M.B	• **B**asic Management capabilities via low cost MMC • An IPMB interface to Carrier BMC ***shall*** be implemented • Management via external interfaces (IPMB, I2C0, NBASET0, eSPI, USB, UART0, GPIO, PCIe_BMC)
	M.F	• **F**ull Management capabilities (typically via ARM-based OS) • NBASET0 is shared by MMC and CPU (switched on Module), providing a high-speed OOB communication channel • An IPMB interface to Carrier BMC ***shall*** be implemented • Additional interfaces ***may*** be used (I2C0, NBASET0, eSPI, USB, UART0, GPIO, PCIe_BMC)

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Assuming that the Types of the Carrier and Module match up (Server with Server, Client with Client) and the board sizes / connector positions match up (size A, B, C or size D,E) then a C.U or C.M Carrier shall be basically operable with a M.U or M.B or M.F Module. The OOB management features may be missing, depending on what is matched with what. Additionally, there will likely be some vendor specific aspects to OOB management options.

M.B Module and C.M Carrier will be implemented at ADLINK COM-HPC Server Module and COM-HPC Server Carrier as first wave.

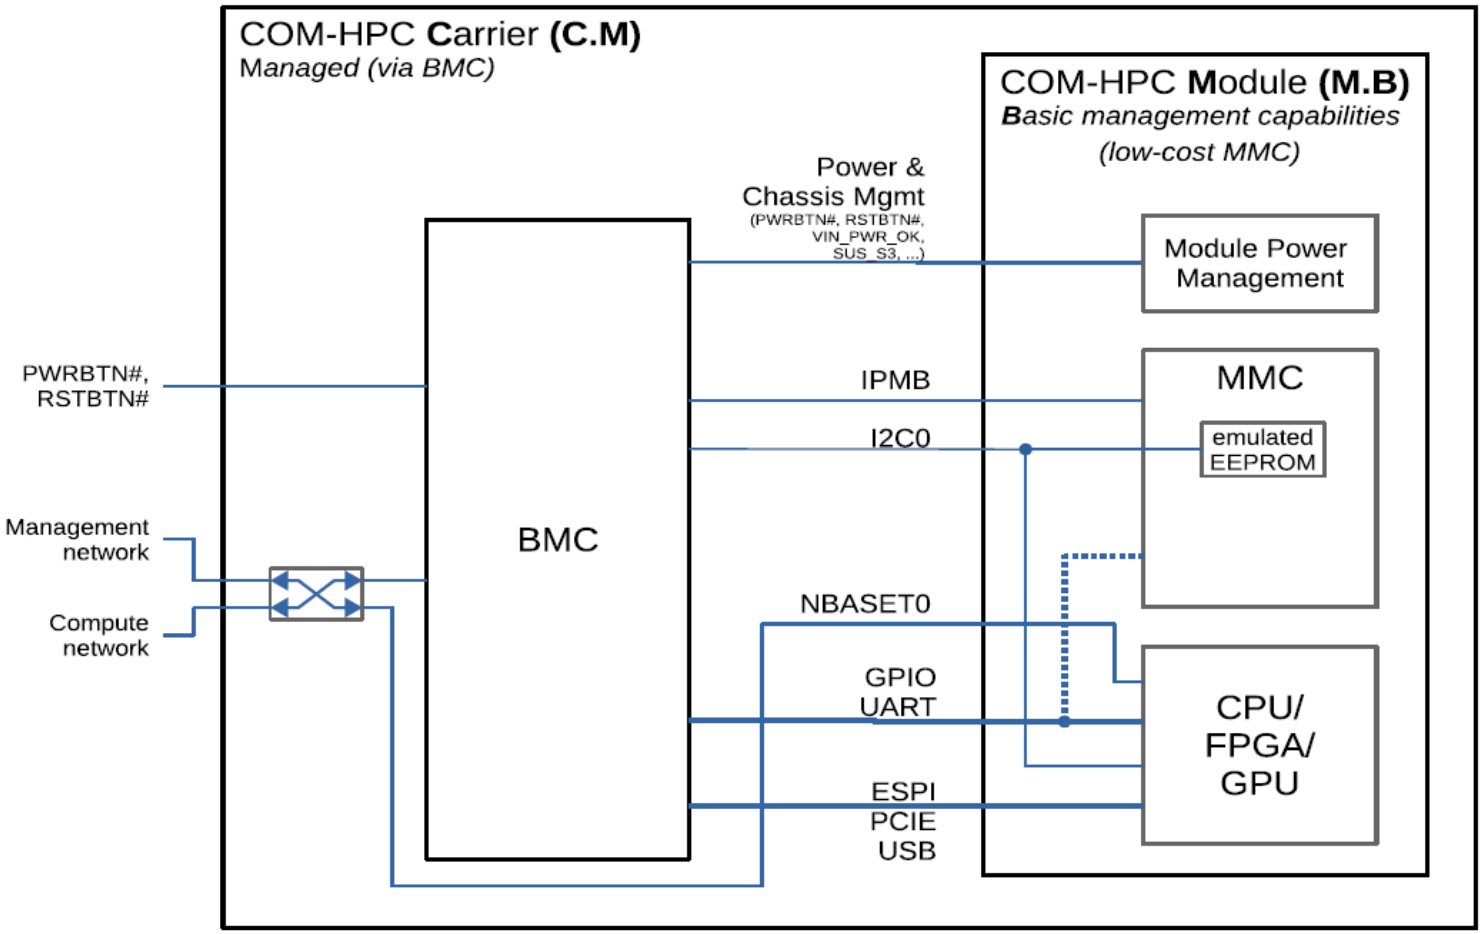

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

IPMI on COM-HPC

The COM-HPC management platform **shall** use an IPMI (Intelligent Platform Management Interface) for communication between the Carrier BMC and MMC, over the COM-HPC IPMB port. The interface from the BMC to the user is independent from this, and **may** be realized using Redfish, it **may** support IPMI for legacy support. The interface used for IPMI between BMC and MMC **shall** be IPMB (an I2C bus specifically for IPMI use.

As set of IPMI commands for communication between MMC and BMC have been defined in the **PICMG COM-HPC Platform Management Interface Specification**. Most of those commands are not specific to COM-HPC, but defined in the IPMI specification and related specifications. However, also some COM-HPC specific commands have been developed. Specifically, the following command sets are covered:

- IPM Device Global Commands: Initialization and module discovery
- BMC Watchdog and Device and Messaging Commands: System interface and BMC interaction.
- Chassis Device Commands: Power control and boot options
- Event Commands: IPMI event handling
- PEF and Alerting Commands: Alerting and trigger support
- Sensor Device Commands: Sensor monitoring and housekeeping
- FRU Device Commands: Inventory data
- SDR Device Commands: Sensor information
- SEL Device Commands: System event logging
- LAN Device Commands and HPM.2: Support for Ethernet
- Serial/Modem Device Commands: For UART and SOL support
- AdvancedTCA subset: For Fan Management
- HPM.1: For Firmware update
- HPM.2: For managing BMC-MMC Ethernet communication
- COM-HPC specific Commands: For fast sensors and JTAG support

The inventory data available via IPMI FRU also includes information present in the COM-HPC EEPROM (see Section **Error! Bookmark not defined.**). The COM-HPC EEPROM content is defined in the **PICMG Embedded EEPROM for COM-HPC** document, a companion document to the **PICMG COM-HPC Platform Management Interface Specification**. The information available in the COM-HPC EEPROM area will be converted from EeeP format into IPMI FRU data structures by the MMC. In order to accomplish this, the MMC reads the data from the EEPROM during start of the system, and buffers the data internally to service incoming IPMI FRU accesses.

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

The EEPROM area for storing EeeP data **may** be implemented as a physical EEPROM on the board, on the I2C0 bus. Alternatively, it **may** be realized within the MMC. This is illustrated in Figure 10 above. In that figure, it is labeled as an "emulated EEPROM". An I2C slave interface on the MMC is connected to the I2C0 bus of the COM-HPC module. This easesimplementation, as the MMC does not need to fetch information from the physical COM-HPC EEPROM, and also prevents potential access conflicts between the MMC and other I2C agents on the Baseboard or Carrier. The MMC implemented this way does not need I2C Master or Multi-Master capability.

COM-HPC EEPROM

Modules and Carriers for COM-HPC **should** implement an EEPROM which allows the identification of Module or Carrier features via I2C. This feature is similar to the COM Express EEPROM defined in the PICMG COM Express specification. Some Module vendors will find a benefit in software reuse with test scripts and software infrastructure developed for COM Express use. The COM-HPC EEPROM content is defined in the **EeeP for COM-HPC** (Embedded EEPROM for COM-HPC) document, a companion document to the **PICMG COM-HPC Platform Management Interface Specification**. The **EeeP for COM-HPC** specification is derived from the **Eeep for COM-Express** document and introduces new data structures specific to COM-HPC modules and carriers, while the data structures for COM Express modules and carriers remain untouched. A new revision has been assigned to distinguish between COM Express and COM-HPC EEPROMs.

EEPROM Device Information

If the COM Express Module and / or Carrier EEPROMs are implemented on COM-HPC, then the COM-HPC I2C0 port **shall** be used to interface to the EEPROMs. The EEPROM devices ***shall*** have a capacity of at least 32 Kbits, and ***shall*** have three address inputs. Suitable devices include the Atmel AT24C32C, the ST M24C32 and other compatible devices. Larger capacity devices may be used if they are compatible with the base 32 Kbit part referenced above.

COM-HPC Module EEPROM

The Module **should** implement a serial EEPROM that identifies the Module using the EeeP defined Unique Device ID. In addition this EEPROM **should** describe the available module interfaces and capabilities as described in the **EeeP for COM-HPC** specification. The EEPROM **may** be implemented as a physical EEPROM on the board, or may be realized within the MMC (see Section **Error! Bookmark not defined.**).

The Module EEPROM allows the Carrier Board to set up any software configurable Carrier Board features in a way that is appropriate for the Module board. The Module EEPROM I2C device address lines, A2, A1 and A0 **shall** be pulled to a logic low, placing the device at address 0x50 (7 bit I2C addressing) and address 0xA0(8 bit I2C addressing). **Note**: I2C address A6-A3 are fixed at 1010b for I2C EEPROM devices per the I2C specification.

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

COM-HPC Carrier Board EEPROM

The Carrier Board **should** implement a serial EEPROM that identifies the Carrier using the Unique Device Id and describes the expected PCI Express link configuration. In addition this EEPROM **may** describe the expected link presence for SATA, USB, DDI, VGA, LAN, audio, and the expected presence of miscellaneous I/O signals. The EEPROM **may** be implemented as a physical EEPROM on the board, or **may** be realized within the BMC (see Section **Error! Bookmark not defined.**).

The Carrier EEPROM allows the Module firmware to set up any software configurable Module features in a way that is appropriate for the Carrier Board. If there is an incompatibility between the expected Carrier Board configuration and the Module capabilities, an error message ***may*** be generated. The error messaging is Module vendor specific and is not defined by this standard.

The Carrier EEPROM device address lines, A2, A1 and A0 **shall** be pulled to a logic high, placing the device at address 0x57 (7 bit addressing) and 0xAE(8 bit addressing). I2C addresses A6-A3 are fixed at 1010b for I2C EEPROM devices.

2.8 Debug

40 pin flat cable connector to be used with DB40 HPC debug module

Supports BIOS POST code LED, BMC access, SPI BIOS flashing, internal power rail test points, debug LEDs

2.9 Power

Power Modes: AT and ATX mode

Standard Voltage Input: ATX 12V±5% / 5Vsb ±5% or AT 12V±5%
Power Management: ACPI 5.0 compliant, Smart Battery support
Power States: C1-C6, S0, S1, S5, S5 ECO mode (Wake-on-USB, WoL S5)

ECO Mode support for deep S5 for 5Vsb power saving

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2.10 Mechanical and Environmental

Form Factor and Specification

PICMG COM-HPC Rev 1.0, Server Type, Size D 200 x 160 mm

Operating Temperature

Standard	0°C to 60°C at 12V	Storage: -20°C to 80°C
Industrial	-20°C to 70°C at 12V	Storage: -20°C to 80°C

Operate at -40°C to 85°C at 12V is by project basis discussion

Humidity

5-90% RH operating, non-condensing, 5-95% RH storage (and operating with conformal coating)

Shock and Vibration

IEC 60068-2-64 and IEC-60068-2-27
MIL-STD-202F, Method 213B, Table 213-I, Condition A and Method 214A, Table 214-I, Condition D

HALT tested

Thermal Stress, Vibration Stress, Thermal Shock and Combined Test

EMI

EN55032 Class B inside an enclosure

Ultrasound equipment will typically be sensitive to noise in the 1MHz to 20MHz band, we shall handle it well during these bands

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

De-rating

De-rating file is provided by RD (delta temperature of some of components is based on the experience of previous products) and reviewed/approved by RRC team before each Gerber Out

Once we have real sample on-hand, the temperature of critical components shall be measured and feedback to the De-rating file to see if it still in specification.


MTBF

200,000 hrs commercial 40℃ ambient (according MIL calculation) based on actual calculated de-rating

120,000 hrs ETT -20℃~70℃ ambient (according MIL calculation) based on actual calculated de-rating (excludes the BCM57504 LAN controller)

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

3. Block Diagram

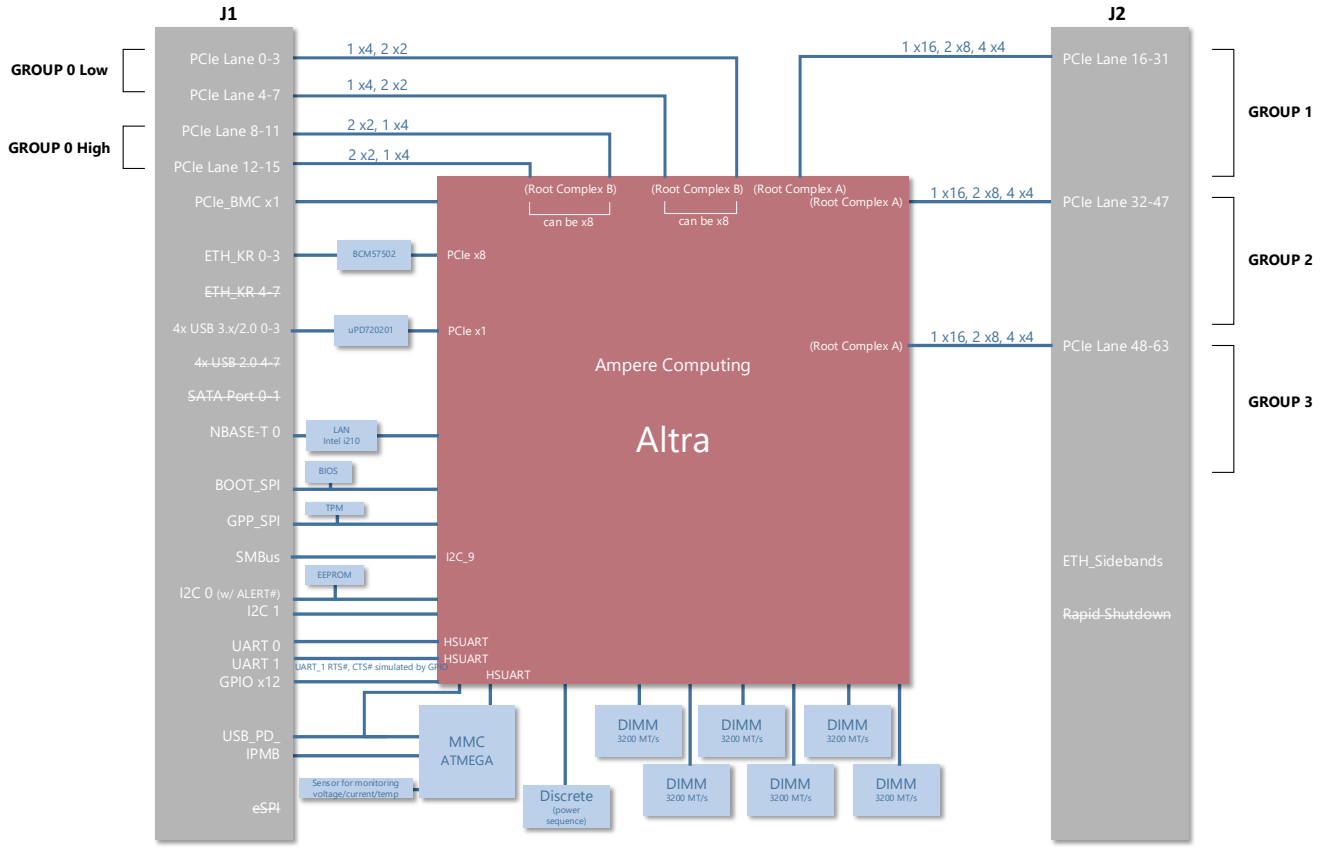

Note:
-All the PCIe are Gen4
-I2C_9 from Altra SOC supports CCIX mode code (ready now) or general purpose SMBUS mode code (TBC), either one
-UART_1: TX, RX come from SOC, RTS#, CTS# are simulated by SOC GPIO
-USB_PD_I2C, MMC, SOC: connect together

-need work with AST2500 Remote BMC on carrier

Figure 1 – Functional block diagram

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

4. Pinout and Signal Descriptions

4.1 Pin Summary

The below table is a comprehensive list of all signal pins supported on the dual 400-pin COM-HPC connectors (J1 and J2) as defined for Server Type in the PICMG COM-HPC Rev 1.0 specification. Signals described in the specification but not supported on the COM-HPC-ALT are marked by ~~strikethrough~~
ROW A/B/C/D on J1 connector, ROW E/F/G/H on J2 connector

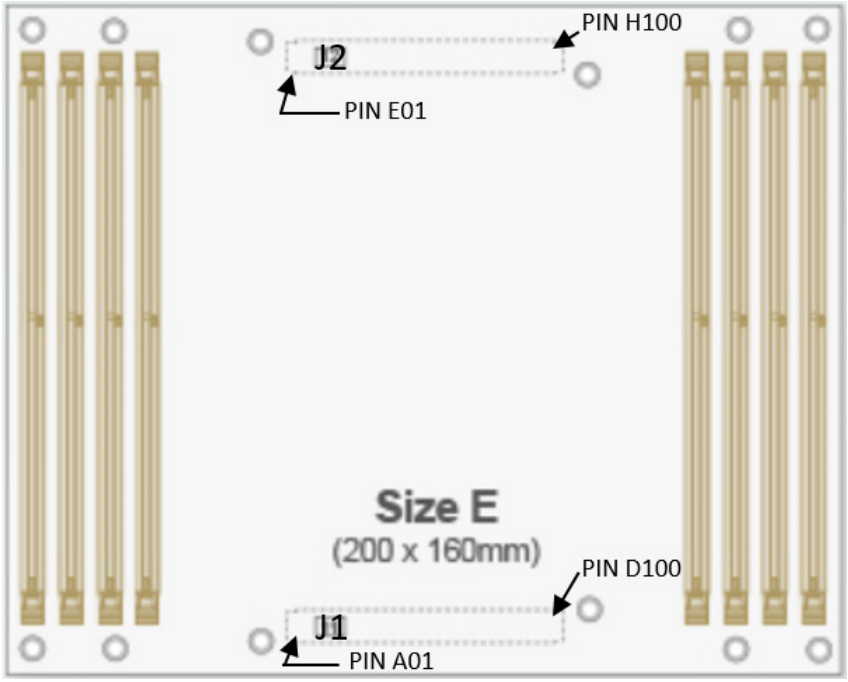


Figure 2 – Rear side row

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Row A			Row B			Row C			Row D	
A1	VCC		B1	VCC		C1	VCC		D1	VCC
A2	VCC		B2	PWRBTN#		C2	RSTBTN#		D2	VCC
A3	VCC		B3	VCC		C3	VCC		D3	VCC
A4	VCC		B4	THERMTRIP#		C4	CARRIER_HOT#		D4	VCC
A5	VCC		B5	VCC		C5	VCC		D5	VCC
A6	VCC		B6	~~TAMPER#~~		C6	VIN_PWR_OK		D6	VCC
A7	VCC		B7	VCC		C7	VCC		D7	VCC
A8	VCC		B8	~~SUS_S3#~~		C8	SUS_S4_S5#		D8	VCC
A9	VCC		B9	VCC		C9	VCC		D9	VCC
A10	GND		B10	WD_STROBE#		C10	GND		D10	WAKE0#
A11	BATLOW#		B11	WD_OUT		C11	FAN_PWMOUT		D11	WAKE1#
A12	PLTRST#		B12	GND		C12	FAN_TACHIN		D12	GND
A13	GND		B13	~~USB5-~~		C13	GND		D13	USB1-
A14	~~USB7-~~		B14	~~USB5+~~		C14	USB3-		D14	USB1+
A15	~~USB7+~~		B15	GND		C15	USB3+		D15	GND
A16	GND		B16	~~USB4-~~		C16	GND		D16	USB0-
A17	~~USB6-~~		B17	~~USB4+~~		C17	USB2-		D17	USB0+
A18	~~USB6+~~		B18	GND		C18	USB2+		D18	GND
A19	GND		B19	RSVD		C19	GND		D19	ETH0_RX-
A20	~~ETH4_RX-~~		B20	RSVD		C20	ETH0_TX-		D20	ETH0_RX+
A21	~~ETH4_RX+~~		B21	RSVD		C21	ETH0_TX+		D21	GND
A22	GND		B22	RSVD		C22	GND		D22	ETH1_RX-
A23	~~ETH5_RX-~~		B23	RSVD		C23	ETH1_TX-		D23	ETH1_RX+
A24	~~ETH5_RX+~~		B24	VCC_5V_SBY		C24	ETH1_TX+		D24	GND
A25	GND		B25	USB67_OC#		C25	GND		D25	ETH2_RX-
A26	~~ETH6_RX-~~		B26	~~USB45_OC#~~		C26	ETH2_TX-		D26	ETH2_RX+
A27	~~ETH6_RX+~~		B27	USB23_OC#		C27	ETH2_TX+		D27	GND
A28	GND		B28	USB01_OC#		C28	GND		D28	ETH3_RX-
A29	~~ETH7_RX-~~		B29	~~SML1_CLK~~		C29	ETH3_TX-		D29	ETH3_RX+
A30	~~ETH7_RX+~~		B30	~~SML1_DAT~~		C30	ETH3_TX+		D30	GND
A31	GND		B31	~~PMCALERT#~~		C31	GND		D31	USB3_SSTX-
A32	RSVD		B32	~~SML0_CLK~~		C32	USB3_SSRX-		D32	USB3_SSTX+
A33	RSVD		B33	~~SML0_DAT~~		C33	USB3_SSRX+		D33	GND
A34	GND		B34	~~USB_PD_ALERT#~~		C34	GND		D34	USB2_SSTX-
A35	~~ETH4_TX-~~		B35	USB_PD_I2C_CLK		C35	USB2_SSRX-		D35	USB2_SSTX+
A36	~~ETH4_TX+~~		B36	USB_PD_I2C_DAT		C36	USB2_SSRX+		D36	GND

Copyright © 2025 ADLINK Technology, Inc.
ADLINK Leading EDGE COMPUTING
LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Row A			Row B			Row C			Row D	
A37	GND		B37	~~USB_RT_ENA~~		C37	GND		D37	USB1_SSTX0-
A38	~~ETH5_TX-~~		B38	~~USB1_LSRX~~		C38	USB1_SSRX0-		D38	USB1_SSTX0+
A39	~~ETH5_TX+~~		B39	~~USB1_LSTX~~		C39	USB1_SSRX0+		D39	GND
A40	GND		B40	~~USB0_LSRX~~		C40	GND		D40	~~USB1_SSTX1-~~
A41	~~ETH6_TX-~~		B41	~~USB0_LSTX~~		C41	~~USB1_SSRX1-~~		D41	~~USB1_SSTX1+~~
A42	~~ETH6_TX+~~		B42	GND		C42	~~USB1_SSRX1+~~		D42	GND
A43	GND		B43	~~USB0_AUX-~~		C43	GND		D43	USB0_SSTX0-
A44	~~ETH7_TX-~~		B44	~~USB0_AUX+~~		C44	USB0_SSRX0-		D44	USB0_SSTX0+
A45	~~ETH7_TX+~~		B45	RSVD		C45	USB0_SSRX0+		D45	GND
A46	GND		B46	RSVD		C46	GND		D46	~~USB0_SSTX1-~~
A47	~~USB1_AUX-~~		B47	VCC_BOOT_SPI		C47	~~USB0_SSRX1-~~		D47	~~USB0_SSTX1+~~
A48	~~USB1_AUX+~~		B48	BOOT_SPI_CS#		C48	~~USB0_SSRX1+~~		D48	GND
A49	GND		B49	BSEL0		C49	GND		D49	~~SATA0_RX-~~
A50	~~eSPI_IO0~~		B50	BSEL1		C50	BOOT_SPI_IO0		D50	~~SATA0_RX+~~
A51	~~eSPI_IO1~~		B51	BSEL2		C51	BOOT_SPI_IO1		D51	GND
A52	~~eSPI_IO2~~		B52	~~eSPI_ALERT0#~~		C52	BOOT_SPI_IO2		D52	~~SATA0_TX-~~
A53	~~eSPI_IO3~~		B53	~~eSPI_ALERT1#~~		C53	BOOT_SPI_IO3		D53	~~SATA0_TX+~~
A54	~~eSPI_CLK~~		B54	~~eSPI_CS0#~~		C54	BOOT_SPI_CLK		D54	GND
A55	GND		B55	~~eSPI_CS1#~~		C55	GND		D55	~~SATA1_RX-~~
A56	PCIe_CLKREQ0_LO#		B56	~~eSPI_RST#~~		C56	PCIe_REFCLK0_HI-		D56	~~SATA1_RX+~~
A57	PCIe_CLKREQ0_HI#		B57	GND		C57	PCIe_REFCLK0_HI+		D57	GND
A58	GND		B58	PCIe_BMC_RX-		C58	GND		D58	~~SATA1_TX-~~
A59	PCIe_BMC_TX-		B59	PCIe_BMC_RX+		C59	PCIe_REFCLK0_LO-		D59	~~SATA1_TX+~~
A60	PCIe_BMC_TX+		B60	GND		C60	PCIe_REFCLK0_LO+		D60	GND
A61	GND		B61	PCIe08_RX-		C61	GND		D61	PCIe00_TX-
A62	PCIe08_TX-		B62	PCIe08_RX+		C62	PCIe00_RX-		D62	PCIe00_TX+
A63	PCIe08_TX+		B63	GND		C63	PCIe00_RX+		D63	GND
A64	GND		B64	PCIe09_RX-		C64	GND		D64	PCIe01_TX-
A65	PCIe09_TX-		B65	PCIe09_RX+		C65	PCIe01_RX-		D65	PCIe01_TX+
A66	PCIe09_TX+		B66	GND		C66	PCIe01_RX+		D66	GND
A67	GND		B67	PCIe10_RX-		C67	GND		D67	PCIe02_TX-
A68	PCIe10_TX-		B68	PCIe10_RX+		C68	PCIe02_RX-		D68	PCIe02_TX+
A69	PCIe10_TX+		B69	GND		C69	PCIe02_RX+		D69	GND
A70	GND		B70	PCIe11_RX-		C70	GND		D70	PCIe03_TX-
A71	PCIe11_TX-		B71	PCIe11_RX+		C71	PCIe03_RX-		D71	PCIe03_TX+
A72	PCIe11_TX+		B72	GND		C72	PCIe03_RX+		D72	GND

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Row A			Row B			Row C			Row D	
A73	GND		B73	PCIe12_RX-		C73	GND		D73	PCIe04_TX-
A74	PCIe12_TX-		B74	PCIe12_RX+		C74	PCIe04_RX-		D74	PCIe04_TX+
A75	PCIe12_TX+		B75	GND		C75	PCIe04_RX+		D75	GND
A76	GND		B76	PCIe13_RX-		C76	GND		D76	PCIe05_TX-
A77	PCIe13_TX-		B77	PCIe13_RX+		C77	PCIe05_RX-		D77	PCIe05_TX+
A78	PCIe13_TX+		B78	GND		C78	PCIe05_RX+		D78	GND
A79	GND		B79	PCIe14_RX-		C79	GND		D79	PCIe06_TX-
A80	PCIe14_TX-		B80	PCIe14_RX+		C80	PCIe06_RX-		D80	PCIe06_TX+
A81	PCIe14_TX+		B81	GND		C81	PCIe06_RX+		D81	GND
A82	GND		B82	PCIe15_RX-		C82	GND		D82	PCIe07_TX-
A83	PCIe15_TX-		B83	PCIe15_RX+		C83	PCIe07_RX-		D83	PCIe07_TX+
A84	PCIe15_TX+		B84	GND		C84	PCIe07_RX+		D84	GND
A85	GND		B85	RSVD		C85	GND		D85	NBASET0_MDI0-
A86	VCC_RTC		B86	RSMRST_OUT#		C86	SMB_CLK		D86	NBASET0_MDI0+
A87	~~SUS_CLK~~		B87	UART1_TX		C87	SMB_DAT		D87	GND
A88	GPIO_00		B88	UART1_RX		C88	SMB_ALERT#		D88	NBASET0_MDI1-
A89	GPIO_01		B89	UART1_RTS#		C89	UART0_TX		D89	NBASET0_MDI1+
A90	GPIO_02		B90	UART1_CTS#		C90	UART0_RX		D90	GND
A91	GPIO_03		B91	IPMB_CLK		C91	UART0_RTS#		D91	NBASET0_MDI2-
A92	GPIO_04		B92	IPMB_DAT		C92	UART0_CTS#		D92	NBASET0_MDI2+
A93	GPIO_05		B93	GPSPI_MOSI		C93	I2C0_CLK		D93	GND
A94	GPIO_06		B94	GPSPI_MISO		C94	I2C0_DAT		D94	NBASET0_MDI3-
A95	GPIO_07		B95	GPSPI_CS0#		C95	I2C0_ALERT#		D95	NBASET0_MDI3+
A96	GPIO_08		B96	GPSPI_CS1#		C96	I2C1_CLK		D96	GND
A97	GPIO_09		B97	~~GPSPI_CS2#~~		C97	I2C1_DAT		D97	NBASET0_LINK_MAX#
A98	GPIO_10		B98	~~GPSPI_CS3#~~		C98	NBASET0_SDP		D98	NBASET0_LINK_MID#
A99	GPIO_11		B99	GPSPI_CLK		C99	~~NBASET0_CTREF~~		D99	NBASET0_LINK_ACT#
A100	TYPE0		B100	GPSPI_ALERT#		C100	TYPE1		D100	TYPE2

Copyright © 2025 ADLINK Technology, Inc.
ADLINK Leading EDGE COMPUTING
LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Row E			Row F			Row G			Row H	
E1	~~RAPID_SHUTDOWN~~		F1	~~ETH2_SDP~~		G1	RSVD		H1	RSVD
E2	GND		F2	~~ETH3_SDP~~		G2	RSVD		H2	RSVD
E3	RSVD		F3	~~ETH4_SDP~~		G3	RSVD		H3	RSVD
E4	RSVD		F4	~~ETH5_SDP~~		G4	RSVD		H4	RSVD
E5	GND		F5	~~ETH6_SDP~~		G5	RSVD		H5	RSVD
E6	RSVD		F6	~~ETH7_SDP~~		G6	RSVD		H6	RSVD
E7	RSVD		F7	~~ETH4-7_I2C_CLK~~		G7	RSVD		H7	RSVD
E8	GND		F8	~~ETH4-7_I2C_DAT~~		G8	RSVD		H8	RSVD
E9	RSVD		F9	~~ETH4-7_INT#~~		G9	RSVD		H9	RSVD
E10	RSVD		F10	~~ETH4-7_MDIO_CLK~~		G10	RSVD		H10	RSVD
E11	GND		F11	~~ETH4-7_MDIO_DAT~~		G11	RSVD		H11	RSVD
E12	RSVD		F12	~~ETH4-7_PHY_INT#~~		G12	RSVD		H12	RSVD
E13	RSVD		F13	~~ETH4-7_PHY_RST#~~		G13	RSVD		H13	RSVD
E14	GND		F14	~~ETH4-7_PRSNT#~~		G14	GND		H14	RSVD
E15	RSVD		F15	RSVD		G15	RSVD		H15	RSVD
E16	RSVD		F16	RSVD		G16	RSVD		H16	RSVD
E17	GND		F17	RSVD		G17	RSVD		H17	RSVD
E18	RSVD		F18	RSVD		G18	RSVD		H18	RSVD
E19	RSVD		F19	GND		G19	RSVD		H19	GND
E20	GND		F20	PCIe32_RX-		G20	GND		H20	PCIe40_TX-
E21	PCIe32_TX-		F21	PCIe32_RX+		G21	PCIe40_RX-		H21	PCIe40_TX+
E22	PCIe32_TX+		F22	GND		G22	PCIe40_RX+		H22	GND
E23	GND		F23	PCIe33_RX-		G23	GND		H23	PCIe41_TX-
E24	PCIe33_TX-		F24	PCIe33_RX+		G24	PCIe41_RX-		H24	PCIe41_TX+
E25	PCIe33_TX+		F25	GND		G25	PCIe41_RX+		H25	GND
E26	GND		F26	PCIe34_RX-		G26	GND		H26	PCIe42_TX-
E27	PCIe34_TX-		F27	PCIe34_RX+		G27	PCIe42_RX-		H27	PCIe42_TX+
E28	PCIe34_TX+		F28	GND		G28	PCIe42_RX+		H28	GND
E29	GND		F29	PCIe35_RX-		G29	GND		H29	PCIe43_TX-
E30	PCIe35_TX-		F30	PCIe35_RX+		G30	PCIe43_RX-		H30	PCIe43_TX+
E31	PCIe35_TX+		F31	GND		G31	PCIe43_RX+		H31	GND
E32	GND		F32	PCIe36_RX-		G32	GND		H32	PCIe44_TX-
E33	PCIe36_TX-		F33	PCIe36_RX+		G33	PCIe44_RX-		H33	PCIe44_TX+
E34	PCIe36_TX+		F34	GND		G34	PCIe44_RX+		H34	GND
E35	GND		F35	PCIe37_RX-		G35	GND		H35	PCIe45_TX-
E36	PCIe37_TX-		F36	PCIe37_RX+		G36	PCIe45_RX-		H36	PCIe45_TX+

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Row E			Row F			Row G			Row H	
E37	PCIe37_TX+		F37	GND		G37	PCIe45_RX+		H37	GND
E38	GND		F38	PCIe38_RX-		G38	GND		H38	PCIe46_TX-
E39	PCIe38_TX-		F39	PCIe38_RX+		G39	PCIe46_RX-		H39	PCIe46_TX+
E40	PCIe38_TX+		F40	GND		G40	PCIe46_RX+		H40	GND
E41	GND		F41	PCIe39_RX-		G41	GND		H41	PCIe47_TX-
E42	PCIe39_TX-		F42	PCIe39_RX+		G42	PCIe47_RX-		H42	PCIe47_TX+
E43	PCIe39_TX+		F43	GND		G43	PCIe47_RX+		H43	GND
E44	GND		F44	PCIe16_RX-		G44	GND		H44	PCIe24_TX-
E45	PCIe16_TX-		F45	PCIe16_RX+		G45	PCIe24_RX-		H45	PCIe24_TX+
E46	PCIe16_TX+		F46	GND		G46	PCIe24_RX+		H46	GND
E47	GND		F47	PCIe17_RX-		G47	GND		H47	PCIe25_TX-
E48	PCIe17_TX-		F48	PCIe17_RX+		G48	PCIe25_RX-		H48	PCIe25_TX+
E49	PCIe17_TX+		F49	GND		G49	PCIe25_RX+		H49	GND
E50	GND		F50	PCIe18_RX-		G50	GND		H50	PCIe26_TX-
E51	PCIe18_TX-		F51	PCIe18_RX+		G51	PCIe26_RX-		H51	PCIe26_TX+
E52	PCIe18_TX+		F52	GND		G52	PCIe26_RX+		H52	GND
E53	GND		F53	PCIe19_RX-		G53	GND		H53	PCIe27_TX-
E54	PCIe19_TX-		F54	PCIe19_RX+		G54	PCIe27_RX-		H54	PCIe27_TX+
E55	PCIe19_TX+		F55	GND		G55	PCIe27_RX+		H55	GND
E56	GND		F56	PCIe20_RX-		G56	GND		H56	PCIe28_TX-
E57	PCIe20_TX-		F57	PCIe20_RX+		G57	PCIe28_RX-		H57	PCIe28_TX+
E58	PCIe20_TX+		F58	GND		G58	PCIe28_RX+		H58	GND
E59	GND		F59	PCIe21_RX-		G59	GND		H59	PCIe29_TX-
E60	PCIe21_TX-		F60	PCIe21_RX+		G60	PCIe29_RX-		H60	PCIe29_TX+
E61	PCIe21_TX+		F61	GND		G61	PCIe29_RX+		H61	GND
E62	GND		F62	PCIe22_RX-		G62	GND		H62	PCIe30_TX-
E63	PCIe22_TX-		F63	PCIe22_RX+		G63	PCIe30_RX-		H63	PCIe30_TX+
E64	PCIe22_TX+		F64	GND		G64	PCIe30_RX+		H64	GND
E65	GND		F65	PCIe23_RX-		G65	GND		H65	PCIe31_TX-
E66	PCIe23_TX-		F66	PCIe23_RX+		G66	PCIe31_RX-		H66	PCIe31_TX+
E67	PCIe23_TX+		F67	GND		G67	PCIe31_RX+		H67	GND
E68	GND		F68	PCIe48_RX-		G68	GND		H68	PCIe56_TX-
E69	PCIe48_TX-		F69	PCIe48_RX+		G69	PCIe56_RX-		H69	PCIe56_TX+
E70	PCIe48_TX+		F70	GND		G70	PCIe56_RX+		H70	GND
E71	GND		F71	PCIe49_RX-		G71	GND		H71	PCIe57_TX-
E72	PCIe49_TX-		F72	PCIe49_RX+		G72	PCIe57_RX-		H72	PCIe57_TX+

Copyright © 2025 ADLINK Technology, Inc.
ADLINK Leading EDGE COMPUTING
LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Row E			Row F			Row G			Row H	
E73	PCIe49_TX+		F73	GND		G73	PCIe57_RX+		H73	GND
E74	GND		F74	PCIe50_RX-		G74	GND		H74	PCIe58_TX-
E75	PCIe50_TX-		F75	PCIe50_RX+		G75	PCIe58_RX-		H75	PCIe58_TX+
E76	PCIe50_TX+		F76	GND		G76	PCIe58_RX+		H76	GND
E77	GND		F77	PCIe51_RX-		G77	GND		H77	PCIe59_TX-
E78	PCIe51_TX-		F78	PCIe51_RX+		G78	PCIe59_RX-		H78	PCIe59_TX+
E79	PCIe51_TX+		F79	GND		G79	PCIe59_RX+		H79	GND
E80	GND		F80	PCIe52_RX-		G80	GND		H80	PCIe60_TX-
E81	PCIe52_TX-		F81	PCIe52_RX+		G81	PCIe60_RX-		H81	PCIe60_TX+
E82	PCIe52_TX+		F82	GND		G82	PCIe60_RX+		H82	GND
E83	GND		F83	PCIe53_RX-		G83	GND		H83	PCIe61_TX-
E84	PCIe53_TX-		F84	PCIe53_RX+		G84	PCIe61_RX-		H84	PCIe61_TX+
E85	PCIe53_TX+		F85	GND		G85	PCIe61_RX+		H85	GND
E86	GND		F86	PCIe54_RX-		G86	GND		H86	PCIe62_TX-
E87	PCIe54_TX-		F87	PCIe54_RX+		G87	PCIe62_RX-		H87	PCIe62_TX+
E88	PCIe54_TX+		F88	GND		G88	PCIe62_RX+		H88	GND
E89	GND		F89	PCIe55_RX-		G89	GND		H89	PCIe63_TX-
E90	PCIe55_TX-		F90	PCIe55_RX+		G90	PCIe63_RX-		H90	PCIe63_TX+
E91	PCIe55_TX+		F91	GND		G91	PCIe63_RX+		H91	GND
E92	GND		F92	PCIe_REFCLK2-		G92	GND		H92	~~PCIe_REFCLKIN0-~~
E93	PCIe_REFCLK1-		F93	PCIe_REFCLK2+		G93	PCIe_REFCLK3-		H93	~~PCIe_REFCLKIN0+~~
E94	PCIe_REFCLK1+		F94	GND		G94	PCIe_REFCLK3+		H94	GND
E95	GND		F95	PCIe_CLKREQ3#		G95	GND		H95	~~PCIe_REFCLKIN1-~~
E96	PCIe_CLKREQ1#		F96	ETH0-3_PRSNT#		G96	~~ETH0-3_I2C_CLK~~		H96	~~PCIe_REFCLKIN1+~~
E97	PCIe_CLKREQ2#		F97	ETH0-3_PHY_RST#		G97	~~ETH0-3_I2C_DAT~~		H97	GND
E98	~~PCIe_CLKREQ_OUT0#~~		F98	~~ETH0_SDP~~		G98	ETH0-3_PHY_INT#		H98	~~ETH0-3_MDIO_CLK~~
E99	~~PCIe_CLKREQ_OUT1#~~		F99	~~ETH1_SDP~~		G99	ETH0-3_INT#		H99	~~ETH0-3_MDIO_DAT~~
E100	~~PCIe_PERST_IN0#~~		F100	~~PCIe_PERST_IN1#~~		G100	~~PCIe_WAKE_OUT0#~~		H100	~~PCIe_WAKE_OUT1#~~

Note: Strikethrough entries are functions not supported by this product.

IPMB is supported if there's MMC on module. No eSPI support on this platform

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

4.2 Signal Terminology Descriptions

Definitions of the terms used for signal description tables

Term	Description
I	Input to the module
O	Output from the module
I/O	Bi-directional Input / Output
OD	Open drain output from the module
I 3.3V	Input 3.3V tolerant
I 5V	Input 5V tolerant
O 3.3V	Output 3.3V signal level
O 5V	Output 5V signal level
I/O 3.3V	Bi-directional signal 3.3V tolerant
I/O 5V	Bi-directional signal 5V tolerant
I/O $3.3V_{SB}$	Input or output 3.3V tolerant active in standby state
DDC	Display Data Channel
PCIE	PCI Express compatible differential signal
PEG	PCI Express Graphics
SATA	Serial ATA specification Revision 2.6 and 3
LVDS	Low Voltage Differential Signal - 330 mV nominal; 450 mV maximum differential signal
P	Power Input / Output
REF	Reference voltage output. May be sourced from a Module power plane.
PDS	Pull-down strap. A Module output pin that is either tied to GND or is not connected. Used to signal Module capabilities to the Carrier Board.
PU	PU (pull-up) resistor on module
PD	PD (pull-down) resistor on module

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

4.3 Signal Descriptions on J1/J2 Connectors

4.3.1 Ethernet KR/KX

Ethernet KR interface are defined for COM-HPC. For these ports, the Ethernet MACs are located on COM-HPC module. PHYs (if used) are on the Carrier. In some cases, no PHY is required, for short cable ("Direct Attach" cables) or Carrier runs.

COM-HPC support both of MDIO and I2C control interfaces for the PHYs. The MDIO and I2C control interfaces are grouped into quads, for KR ports 0:3 and ports 4:7

Name	Pin #	Description	I/O	PU / PD	Comment
ETH0_TX- ETH0_TX+ ETH1_TX- ETH1_TX+ ETH2_TX- ETH2_TX+ ETH3_TX- ETH3_TX+	C20 C21 C23 C24 C26 C27 C29 C30	Ethernet KR ports, transmit output differential pairs.	O KR		AC coupled Off Module
ETH0_RX- ETH0_RX+ ETH1_RX- ETH1_RX+ ETH2_RX- ETH2_RX+ ETH3_RX- ETH3_RX+	D19 D20 D22 D23 D25 D26 D28 D29	Ethernet KR ports, receive input differential pairs.	I KR		AC coupled Off Module
~~ETH0-3_MDIO_DAT~~	~~H99~~	~~Management Data I/O interface mode data signal for serial data transfers between the MAC and an external PHY for ETHx ports 0 to 3~~	~~I/O 3.3VSB~~	~~PU 2K2~~	Not Supported
~~ETH0-3_MDIO_CLK~~	~~H98~~	~~Clock signal for Management Data I/O interface mode data signal for serial data transfers between the MAC and an external PHY for ETHx ports 0 to 3~~	~~O 3.3VSB~~		Not Supported
ETH0-3_INT#	G99	Active low interrupt signal from IO Port expanders for ETH ports 0 to 3	I 3.3VSB	PU 4K7	

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

ETH0-3_PHY_INT#	G98	Active low PHY interrupt signal from ETH ports 0 to 3	I 3.3VSB	PU 4K7	
ETH0-3_PHY_RST#	F97	Active low output PHY reset signal for ETH ports 0 to 3.	O 3.3VSB		
ETH0-3_I2C_DAT	G97	I2C data signal of the 2-wire management interface used by the Ethernet KR controller to access the management registers of an external SFP Module or to configure the Carrier PHY for ETHx ports 0 to 3 and for serialized status information (e.g. LED states)..	I/O OD 3.3VSB	PU 1K	
ETH0-3_I2C_CLK	G96	The I2C clock signals associated with ETH0-3 I2C data lines in the row above.	I/O OD 3.3VSB	PU 1K	
~~ETH0_SDP~~ ~~ETH1_SDP~~ ~~ETH2_SDP~~ ~~ETH3_SDP~~	~~F98~~ ~~F99~~ ~~F1~~ ~~F2~~	~~Software-Definable Pins. Can also be used for IEEE1588 support such as a PPS signal.~~	~~I/O~~ ~~3.3VSB~~		Not Supported
ETH0-3_PRSNT#	F96	Carrier pulls this line to GND if there is Carrier hardware present to support Ethernet KR signalling on ETH0 through ETH3. If the entire KR quad is not supported it should fill from ETH0 on up.	I 3.3VSB	PU 4K7	

Note: The Ethernet KR support is 10GBASE-KR

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

4.3.2 NBASE-T Ethernet

The port may operate in 10Gbps, 5Gbps, 2.5Gbps, 1Gbps, 100Mbps, or 10Mbps modes. Magnetics are to be on the Carrier board. The COM-HPC module shall be capable of 1000BASE-T mode.

Name	Pin #	Description	I/O	PU / PD	Comment
NBASET0_MDI0- NBASET0_MDI0+ NBASET0_MDI1- NBASET0_MDI1+ NBASET0_MDI2- NBASET0_MDI2+ NBASET0_MDI3- NBASET0_MDI3+	D85 D86 D88 D89 D91 D92 D93 D94	Ethernet Controller 1: Media Dependent Interface Differential Pairs 0,1,2,3. The MDI can operate in 10Gbps, 1Gbps, 100Mbps and 10 Mbps modes. Some pairs are unused in some modes, per the following: 10000BASE-T / 1000BASE-T: MDI[0]+/- B1_DA+/-; MDI[1]+/- B1_DB+/-; MDI[2]+/- B1_DC+/-; MDI[3]+/- B1_DD+/- 100BASE-TX: MDI[0]+/- TX+/-; MDI[1]+/- RX+/- 10BASE-T: MDI[0]+/- TX+/-; MDI[1]+/- RX+/-	I/O Analog		Twisted pair signals for external transformer.
NBASET0_LINK_ACT#	D99	NBASE-T Ethernet Controller activity indicator, active low. 20 mA or more current sink capability at VOL of 0.4V max. 20 mA or more current source capability at VOH of 2.4V min.	O 3.3VSB		Need add pull-high on carrier board
NBASET0_LINK_MAX#	D97	NBASE-T Ethernet Controller MAX Speed Link indicator, active low. If active, the link is established at the maximum speed that the Ethernet controller is capable of (which may be 10G, 5G, 2.5G etc). 20 mA or more current sink capability at VOL of 0.4V max. 20 mA or more current source capability at VOH of 2.4V min.	O 3.3VSB		
NBASET0_LINK_MID#	D98	NBASE-T Ethernet Controller MID Speed Link indicator, active low. If active, the link is established but at a speed lower than what the maximum speed that the Ethernet controller is capable of. 20 mA or more current sink capability at VOL of 0.4V max. 20 mA or more current source capability at VOH of 2.4V min.	O 3.3VSB		

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

~~NBASET0_CTREF~~	~~C99~~	~~Reference voltage for Carrier Board NBASET Ethernet channel 0 magnetics center tap. The reference voltage is determined by the requirements of the Module PHY and may be as low as 0V and as high as 3.3V. If not needed, these pins may be left open on the Carrier. The reference voltage output shall be current limited on the Module. In the case in which the reference is shorted to ground, the current shall be limited to 250 mA or less.~~	~~REF GND min 3.3V max~~		Not Supported
NBASET0_SDP	C98	NBASE-T Ethernet Controller 0 Software-Definable Pin. Can also be used for IEEE1588 support such as a 1pps signal.	IO 3.3VSB		

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

4.3.3 PCI Express

Name	Pin #	Description	I/O	PU / PD	Comment
PCIe00_TX+ PCIe00_TX- PCIe01_TX+ PCIe01_TX- PCIe02_TX+ PCIe03_TX- PCIe03_TX+ PCIe03_TX- PCIe04_TX+ PCIe04_TX- PCIe05_TX+ PCIe05_TX- PCIe06_TX+ PCIe06_TX- PCIe07_TX+ PCIe07_TX-	D62 D61 D65 D64 D68 D67 D71 D70 D74 D73 D77 D76 D80 D79 D83 D82	PCI Express Differential Transmit Pairs 0-7 PCIe Group 0 Low	O PCIe		AC coupled on Module
PCIe00_RX+ PCIe00_RX- PCIe01_RX+ PCIe01_RX- PCIe02_RX+ PCIe02_RX- PCIe03_RX+ PCIe03_RX- PCIe04_RX+ PCIe04_RX- PCIe05_RX+ PCIe05_RX- PCIe06_RX+ PCIe06_RX- PCIe07_RX+ PCIe07_RX-	C63 C62 C66 C65 C69 C68 C72 C71 C75 C74 C78 C77 C81 C80 C84 C83	PCI Express Differential Receive Pairs 0-7 PCIe Group 0 Low	I PCIe		AC coupled off Module
PCIe08_TX+ PCIe08_TX-	A63 A62	PCI Express Differential Transmit Pairs 8-15 PCIe Group 0 High	O PCIe		AC coupled on Module

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

PCIe09_TX+ PCIe09_TX- PCIe10_TX+ PCIe10_TX- PCIe11_TX+ PCIe11_TX- PCIe12_TX+ PCIe12_TX- PCIe13_TX+ PCIe13_TX- PCIe14_TX+ PCIe14_TX- PCIe15_TX+ PCIe15_TX-	A66 A65 A69 A68 A72 A71 A75 A74 A78 A77 A81 A80 A84 A83	A Server Module may map up to 8 higher bandwidth PCIe lanes to Group 0 High			
PCIe08_RX+ PCIe08_RX- PCIe09_RX+ PCIe09_RX- PCIe10_RX+ PCIe10_RX- PCIe11_RX+ PCIe11_RX- PCIe12_RX+ PCIe12_RX- PCIe13_RX+ PCIe13_RX- PCIe14_RX+ PCIe14_RX- PCIe15_RX+ PCIe15_RX-	B62 B61 B65 B64 B68 B67 B71 B70 B74 B73 B77 B76 B80 B79 B83 B82	PCI Express Differential Receive Pairs 8-15 PCIe Group 0 High A Server Module may map up to 8 higher bandwidth PCIe lanes to Group 0 High	I PCIe		AC coupled off Module
PCIe16_TX+ PCIe16_TX- PCIe17_TX+ PCIe17_TX- PCIe18_TX+ PCIe18_TX- PCIe19_TX+ PCIe19_TX- PCIe20_TX+	E46 E46 E49 E48 E52 E51 E55 E54 E58	PCI Express Differential Transmit Pairs 16-31 PCIe Group 1	O PCIe		AC coupled on Module

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

PCIe20_TX- PCIe21_TX+ PCIe21_TX- PCIe22_TX+ PCIe22_TX- PCIe23_TX+ PCIe23_TX- PCIe24_TX+ PCIe24_TX- PCIe25_TX+ PCIe25_TX- PCIe26_TX+ PCIe26_TX- PCIe27_TX+ PCIe27_TX- PCIe28_TX+ PCIe28_TX- PCIe29_TX+ PCIe29_TX- PCIe30_TX+ PCIe30_TX- PCIe31_TX+ PCIe31_TX-	E57 E61 E60 E64 E63 E67 E66 H45 H44 H48 H47 H51 H50 H54 H53 H57 H56 H60 H59 H63 H62 H66 H65				
PCIe16_RX+ PCIe16_RX- PCIe17_RX+ PCIe17_RX- PCIe18_RX+ PCIe18_RX- PCIe19_RX+ PCIe19_RX- PCIe20_RX+ PCIe20_RX- PCIe21_RX+ PCIe21_RX- PCIe22_RX+ PCIe22_RX- PCIe23_RX+ PCIe23_RX-	F45 F44 F48 F47 F51 F50 F54 F53 F57 F56 F60 F59 F63 F62 F66 F65	PCI Express Differential Receive Pairs 16-31 PCIe Group 1	I PCIe		AC coupled off Module

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

PCIe24_RX+ PCIe24_RX- PCIe25_RX+ PCIe25_RX- PCIe26_RX+ PCIe26_RX- PCIe27_RX+ PCIe27_RX- PCIe28_RX+ PCIe28_RX- PCIe29_RX+ PCIe29_RX- PCIe30_RX+ PCIe30_RX- PCIe31_RX+ PCIe31_RX-	G46 G45 G49 G48 G52 G51 G55 G54 G58 G57 G61 G60 G64 G63 G67 G66				
PCIe32_TX+ PCIe32_TX- PCIe33_TX+ PCIe33_TX- PCIe34_TX+ PCIe34_TX- PCIe35_TX+ PCIe35_TX- PCIe36_TX+ PCIe36_TX- PCIe37_TX+ PCIe37_TX- PCIe38_TX+ PCIe38_TX- PCIe39_TX+ PCIe39_TX- PCIe40_TX+ PCIe40_TX- PCIe41_TX+ PCIe41_TX- PCIe42_TX+ PCIe42_TX- PCIe43_TX+	E22 E21 E25 E24 E28 E27 E31 E30 E34 E33 E37 E36 E40 E39 E43 E42 H22 H21 H24 H23 H27 H26 H30	PCI Express Differential Transmit Pairs 32-47 PCIe Group 2	O PCIe		AC coupled on Module

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

PCIe43_TX- PCIe44_TX+ PCIe44_TX- PCIe45_TX+ PCIe45_TX- PCIe46_TX+ PCIe46_TX- PCIe47_TX+ PCIe47_TX-	H29 H33 H32 H36 H35 H39 H38 H42 H41				
PCIe32_RX+ PCIe32_RX- PCIe33_RX+ PCIe33_RX- PCIe34_RX+ PCIe34_RX- PCIe35_RX+ PCIe35_RX- PCIe36_RX+ PCIe36_RX- PCIe37_RX+ PCIe37_RX- PCIe38_RX+ PCIe38_RX- PCIe39_RX+ PCIe39_RX- PCIe40_RX+ PCIe40_RX- PCIe41_RX+ PCIe41_RX- PCIe42_RX+ PCIe42_RX- PCIe43_RX+ PCIe43_RX- PCIe44_RX+ PCIe44_RX- PCIe45_RX+ PCIe45_RX- PCIe46_RX+ PCIe46_RX-	F21 F20 F24 F23 F27 F26 F30 F29 F33 F32 F36 F35 F39 F38 F42 F41 G22 G21 G25 G24 G28 G27 G31 G30 G34 G33 G37 G36 G40 G39	PCI Express Differential Receive Pairs 32-47 PCIe Group 2	I PCIe		AC coupled off Module

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

PCIe47_RX+ PCIe47_RX-	G43 G42				
PCIe48_TX+ PCIe48_TX- PCIe49_TX+ PCIe49_TX- PCIe50_TX+ PCIe50_TX- PCIe51_TX+ PCIe51_TX- PCIe52_TX+ PCIe52_TX- PCIe53_TX+ PCIe53_TX- PCIe54_TX+ PCIe54_TX- PCIe55_TX+ PCIe55_TX- PCIe56_TX+ PCIe56_TX- PCIe57_TX+ PCIe57_TX- PCIe58_TX+ PCIe58_TX- PCIe59_TX+ PCIe59_TX- PCIe60_TX+ PCIe60_TX- PCIe61_TX+ PCIe61_TX- PCIe62_TX+ PCIe62_TX- PCIe63_TX+ PCIe63_TX-	E70 E69 E73 E72 E76 E75 E79 E78 E82 E81 E85 E84 E88 E87 E91 E90 H69 H68 H72 H71 H75 H74 H78 H77 H81 H80 H84 H83 H87 H86 H91 H90	PCI Express Differential Transmit Pairs 48-63 PCIe Group 3	O PCIe		AC coupled on Module
PCIe48_RX+ PCIe48_RX- PCIe49_RX+ PCIe49_RX-	F69 F68 F72 F71	PCI Express Differential Receive Pairs 48-63 PCIe Group 3	I PCIe		AC coupled off Module

Copyright © 2025 ADLINK Technology, Inc.
ADLINK Leading EDGE COMPUTING
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

PCIe50_RX+ PCIe50_RX- PCIe51_RX+ PCIe51_RX- PCIe52_RX+ PCIe52_RX- PCIe53_RX+ PCIe53_RX- PCIe54_RX+ PCIe54_RX- PCIe55_RX+ PCIe55_RX- PCIe56_RX+ PCIe56_RX- PCIe57_RX+ PCIe57_RX- PCIe58_RX+ PCIe58_RX- PCIe59_RX+ PCIe59_RX- PCIe60_RX+ PCIe60_RX- PCIe61_RX+ PCIe61_RX- PCIe62_RX+ PCIe62_RX- PCIe63_RX+ PCIe63_RX-	F75 F74 F78 F77 F81 F80 F84 F83 F87 F86 F90 F89 G70 G69 G73 G72 G76 G75 G79 G78 G82 G81 G85 G84 G88 G87 G91 G90				
PCIe_BMC_TX- PCIe_BMC_TX+	A59 A60	PCI Express Differential Transmit Pair for Carrier BMC (Board Management Controller)	O PCIe		AC coupled on Module
PCIe_BMC_RX- PCIe_BMC_RX+	B58 B59	PCI Express Differential Transmit Pair for Carrier BMC (Board Management Controller)	I PCIe		AC coupled off Module
PCIe_REFCLK0_LO- PCIe_REFCLK0_LO+	C59 C60	Reference clock pair for PCIe lanes [0:7], also referred to PCIe Group 0 Low and for the PCIe_BMC link	O PCIe		
PCIe_REFCLK0_HI- PCIe_REFCLK0_HI+	C57 C56	Reference clock pair for PCIe lanes [8:15], also referred to PCIe Group 0 High	O PCIe		

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

PCIe_REFCLK1- PCIe_REFCLK1+	E93 E94	Reference clock pair for PCIe lanes [16:31], also referred to PCIe Group 1	O PCIe		
PCIe_REFCLK2- PCIe_REFCLK2+	F92 F93	Reference clock pair for PCIe lanes [32:47], also referred to PCIe Group 2	O PCIe		
PCIe_REFCLK3- PCIe_REFCLK3+	G93 G94	Reference clock pair for PCIe lanes [48:63], also referred to PCIe Group 2	O PCIe		
PCIe_CLKREQ0_LO#	A56	PCIe reference clock request signals from Carrier devices for PCIe_REFCLK0_LO clock pair	I/O OD 3.3V	PU 10K	
PCIe_CLKREQ0_HI#	A57	PCIe reference clock request signals from Carrier devices for PCIe_REFCLK0_HI clock pair	I/O OD 3.3V	PU 10K	
PCIe_CLKREQ0_1#	E96	PCIe reference clock request signals from Carrier devices for PCIe_REFCLK1 clock pair	I/O OD 3.3V	PU 10K	
PCIe_CLKREQ0_2#	E97	PCIe reference clock request signals from Carrier devices for PCIe_REFCLK2 clock pair	I/O OD 3.3V	PU 10K	
PCIe_CLKREQ0_3#	F95	PCIe reference clock request signals from Carrier devices for PCIe_REFCLK3 clock pair	I/O OD 3.3V	PU 10K	

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

4.3.4 USB

The COM-HPC Server Module supports up to eight USB 2.0 ports, up to two USB 3.2 Gen1 or Gen2 ports and up to two USB 3.2 Gen2x2 ports or USB4 ports. A USB 3.2 Gen2x2 may be used as USB 3.2 Gen1 or Gen2 port as well.

To realize a COM-HPC USB 3.2 Gen1, Gen2, Gen2x2 or USB4 port, one of the four available USB 2.0 ports from the USB[0:3] pool must be used along with the SuperSpeed pins. The specific pairings noted in table below need to be made.

Name	Pin #	Description	I/O	PU / PD	Comment
USB0+ USB0- USB1+ USB1- USB2+ USB2- USB3+ USB3-	D17 D16 D14 D13 C18 C17 C15 C14	USB 2.0 differential pairs, channels 0 through 7. USB0 may be configured as a USB client or as a host, or both at the Module designer's discretion. All other USB ports, if implemented, shall be host ports. If any SuperSpeed ports are implemented, then they must be supported by a USB 2.0 port, using one of the USB[0:3] ports from this pool.	I/O 3.3VSB		USB 1.1/2.0 compliant This product only support USB0-3 through a PCIe to USB IC
USB0_SSTX0+ USB0_SSTX0- USB1_SSTX0+ USB1_SSTX0-	D44 D43 D38 D37	Four sets of SuperSpeed transmit pairs, used to realize the transmit side of two USB 3.2 Gen 2x2 ports. Alternatively, USB 3.2 Gen 1 or Gen 2 ports (single TX pair, single RX pair per port) may be implemented using a portion of this interface. These ports shall be used in conjunction with the corresponding USB 2.0 port pair (e.g. USB0_SSxxx+/- shall be used with the USB0 USB 2.0 pair and so on, USB1_SSxxx+/- with the USB1 USB 2.0 pair).	O PCIe		AC coupled on Module This product only support USB0-3 (up to USB 3.2 Gen1) through a PCIe to USB IC
USB0_SSRX0+ USB0_SSRX0- USB1_SSRX0+ USB1_SSRX0-	C45 C44 C39 C38	Four sets of SuperSpeed receive pairs, used to realize the transmit side of two USB 3.2 Gen 2x2 ports. Alternatively, USB 3.2 Gen 1 or Gen 2 ports (single TX pair, single RX pair per port) may be implemented using a portion of this interface.	I PCIe		AC coupled off Module This product only support USB0-3 (up to USB 3.2 Gen1) through a PCIe to USB IC

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

		These ports shall be used in conjunction with the corresponding USB 2.0 port pair (e.g. USB0_SSxxx+/- shall be used with the USB0 USB 2.0 pair and so on, USB1_SSxxx+/- with the USB1 USB 2.0 pair).			
USB2_SSTX+ USB2_SSTX- USB3_SSTX+ USB3_SSTX-	D35 D34 D32 D31	Two sets of high speed transmit pairs, to realize two USB 3.2 Gen 1 or Gen 2 implementations. These ports shall be used in conjunction with the corresponding USB 2.0 port pair (e.g. USB2_SSxxx+/- shall be used with the USB2 USB 2.0 pair and USB3_SSxxx+/- with the USB3 USB 2.0 pair).	O PCIe		AC coupled on Module This product only support USB0-3 (up to USB 3.2 Gen1) through a PCIe to USB IC
USB2_SSRX+ USB2_SSRX- USB3_SSRX+ USB3_SSRX-	C36 C35 C33 C32	Two sets of high speed receive pairs, to realize two USB 3.2 Gen 1 or Gen 2 implementations. These ports shall be used in conjunction with the corresponding USB 2.0 port pair (e.g. USB2_SSxxx+/- shall be used with the USB2 USB 2.0 pair and USB3_SSxxx+/- with the USB3 USB 2.0 pair).	I PCIe		AC coupled off Module This product only support USB0-3 (up to USB 3.2 Gen1) through a PCIe to USB IC
USB01_OC# USB23_OC# ~~USB45_OC#~~ USB67_OC#	B28 B27 ~~B26~~ B25	USB over-current sense, USB channels 0,1; channels 2,3; channels 4,5 and channels 6,7 respectively. A pull-up for each of these lines to the 3.3V Suspend rail shall be present on the Module. The pull-up should be 10K. An open drain driver from USB current monitors on the Carrier Board may drive this line low. The Carrier Board shall not pull these lines up. Note that the over-current limits for USB 2.0 and USB 3.0 are different; this is a Carrier board implementation item.	I 3.3VSB	PU 10K 3.3VSB	Do not pull high on carrier
RSMRST_OUT#	B86	USB devices that are to be powered in the S5 / S4 / S3 Suspend states should not have their 5V VBUS power enabled before RSMRST_OUT# transitions to the hi state. RSMRST_OUT# is also described in Power and System Management section	O 3.3VSB		

Copyright © 2025 ADLINK Technology, Inc.
ADLINK Leading EDGE COMPUTING
LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

This platform doesn't support USB4, thus additional signals required by USB4 are not shown here.

4.3.5 Asynchronous Serial Port

Two logic level Module "5 wire" (TX, RX, RTS#, CTS#, GND) asynchronous serial ports are provided for general purpose use and for use with debugging software that make use of the "console redirect" features available in many BIOS and operating systems. The Module BIOS should support "console redirect" to the UART0 port.

It is preferred that if the Module is based on an Intel x86 architecture, the Module serial ports be I/O mapped and be register compatible with the National Semiconductor 16550 UARTs that were used in the PC AT architecture.

The Module asynchronous serial ports *should not* be implemented as USB peripherals, as such implementations are generally not useful for low level debug purposes.

The COM-HPC UART signals are "logic level" signals and are the logic inverse of what is on an RS-232 line. The "Mark" (logic 1) voltage level is nominally 3.3V on the COM-HPC line and the "Space" (logic 0) is nominally 0V. RS-232 transceivers (on the Carrier) invert the signals and change the levels – so that a "Mark" is between -3V and -25V, and a "Space" is between +3V and +25V

In some situations, the UARTx_RTS# line can be used alternatively as an RS485 transmit enable line.

Name	Pin #	Description	I/O	PU / PD	Comment
UART0_TX UART1_TX	C89 B87	Logic level asynchronous serial port transmit signal	O 3.3V		
UART0_RX UART1_RX	C90 B88	Logic level asynchronous serial port receive signal	I 3.3V	PU 10K	
UART0_RTS# UART1_RTS#	C91 B89	Logic level asynchronous serial port Request to Send signal, active low	O 3.3V		
UART0_CTS# UART1_CTS#	C92 B90	Logic level asynchronous serial port Clear to Send input, active low	I 3.3V		

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

4.3.6 I2C

Two general purpose I2C ports are defined for COM-HPC. The first of the two supports an ALERT# input. The ports shall support 100KHz operation and should 400KHz operation. The ports should be multi-master capable. I2C0 is defined to operate from a 3.3V rail and I2C1 from a 1.8V rail. The I2C1 port may be I3C capable.

I2C source from Ampere Altra SOC supports multi-master

Name	Pin #	Description	I/O	PU / PD	Comment
I2C0_CLK	C93	Clock I/O line for the general purpose I2C0 port	I/O OD 3.3VSB	PU 2K2 3.3VSB	
I2C0_DAT	C94	Data I/O line for the general purpose I2C0 port	I/O OD 3.3VSB	PU 2K2 3.3VSB	
I2C0_ALERT#	C95	Alert input / interrupt for I2C0	I 3.3V	PU 2K2 3.3VSB	
I2C1_CLK	C96	Clock I/O line for the general purpose I2C1 port	I/O OD 1.8VSB	PU 4K7 1.8VSB	I3C Not supported
I2C1_DAT	C97	Data I/O line for the general purpose I2C1 port	I/O OD 1.8VSB	PU 4K7 1.8VSB	I3C Not supported

Note: multi-master support is I2C0 and I2C1

Supports 100KHz, 400KHz, and 1MHz

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

4.3.7 Port 80 Support on USB_PD I2C Bus

COM-HPC Module should support exporting Port 80 information over the USB_PD I2C bus (signals USB_PD_I2C_DAT and USB_PD_I2C_CLK) (pin B36 and B35) to Carrier hardware that implements a pair of 7-segment displays to show the codes.

4.3.8 IPMB

An IPMB (Intelligent Platform Management Bus) port is defined for both the Client and Server pinout types for platform management functions. The IPMB is used (optionally) with a Carrier based BMC (Board Management Controller) Master. On the Module, the IPMB should be routed to and used with a MMC (Module Management Controller). The Module IPMB is a slave port. See Section **Error! Bookmark not defined.** below for more details on platform management topics.

Name	Pin #	Description	I/O	PU / PD	Comment
IPMB_CLK	B91	Clock I/O line for the multi-master IPMB port	I/O OD 3.3VSB	PU 2K2 3.3VSB	
IPMB_DAT	B92	Data I/O line for the multi-master IPMB port	I/O OD 3.3VSB	PU 2K2 3.3VSB	

Note: Weak pull-up values are shown for the IPMB CLK and DAT lines in Table above. These are merely to prevent the lines from floating if no Carrier BMC is present. Stiffer pull-ups should be implemented on the Carrier with values appropriate to the situation at hand if the Carrier implements a BMC and an IPMB master.

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

4.3.9 General Purpose SPI

Name	Pin #	Description	I/O	PU / PD	Comment
GP_SPI_MISO	B94	Serial data into the COM-HPC Module from the Carrier GP_SPI device ("Master In Slave Out")	I 3.3V		
GP_SPI_MOSI	B93	Serial data from the COM-HPC Module to the Carrier GP_SPI device ("Master Out Slave In")	O 3.3V		
GP_SPI_CLK	B99	Clock from the Module to Carrier GP_SPI device	O 3.3V		
GP_SPI_CS0# GP_SPI_CS1# ~~GP_SPI_CS2#~~ ~~GP_SPI_CS3#~~	B95 B96 B97 B98	GP_SPI chip selects, active low	O 3.3V		GP_SPI CS2 and CS3 are not supported.
GP_SPI_ALERT#	B100	Alert (interrupt) from a Carrier GP_SPI device to the Module	I 3.3V	PU 10K	

4.3.10 Power & System Management

VIN_PWR_OK indicates that all the power to the Module is stable within the specified range and can be used to enable Module internal power supplies.

Name	Pin #	Description	I/O	PU / PD	Comment
PWRBTN#	B02	A falling edge creates a power button event. Power button events can be used to bring a system out of S5 soft off and other suspend states, as well as powering the system down.	I 3.3VSB	PU 10K	
RSTBTN#	C02	Reset button input. Active low request for Module to reset and reboot. May be falling edge sensitive. For situations when RSTBTN# is not able to reestablish control of the system, VIN_PWR_OK or a power cycle ***may*** be used.	I 3.3VSB	PU 90K	
PLTRST#	A12	Platform Reset: output from Module to Carrier Board. Active low. Issued by Module chipset and ***may*** result from a low RSTBTN# input, a low VIN_PWR_OK input, a VCC power input that falls below the	O 3.3VSB		

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

		minimum specification, a watchdog timeout, or ***may*** be initiated by the Module software..			
VIN_PWR_OK	C06	Power OK from main power supply. A high value indicates that the power is good. This signal can be used to hold off Module startup to allow Carrier based FPGAs or other configurable devices time to be programmed.	I 3.3V	PU 10K	
~~SUS_S3#~~	~~B08~~	~~Indicates system is in Suspend to RAM state. Active low output. An inverted copy of SUS_S3# on the Carrier Board **should** be used to enable the non-standby power on a typical ATX supply.~~ ~~Even in single input supply system implementations (AT mode, no standby input), the SUS_S3# Module output should be used disable any Carrier voltage regulators when SUS_S3# is low, to prevent bleed leakage from Carrier circuits into the Module.~~	~~O 3.3VSB~~		Not Supported
SUS_S4_S5#	C08	Indicates system is in Suspend to Disk (S4) or Soft Off (S5) state. Active low output.	O 3.3VSB		
SUS_CLK	A87	32.768 kHz +/- 100 ppm clock used by Carrier peripherals such as M.2 cards in their low power modes.	O 3.3VSB		
WAKE0#	D10	PCI Express wake up signal.	I/O 3.3VSB	PU 10K	
WAKE1#	D11	General purpose wake up signal. May be used to implement wake-up on PS2 keyboard or mouse activity.	I 3.3VSB	PU 10K	
BATLOW#	A11	Indicates that external battery is low. This port provides a battery-low signal to the Module for orderly transitioning to power saving or power cut-off ACPI modes.	I 3.3VSB	PU 10K	
~~TAMPER#~~	~~B06~~	~~Tamper or Intrusion detection line on VCC_RTC power well. Carrier hardware pulls this low on a Tamper event.~~			Not Supported
RSMRST_OUT#	B86	This is a buffered copy of the internal Module RSMRST# (Resume Reset, active low) signal. The internal Module RSMRST# signal is an input to the chipset or SOC and when it transitions from low to high it indicates that the suspend well power rails are stable. USB devices on the Carrier that are to be active in S5 / S3 / S0 should not have their 5V supply applied before RSMRST_OUT# goes high. RSMRST_OUT# shall be a 3.3V CMOS Module output, active in all power states.	O 3.3VSB		

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

4.3.11 Thermal Protection

Name	Pin #	Description	I/O	PU / PD	Comment
CARRIER_HOT#	C04	Input from off-Module temp sensor indicating an over-temp situation.	I 3.3V	PU 4.7K	
THERMTRIP#	B04	Active low output indicating that the CPU has entered thermal shutdown.	O 3.3V		

4.3.12 SMBus

Name	Pin #	Description	I/O	PU / PD	Comment
SMB_CLK	C86	System Management Bus bidirectional clock line.	I/O OD 3.3VSB	PU 2.2K	The maximum capacitance on the Carrier Board shall not exceed 100pF
SMB_DAT	C87	System Management Bus bidirectional data line.	I/O OD 3.3VSB	PU 2.2K	The maximum capacitance on the Carrier Board shall not exceed 100Pf
SMB_ALERT#	C88	System Management Bus Alert – active low input can be used to generate an SMI# (System Management Interrupt) or to wake the system.	I 3.3VSB	PU 10K	The maximum capacitance on the Carrier Board shall not exceed 100pF

4.3.13 General Purpose Input Outputs

Name	Pin #	Description	I/O	PU / PD	Comment
GPIO_00 GPIO_01 GPIO_02 GPIO_03 GPIO_04 GPIO_05 GPIO_06 GPIO_07 GPIO_08	A88 A89 A90 A91 A92 A93 A94 A95 A96	General purpose input / output pins. Upon a hardware reset, these pins should be configured as inputs. As inputs, these pins should be able to generate an interrupt to the Module host.	I/O 3.3VSB	PU 100K 3.3VSB	

Copyright © 2025 ADLINK Technology, Inc.
ADLINK Leading EDGE COMPUTING
LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

GPIO_09 GPIO_10 GPIO_11	A97 A98 A99				

4.3.14 Module Type Definition

Name	Pin #	Description	I/O	Comment
TYPE0 TYPE1 TYPE2	A100 C100 D100	The TYPE pins indicate to the Carrier Board the Pin-out Type that is implemented on the Module. The pins are tied on the Module to either ground (GND) or are no-connects (NC). These pins shall be pulled up on the Carrier, to Carrier standby voltage rail of 5V or less. Carrier hardware reads the level on these straps. **Module Connections** **Meaning** **Ref** **TYPE2** **TYPE1** **TYPE0** **7** NC NC NC Reserved **6** NC NC GND Reserved **5** NC GND NC Reserved **4** NC GND GND Server Module – Fixed 12V input **3** GND NC NC Reserved **2** GND NC GND Reserved **1** GND GND NC Client Module - Wide Range 8V to 20V input **0** GND GND GND Client Module – Fixed 12V input The Module shall implement all three TYPE[x] pins per the table above. The Carrier Board should implement combinatorial logic that monitors the Module TYPE pins and keeps power off (e.g deactivates the ATX PS_ON# signal to an ATX power supply or otherwise deactivates VCC to the COM-HPC Module) if an incompatible Module pin-out type is detected. All three TYPE[x] pins should be monitored by the Carrier. The Carrier Board logic may also implement a fault indicator such as an LED.		Server Module – Fixed 12V input

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

4.3.15 Miscellaneous Signals

Name	Pin #	Description	I/O	PU / PD	Comment
WD_OUT	B11	Output indicating that a watchdog time-out event has occurred. Refer to Section 5.3 for details.	O 3.3V		
WD_STROBE#	B10	Strobe input to watchdog timer. Periodic strobing prevents the watchdog, if enabled, from timing out.	I 3.3V		
FAN_PWMOUT	C11	Fan speed control for a secondary system fan. The primary fan control signals for CPU thermal management are on the Module, along with a vendor specific connector. Fan controls use the Pulse Width Modulation (PWM) technique to control the fan's RPM. CMOS output; Carrier designers should buffer this signal with an open drain FET and pullup or other robust Carrier device(s).	O 3.3V		
FAN_TACHIN	C12	Fan tachometer input for a fan with a two pulse output for the secondary fan.	I OD 3.3V	PU 10K	
RSVD		Reserved pins. These may be assigned functions in future versions of this specification. Reserved pins shall not be connected to anything, and shall not be connected to each other.			

WD_OUT

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

If a Module supports a watchdog timer it shall minimally support output mode 1 and may also support output modes 2 or 3 as defined in the table below. The selection of the output modes may be realized by software configurable hardware or by Module build options.

WD Mode	Description	Comment
1	The Module generates an internal reset. Module output pin PLTRST# is driven low. The WD_OUT pin is driven high until the unit resets.	
2	The Module only drives WD_OUT pin high until cleared by Module software.	
3	The Module generates an NMI. The WD_OUT pin is driven high until cleared by Module software.	

The watchdog output shall come up as a logic low and shall be disabled upon power-on-reset (VCC power cycle) or external system reset (when RSTBTN# pin is toggled low by external hardware). The watchdog may be enabled by BIOS or system software.

WD_STROBE#

Typically, the watchdog parameters (output options, enabling, enable delay, timeout delay) are managed by the Module BIOS, often via a BIOS setup screen. The regular watchdog software strobes to prevent a watchdog timeout are typically handled by the Module's application software. There may be API abstractions to isolate the application software from the watchdog hardware.

In COM-HPC (unlike COM-Express), there is a hardware strobe option. Carrier board hardware may periodically drive ("strobe") the Module WD_STROBE# input pin low to keep the watchdog from timing out.

The software and hardware strobes should be implemented as a logical OR by the Module design, so that either method may be used, or both, to keep the watchdog from timing out.

The software programmable Watchdog Enable Delay is the time between when the watchdog is enabled by firmware and when the first watchdog strobe is needed to prevent a watchdog time out. The enable delay allows time for the operating system to boot and the application to load and initialize. This feature is sometimes referred to as a "two stage" watchdog. After the initial Enable Delay, the enabled watchdog must be periodically strobed by software to prevent a watchdog timeout. The Strobe Interval shall be software programmable. Recommended ranges in enable delay and max strobe periods are given in the following table.

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

	Min Value	Max Value
Enable Delay	1 second	10 minutes
Strobe Interval	0.1 second	10 minutes


4.3.16 Power and Ground

Name	Pin #	Description	I/O	PU / PD	Comment
VCC	A01-A09 B01 B03 B05 B07 B09 C01 C03 C05 C07 C09 D01-D09	Primary power input: fixed +12V on the Client Type 0; wide range +8V to +20V on the Client Type 1; fixed +12V on the Server. All available VCC pins on the connector shall be used.	P		12V +/- 5%
VCC_5V_SBY	B24	Standby power input: +5.0V nominal. Only used for standby and suspend functions. May be left unconnected if these functions are not used in the system design.	P		5VSB +/- 5%
VCC_RTC	A86	Real-time clock circuit-power input. Nominally +3.0V.	P		
GND		Ground - DC power and signal and AC signal return path. All available GND connector pins shall be used and tied to Carrier Board GND plane(s).	P		

Copyright © 2025 ADLINK Technology, Inc.
ADLINK Leading EDGE COMPUTING
LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

5. Additional Features

This chapter describes the connectors, LEDs, and switches, located on the module and are not necessarily included in the PICMG standard specification. The locations of these parts are as shown below:

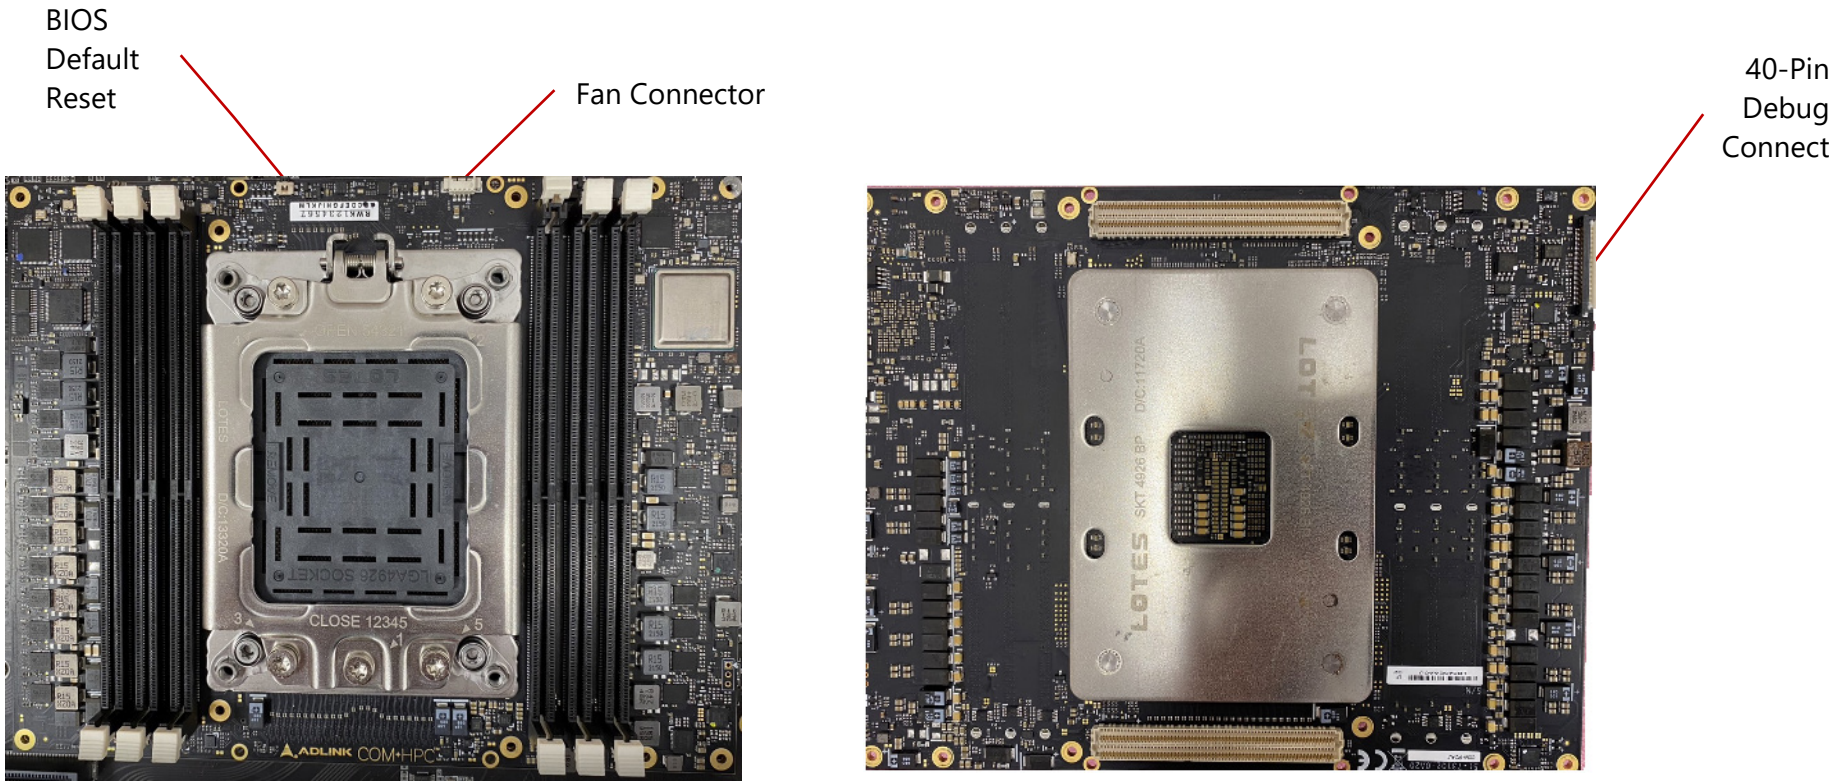



Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

5.1 Debug Connector (40-pin connector)

This connector is particular useful during carrier design and bring up phase. It offers access to the following critical parts of the module:

- Test points for measurement of internal power rails
- SPI BIOS programming interface
- I2C bus for BIOS POST code readout
- BMC programming interface

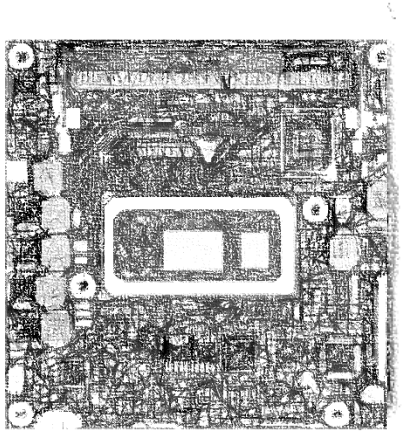


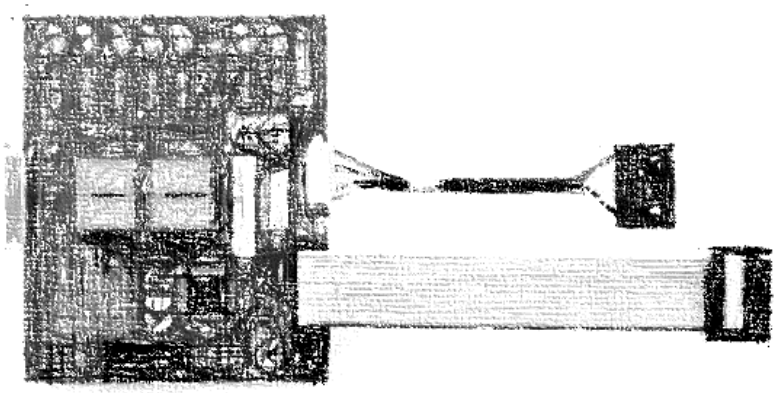

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

5.2 Status LEDs

Status LEDs are mounted on the module as below

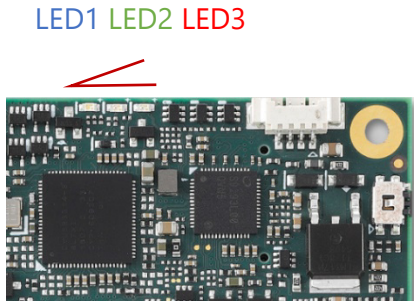


Name	Color	Connection	Function
LED1	Blue	BMC output	Power Sequence Status Code (BMC) Power Changes, Reset (see Exception Codes Table below)
LED2	Green	Power Source 3Vcc	S0 LED ON S3/S4/S5 LED OFF ECO mode LED OFF
LED3	Red	BMC output and same signal as WDT (B27) on BtB connector	Module power up WD LED = LED OFF Watchdog counting WD LED = Keep Last State Watchdog timed out WD LED = LED ON Watchdog RESET WD LED = LED ON Rebooted after WD RESET WD LED = LED ON Rebooted after PWRBTN WD LED = LED OFF Rebooted after RESET BTN WD LED = LED OFF Note: only a Reset not initiated by the BMC can clear the WD LED (user action)

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

5.3 Fan Connector

Connector Type: JVE 24W1125A-04M00

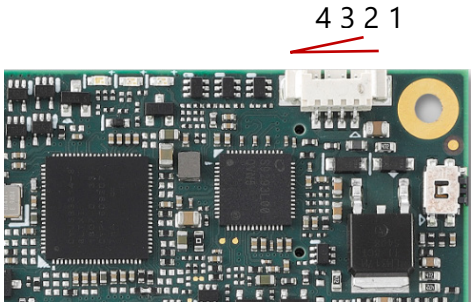


Name	Description
1	FAN_PWMOUT
2	FAN_TACHIN
3	GND
4	12V*

The supply voltage and maximum current of the fan connector is dependent on the module's input voltage (VCC_12V pins)

- If the module's input voltage is 12V or lower, the supply voltage will be equal to the module's input voltage and the maximum supply current of the fan connector will be TBC mA.
- If the module's input voltage is from 12V to 20V, the supply voltage will be 12V (± 5%) and the maximum supply current of the fan connector will be TBC mA..

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

5.4 BIOS Default Reset (update later)



To perform a hardware reset of the default BIOS settings, follow the steps below:

1. Shut down the system.
2. Hold down the BIOS Setup Defaults Reset Button continuously and boot up the system. You can release the button when the BIOS prompt screen appears.
3. The BIOS prompt screen will display a confirmation that BIOS defaults have been reset and request that you reboot the system.



Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

5.5 BIOS Boot Select (update later)

The module has two BIOS chips (BOM option) and BIOS operation can be configured to "PICMG" and dual-BIOS "Failsafe" modes using the BIOS Select and Mode Configuration Switch, Pin 2.

Setting the module to PICMG mode will configure the BIOS chips on the module as SPI0 and SPI1. In PICMG mode, a BIOS chip cannot be placed in the SPI0 slot on the carrier.

In dual-BIOS Failsafe mode, both BIOS chips on the module are configured as SPI1. Only one of the two is connected to the SPI bus at any given time. In case of failure of the primary SPI1 BIOS, the system will reboot and switch to the secondary SPI1 BIOS on the module. In Failsafe mode, the SPI0 BIOS socket on the carrier can be populated.

In either mode, BIOS Select and Mode Configuration Switch, Pin 1 is used to select whether to boot from SPI0 or SPI1.

Mode	Pin 1	Pin 2
Boot from SPI0 (default)	On	-
Boot from SPI1	Off	-
Set BIOS to PICMG mode (default, TBC)	-	On
Set BIOS to Failsafe BIOS mode	-	Off

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

6. BIOS Checkpoints, Beep Codes

This document section lists checkpoints and beep codes generated by AMI Aptio BIOS. The checkpoints defined in this document are inherent to the AMIBIOS generic core, and do not include any chipset or board-specific checkpoint definitions.

Checkpoints and Beep Codes Definition

A checkpoint is either a byte or word value output to I/O port 80h. The BIOS outputs checkpoints throughout the boot block and Power-On Self-Test (POST) to indicate the task the system is currently executing. Checkpoints are very useful for debugging problems that occur during the preboot process.

Beep codes are used by the BIOS to indicate a serious or fatal error. They are used when an error occurs before the system video has been initialized, and generated by the system board speaker.

Aptio Boot Flow

While performing the functions of the traditional BIOS, Aptio 5.x core follows the firmware model described by the Intel Platform Innovation Framework for EFI ("the Framework"). The Framework refers the following "boot phases", which may apply to various status code & checkpoint descriptions:

- Security (SEC) – initial low-level initialization
- Pre-EFI Initialization (PEI) – memory initialization[1]
- Driver Execution Environment (DXE) – main hardware initialization[2]
- Boot Device Selection (BDS) – system setup, pre-OS user interface & selecting a bootable device (CD/DVD, HDD, USB, Network, Shell, …)

Viewing BIOS Checkpoints

Viewing all checkpoints generated by the BIOS requires a checkpoint card, also referred to as a POST Card or POST Diagnostic Card. These are PCI add-in cards that show the value of I/O port 80h on a LED display.

Some computers display checkpoints in the bottom right corner of the screen during POST. This display method is limited, since it only displays checkpoints that occur after the video card has been activated.

Keep in mind that not all computers using AMI Aptio BIOS enable this feature. In most cases, a checkpoint card is the best tool for viewing AMI Aptio BIOS checkpoints.

[1]Analogous to "boot block" functionality of legacy BIOS
[2]Analogous to "POST" functionality in legacy BIOS

Aptio V Checkpoint and Beep Codes

Download the Aptio V Checkpoint and Beep Codes from the AMI website at: www.ami.com

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Viewing Checkpoints

Checkpoints generated by Aptio firmware can be viewed using a PCI checkpoint card, also referred to as a "POST Card" or "POST Diagnostic Card". These PCI add-in cards show the value of I/O port 80h on a LED display. Checkpoint cards are available through a variety of computer mail-order outlets.

Newer systems feature support for AMI Debug Rx, a USB connected alternative to the PCI POST Card. AMI Debug Rx is a low-cost debug tool built around the debug port feature common to today's USB 2.0 EHCI controllers. AMI Debug Rx is designed as replacement for the PCI POST Checkpoint Card as newer systems omit PCI expansion slots. Along with checkpoints, AMI Debug Rx has several features specifically designed for BIOS developers.

6.1 Status Code Ranges

Code Range	Description
0x01 – 0x0B	SEC execution
0x0C – 0x0F	SEC errors
0x10 – 0x2F	PEI execution up to and including memory detection
0x30 – 0x4F	PEI execution after memory detection
0x50 – 0x5F	PEI errors
0x60 – 0x8F	DXE execution up to BDS
0x90 – 0xCF	BDS execution
0xD0 – 0xDF	DXE errors
0xE0 – 0xE8	S3 Resume (PEI)
0xE9 – 0xEF	S3 Resume errors (PEI)
0xF0 – 0xF8	Recovery (PEI)
0xF9 – 0xFF	Recovery errors (PEI)

Note: Table above is subject to future updates.

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7. Mechanical and Thermal

7.1 Module Dimensions

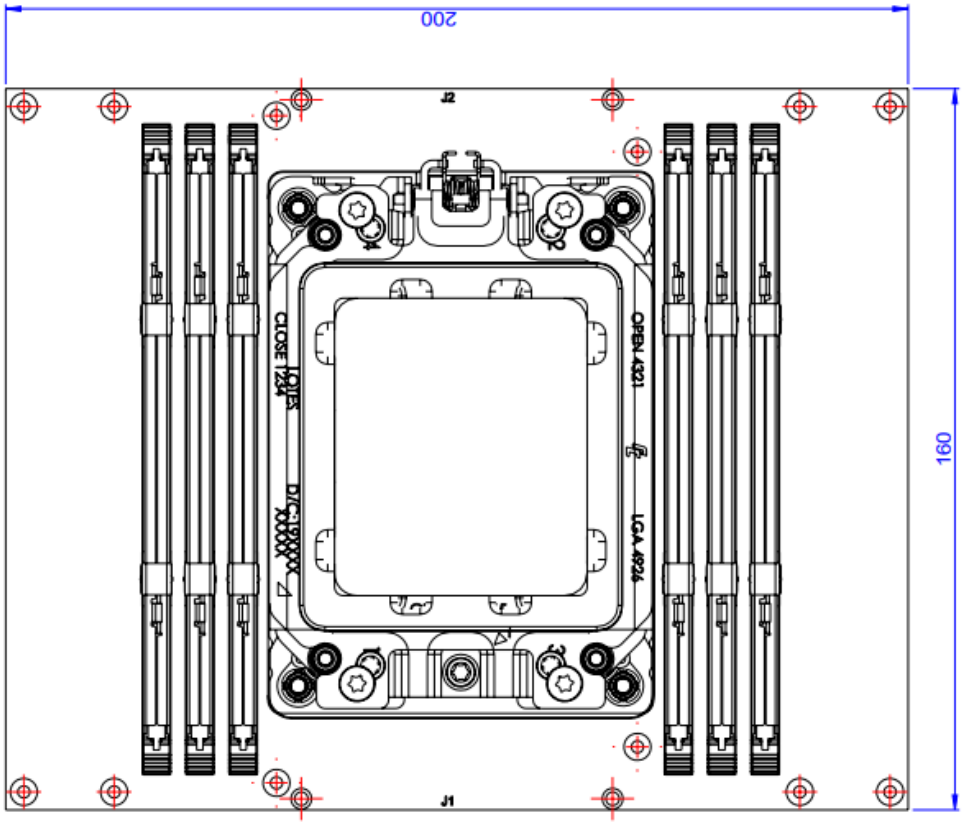


Figure 3 – Module dimensions (mm)

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.2 Thermal Solutions

7.2.1 Heatsink : THS-ALT-BL

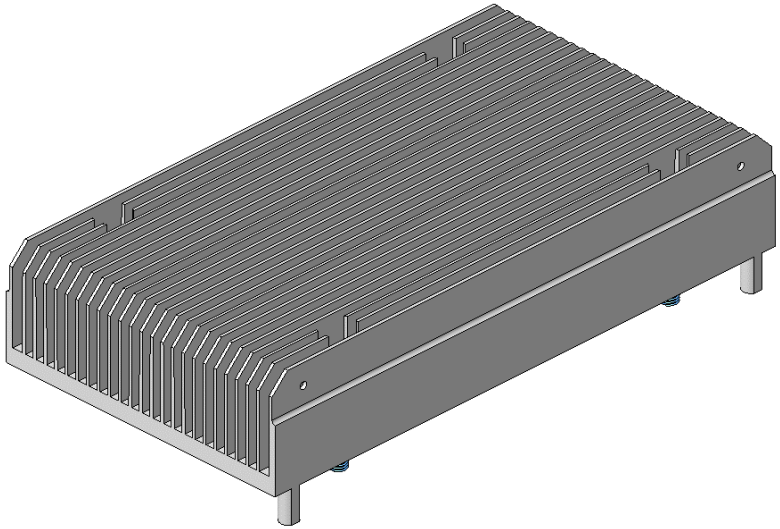


Figure 4 – Heatsink THS-ALT-BL

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.2.2 Low Profile Active Cooler: THSF-ALT-BL-S

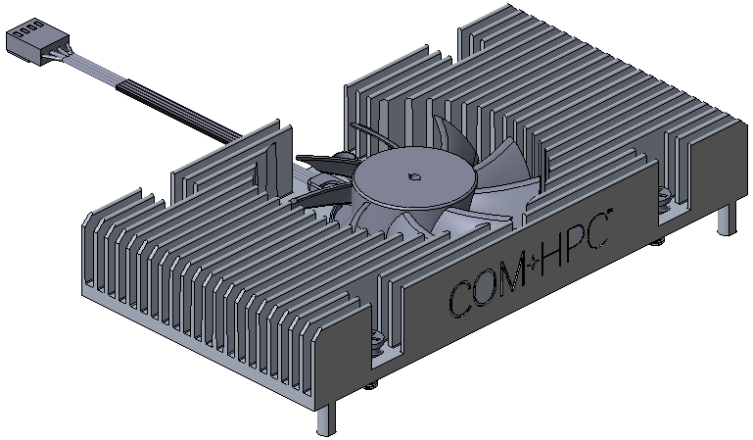


Figure 5 – THSF-ALT-BL-S

Copyright © 2025 ADLINK Technology, Inc.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.2.3 High Profile Passive Heatsink: THSH-ALT-VC

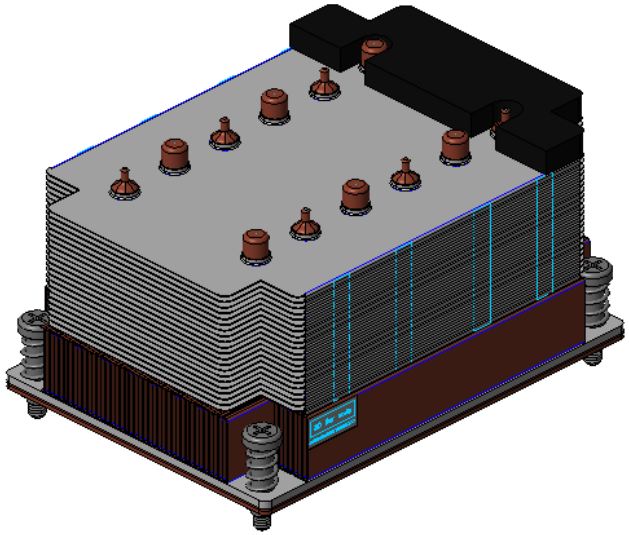


Figure 6 – High profile passive heatsink THSH-ALT-VC

Copyright © 2025 ADLINK Technology, Inc.
Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.2.4 Active Cooling: THSF-ALT-BL

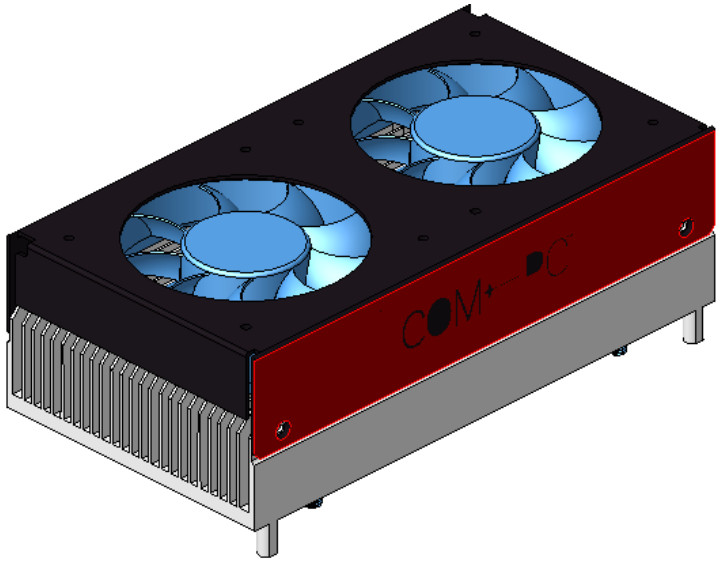


Figure 7 – Cooler THSF-ALT-BL

Copyright © 2025 ADLINK Technology, Inc.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000