

Updated EMU-200 SOP


1. Connect a network cable between the computer and the EMU-200 LAN2, then change the computer's IP address to **192.168.50.100**.

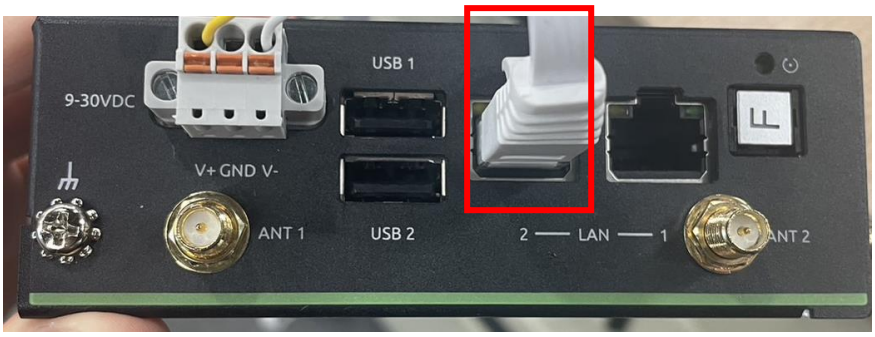

2. Open a browser and enter **192.168.50.2** to access the **EMU-200 Web Console**.
   (The default Web Console username/password: admin/adlink)

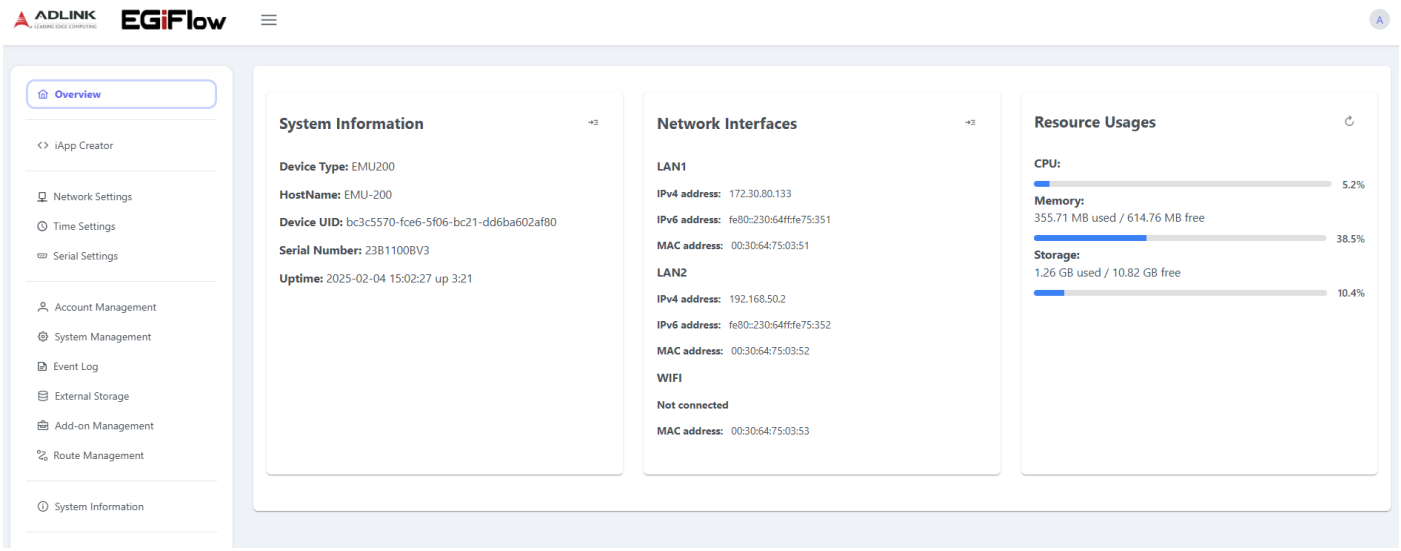


3. Go to **System Management** and click **Upgrade**.
   ※ **Important:** This update method requires the EMU-200 to be on **v24.12.1223 or higher** version.

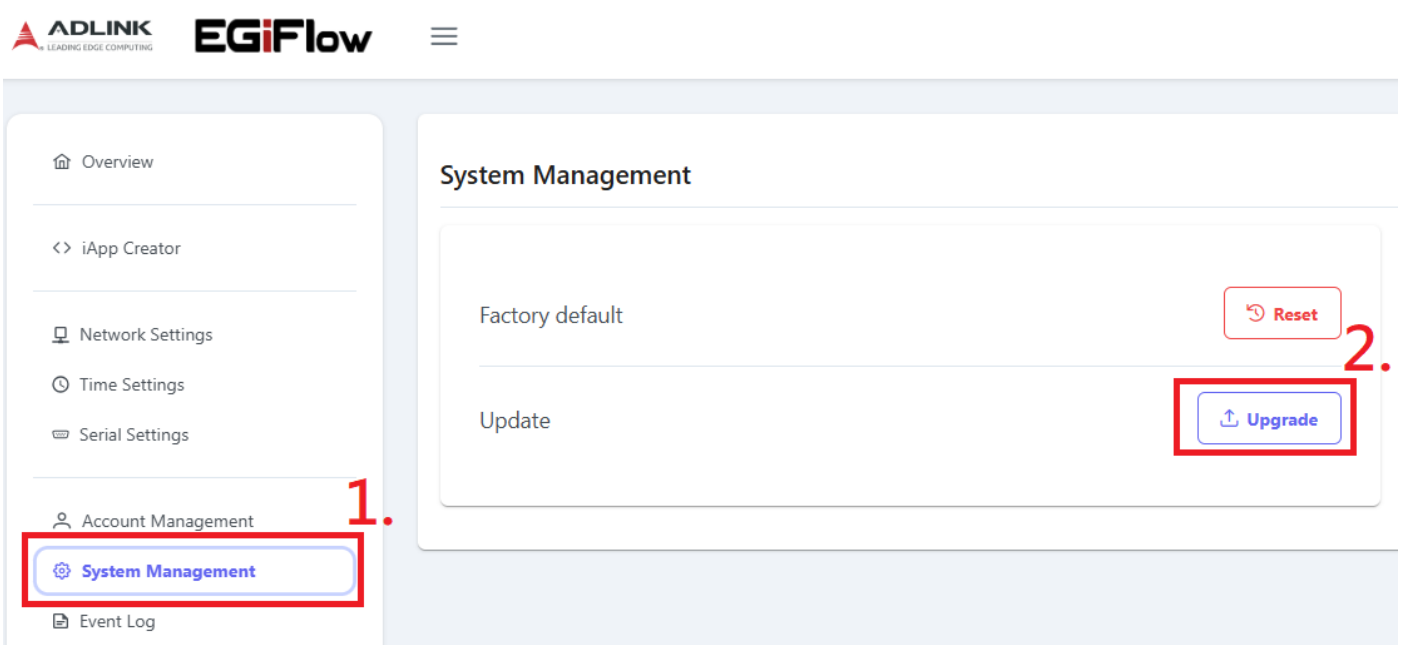



4. Click **Choose**, select the EMU-200-specific upgrade file (**EMU_v****.bin**), then click **Upgrade** to start the update.



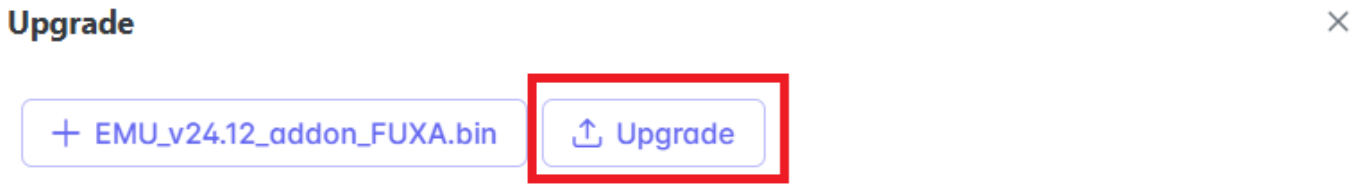

5. A progress bar will appear in the upgrade window, and the update will take about **20 minutes**. When the message "***Done. You can close this window***" appears, the update is complete.
   ※ **Do not power off the EMU-200 during the update, as this may corrupt system data and prevent the device from booting.**

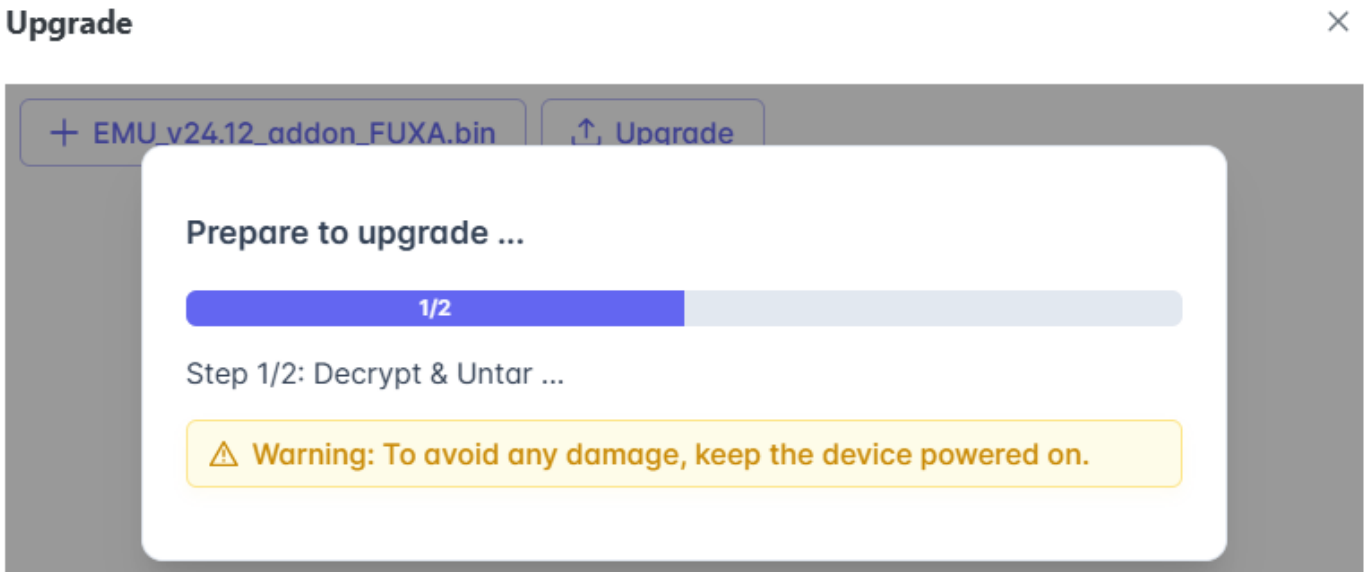

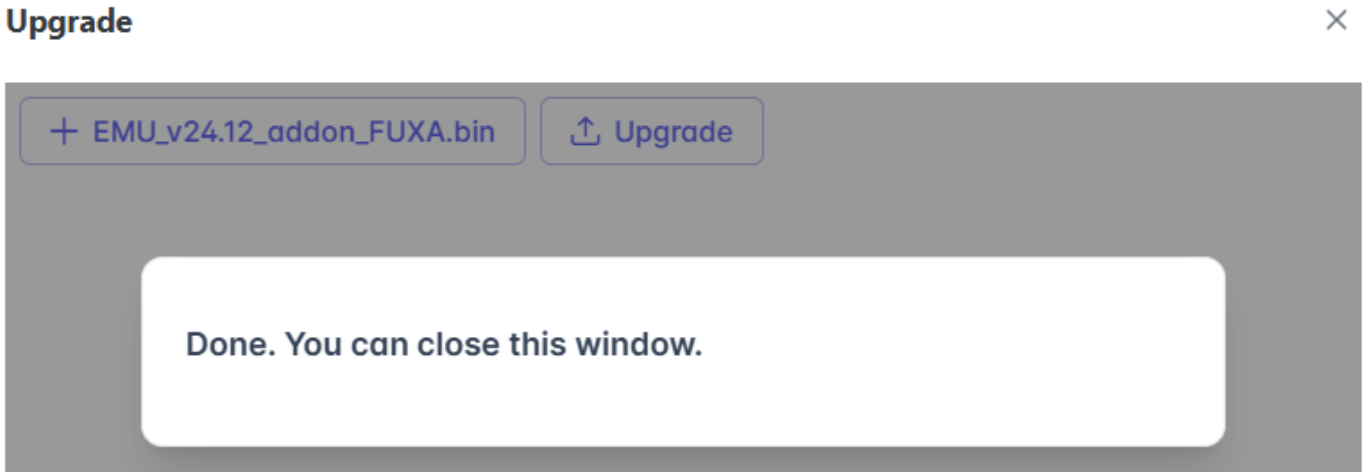

6. Go to **System Information** to verify if the version has been successfully updated.

