
ADLINK
LEADING EDGE COMPUTING

3U CompactPCI® Serial 2.5" SATA Storage Carrier Blade

cPCI-A3H10

Datasheet

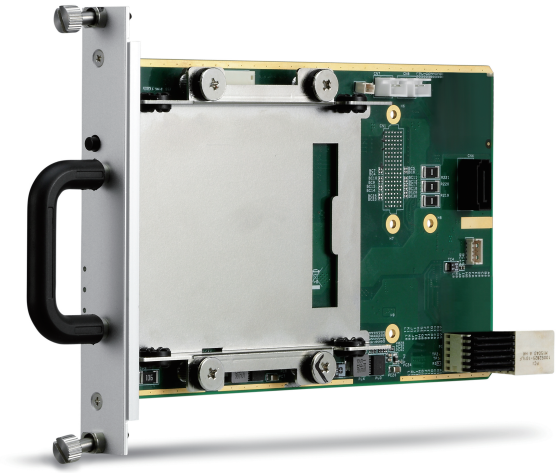

Features

- 3U 4HP CPCI-S.0 peripheral
- One 2.5" SATA 6Gb/s drive slot
- Status LEDs on faceplate: drive activity, hot-swap status, user-configurable
- Hot swap support
- Operating temperature: -40°C to 85°C with qualified component

Specifications

General	Storage	1x 2.5" SATA SSD 6Gb/s slot
	PICMG Standards	CompactPCI® Serial Rev 2.0
Front Panel Interfaces	LED	Three LEDs indicators for SATA SSD status
Backplane Interfaces	PCI Express	1x PCIe x4 Gen3 on P1
Electrical Specifications	Power Input	+12V
Mechanical & Environmental	Form Factor	3U 4HP 1-slot CompactPCI Serial blade 160mm x 100mm (LxW) Equipped with P1
	Weight	0.2g (without SSD)
	Operating Temp.	-40°C to +70°C with air cool
	Storage Temp.	-40°C to +85°C

Ordering Information

cPCI-A3H10	3U CompactPCI Serial storage blade with 1x 2.5" SATA storage carrier

www.adlinktech.com

intel partner Titanium IoT Solutions

All products and company names listed are trademarks or trade names of their respective companies. ©2022 ADLINK Technology, Inc.
All Rights Reserved. All pricing and specifications are subject to change without further notice.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000