
COM Express®

Express-IB

User's Manual

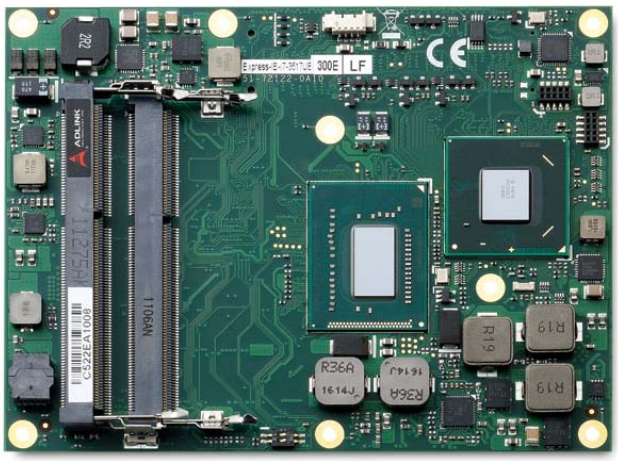

Manual Revision: 2.03

Revision Date: December 3, 2014

Part Number: 50-1J044-1030

ADLINK TECHNOLOGY INC.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Revision History

Revision	Description	Date	By
2.00	Initial release	2013-08-30	JC
2.01	Correct CPU support spec (Intel® Core™ i7-3615QE); correct GBE0_MDI0- pin description	2013-10-25	JC
2.02	Add Celeron® SKUs; update PCIe expansion specifications	2014-07-04	JC
2.03	Add BIOS beep codes; remove Industrial Temp. SKU	2014-12-03	JC

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Preface

Copyright 2013-14 ADLINK Technology, Inc.

This document contains proprietary information protected by copyright. All rights are reserved. No part of this manual may be reproduced by any mechanical, electronic, or other means in any form without prior written permission of the manufacturer.

Disclaimer

The information in this document is subject to change without prior notice in order to improve reliability, design, and function and does not represent a commitment on the part of the manufacturer. In no event will the manufacturer be liable for direct, indirect, special, incidental, or consequential damages arising out of the use or inability to use the product or documentation, even if advised of the possibility of such damages.

Environmental Responsibility

ADLINK is committed to fulfill its social responsibility to global environmental preservation through compliance with the European Union's Restriction of Hazardous Substances (RoHS) directive and Waste Electrical and Electronic Equipment (WEEE) directive. Environmental protection is a top priority for ADLINK. We have enforced measures to ensure that our products, manufacturing processes, components, and raw materials have as little impact on the environment as possible. When products are at their end of life, our customers are encouraged to dispose of them in accordance with the product disposal and/or recovery programs prescribed by their nation or company.

Trademarks

Product names mentioned herein are used for identification purposes only and may be trademarks and/or registered trademarks of their respective companies.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Table of Contents

Revision History **2**

Preface **3**

1. Introduction **7**

2. Specifications **8**

2.1. Core System 8

2.2. Expansion Busses 8

2.3. Video 8

2.4. Audio 9

2.5. LAN 9

2.6. Multi I/O and Storage 9

2.7. Serial I/O on Module 9

2.8. Super I/O (on Carrier using LPC -bus) 9

2.9. GPIO 9

2.10. Board Controller 9

2.11. TPM (Trusted Platform Module) 10

2.12. Fan Control 10

2.13. Debug 10

2.14. Power Specifications 10

2.15. Mechanical and Environmental 10

2.16. Specification Compliance 10

2.17. Functional Diagram 11

2.18. Mechanical Drawing 12

3. Pinouts and Signal Descriptions **13**

3.1. AB / CD Pin Definitions 13

3.2. Signal Description Terminology 16

3.3. AB Signal Descriptions 17

3.3.1. Audio Signals 17

3.3.2. Analog VGA 17

3.3.3. LVDS 17

3.3.4. Gigabit Ethernet 18

3.3.5. Serial ATA 19

3.3.6. PCI Express 20

3.3.7. Express Card 20

3.3.8. LPC bus 21

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

3.3.9. USB 21
3.3.10. SPI (BIOS only) 22
3.3.11. Miscellaneous 22
3.3.12. SMBus 22
3.3.13. I2C Bus 23
3.3.14. General Purpose I/O (GPIO) 23
3.3.15. Power And System Management 23
3.3.16. Power and Ground 24
3.4. CD Signal Descriptions 25
3.4.1. USB 3.0 extension 25
3.4.2. PCI Express x1 25
3.4.3. DDI Channels 26
3.4.4. DDI to DP/HDMI/SDVO Mapping 28
3.4.5. PCI Express Graphics x16 (PEG) 29
3.4.6. Module Type Definition 30
3.4.7. Power and Ground 30
4. Module Configuration 31
4.1. PCI Express Configuration Switch (SW1) 31
4.2. PCIe x16-to-two-x8 Adapter Card 31
5. Embedded Functions 32
5.1. Watchdog Timer 32
5.1.1. AIDI Demo Program - Watchdog Tab 32
5.2. GPIO 33
5.2.1. AIDI Demo Program - GPIO Tab 33
5.3. Hardware Monitoring 34
5.3.1. AIDI Demo Program - HW Monitor Tab 34
6. System Resources 35
6.1. System Memory Map 35
6.2. Direct Memory Access Channels 35
6.3. I/O Map 36
6.4. Interrupt Request (IRQ) Lines 38
6.5. PCI Configuration Space Map 39
6.6. PCI Interrupt Routing Map 40
6.7. SMBus Address Table 40
7. BIOS Setup 41
7.1. Starting the BIOS 41

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.1.1. Setup Menu 42
7.1.2. Navigation 43
7.2. Main Setup 46
7.3. Advanced Setup 47
7.3.1. ACPI Settings 47
7.3.2. Trusted Computing 48
7.3.3. CPU Configuration 49
7.3.4. SATA Configuration 50
7.3.5. Intel TXT(LT) Configuration 50
7.3.6. PCH-FW Configuration 51
7.3.7. Intel Anti-Theft Technology Configuration 52
7.3.8. AMT Configuration 53
7.3.9. USB Configuration 54
7.3.10. ADT 7490 H/W Monitor 55
7.3.11. W8362DHG Super IO Configuration 55
7.3.12. Serial Port Console Redirection 56
7.3.13. CPU PPM Configuration 57
7.4. Chipset Setup 58
7.4.1. PCH-IO Configuration 58
7.4.2. System Agent (SA) Configuration 61
7.5. Boot Setup 67
7.6. Security Setup 68
7.7. Save & Exit Menu 69
8. BIOS Checkpoints, Beep Codes 70
8.1. Status Code Ranges 71
8.2. Standard Status Codes 71
8.2.1. SEC Status Codes 71
8.2.2. SEC Beep Codes 72
8.2.3. PEI Status Codes 72
8.2.4. PEI Beep Codes 74
8.2.5. DXE Status Codes 74
8.2.6. DXE Beep Codes 76
8.2.7. ACPI/ASL Checkpoint 77
8.3. OEM-Reserved Checkpoint Ranges 77
Safety Instructions 78
Getting Service 79

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1. Introduction

The Express-IB is a COM Express® COM.0 R2.1 Type 6 module supporting the 64-bit 3rd Generation Intel® Core™ i7/i5/3 and Celeron® processor with CPU, memory controller, and graphics processor on the same chip. Based on the latest Mobile Intel® QM77 Express chipset, the Express-IB is specifically designed for customers who need high-level processing and graphics performance in a long product life solution.

The Express-IB features the Intel® Core™ i7/i5/i3 processor supporting Intel® Hyper-Threading Technology (up to 4 cores, 8 threads) and DDR3 dual-channel memory at 1066/1333/1600 MHz to provide excellent overall performance. Intel® Flexible Display Interface and Direct Media Interface provide high speed connectivity to the Intel® QM77 Express chipset.

Integrated HD Graphics 4000 includes features such as OpenGL 3.1, DirectX11, Intel® Clear Video HD Technology, Advanced Scheduler 2.0, 1.0, XPDM support, and DirectX Video Acceleration (DXVA) support for full AVC/VC1/MPEG2 hardware decode. Graphics outputs include VGA, LVDS and three DDI ports supporting HDMI / DVI / DisplayPort or SDVO. The Express-IB is specifically designed for customers with high-performance processing graphics requirements who want to outsource the custom core logic of their systems for reduced development time.

The Express-IB has dual stacked SODIMM sockets for up to 16 GB DDR3 memory. The Intel® Mobile QM77 Express chipset integrates VGA and dual-channel 18/24-bit LVDS display output. In addition to the onboard integrated graphics, a multiplexed PCI Express x16 Graphics bus is available for discrete graphics expansion or general purpose x8 or x4 PCI Express connectivity.

The Express-IB features a single onboard Gigabit Ethernet port, four USB 3.0 ports and four USB 2.0 ports, two SATA 6 Gb/s ports and two SATA 3 Gb/s ports. Support is provided for SMBus and I2C. The module is equipped with SPI AMI EFI BIOS with CMOS backup, supporting embedded features such as remote console, CMOS backup, hardware monitor, and watchdog timer.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2. Specifications

2.1. Core System

- CPU: 3rd Generation Intel® Core™, Celeron® Processor, 2/4-core mobile processor with Integrated Graphics, BGA 1023 type
  - Intel® Core™ i7-3615QE quad-core 2.3 GHz (3.3/3.1 GHz Turbo), 6MB L3 cache, 45W
  - Intel® Core™ i7-3612QE quad-core 2.1 GHz (3.1/2.8 GHz Turbo), 6MB L3 cache, 35W
  - Intel® Core™ i7-3555LE dual-core 2.5 GHz (3.2/3.1 GHz Turbo), 4MB L3 cache, 25W
  - Intel® Core™ i7-3517UE dual-core 1.7 GHz (2.8/2.6 GHz Turbo), 4MB L3 cache, 17W
  - Intel® Core™ i5-3610ME dual-core 2.7 GHz (3.3/3.1 GHz Turbo), 3MB L3 cache, 35W
  - Intel® Core™ i3-3120ME dual-core 2.4 GHz (no Turbo), 3MB L3 cache, 35W
  - Intel® Core™ i3-3127UE dual-core 1.6 GHz (no Turbo), 3MB L3 cache, 17W
  - Intel® Celeron® 1020E dual-core 2.2 GHz (no Turbo) 35W
  - Intel® Celeron® 1047UE dual-core 1.4 GHz (no Turbo) 17W
  - Intel® Celeron® 927UE dual-core 1.5 GHz (no Turbo) 17W
- Cache: 2MB to 16MB LLC cache depending on CPU type
- Memory: dual stacked SO-DIMM socket memory on top
  Dual channel DDR3 Memory DDR3 data transfer rates of 1066 MT/s, 1333 MT/s and 1600 MT/s
- Chipset: Mobile Intel® QM77 Express Chipset
- BIOS: AMI EFI with CMOS backup in 16 Mbit SPI BIOS
- Hardware Monitor: Supply voltages and CPU temperature
- Fan Control: through AB conenctor or mini connector on module routed from the same PWM source (ADMT controller)
- Debug Interface: XDP SFF-26 extension for ICE debug
- Management: Intel® AMT 8.0 (availability dependent on processor)

2.2. Expansion Busses

- PCI Express x16 Gen3/2* supporting up to 8GT/Sec transactions
  Configurable as 1 x16 , 2 x8 or 1 x8-lane and 2 x4-lane (routed to CB connector PCIe x16)
  *Core™ i7/i5 support Gen3, Core™ i3/Celeron support Gen2
- 6x PCIe x1 Gen2 (port 0~5) on AB connector
  1x PCIe x1 Gen2 (port 6) on CD connector
- LPC bus, SPI bus (BIOS only)
- SMBus (system) , I^2C (user)

2.3. Video

- Integrated in processor: Intel® HD Graphics 4000 or HD Graphics (dependent on processor)
- Supports: DirectX 11, OpenGL 3.1, OpenCL 1.1
- Features (dependent on processor):
  - Intel Clear Video HD Technology
  - Advanced Scheduler 2.0, 1.0, XPDM support
  - DirectX Video Acceleration (DXVA) support for full AVC/VC1/MPEG2 hardware decode
- Multi-display Support: 3 independent displays

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

- Display Types
  - VGA Interface support with 300 MHz DAC Analog monitor support up to QXGA (2048 x 1536)
  - LVDS Interface Dual channel 18/24-bit LVDS
  - Three Digital Display Ports
    - DDI0 supporting HDMI / DisplayPort / SDVO
    - DDI1 supporting HDMI / DisplayPort
    - DDI2 supporting HDMI / DisplayPort

2.4. Audio

- Integrated: Intel® HD Audio integrated in PCH QM77
- Audio Codec: Realtek ALC888/886 on Express-BASE6

2.5. LAN

- Integrated: LAN MAC integrated in PCH QM77
- Intel PHY: 82579 Gb Ethernet
- Interface: 10/100/1000 GbE connection

2.6. Multi I/O and Storage

- Integrated in PCH QM77
- USB ports: 4 ports USB 3.0 (USB0,1,2,3) and 4 ports USB 2.0 (USB4,5,6,7)
- SATA ports: two ports SATA 6Gb/s (SATA0, SATA1) two ports SATA 3 Gb/s (SATA2, SATA3)

2.7. Serial I/O on Module

- Not implemeted

2.8. Super I/O (on Carrier using LPC -bus)

- Chipset: Winbond W83627HG-AW AND W83627DHG-P
  Without keyboard A20 line
- Parallel Port: LPT1
- Serial Ports: COM1 / COM2 (with console redirection)

2.9. GPIO

- Chipset: NXP PCA9535
- Description: 16-bit I2C-bus and SMBus, low power I/O port with interrupt
- GPO: 4 ports
- GPI: 4 ports with interrupt

2.10. Board Controller

- Type: Atmega168
- Functions:
  - AT mode control
  - I^2C supports 100/200/400 speed selectable in BIOS
  - Vdde control
  - Backlight Enable
  - Brightness through DDC to PWM on Carrier
  - Watchdog

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2.11. TPM (Trusted Platform Module)

- Chipset: Infineon SLB9635TT1.2
- Type: TPM 1.2

2.12. Fan Control

- Control Source: Temperature Sensor
- Location
  - On AB connector (B101/102): PWM and TACH 12V based on carrier
  - 4-pin Mini connector on module: PWM and TACH 5V based on module
- Connection: route single source to dual locations

2.13. Debug

- JTAG: SFF connector for XDP to CPU
- LPC header: for mounting POST CODE assembly

2.14. Power Specifications

- Power Modes: AT and ATX mode (AT mode start controlled by ADMT)
- Standard Voltage Input: ATX = 12V±5% / 5Vsb or AT = 12V±5%
- Wide Voltage Input: ATX = 8.5~19V / 5Vsb or AT = 8.5 ~19V
- Power Management: ACPI 3.0 compliant, Smart battery support.
- Power States: supports C1-C6, S0, S1, S4, S3, S5 (Wake on USB S3/S4, WOL S3/S4/S5)

2.15. Mechanical and Environmental


- Standard Operating Temperature: 0 to 60°C (Wide Voltage Input)

2.16. Specification Compliance

- PICMG COM.0: Rev 2.1 Type 6, basic size 125 x 95


LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2.17. Functional Diagram

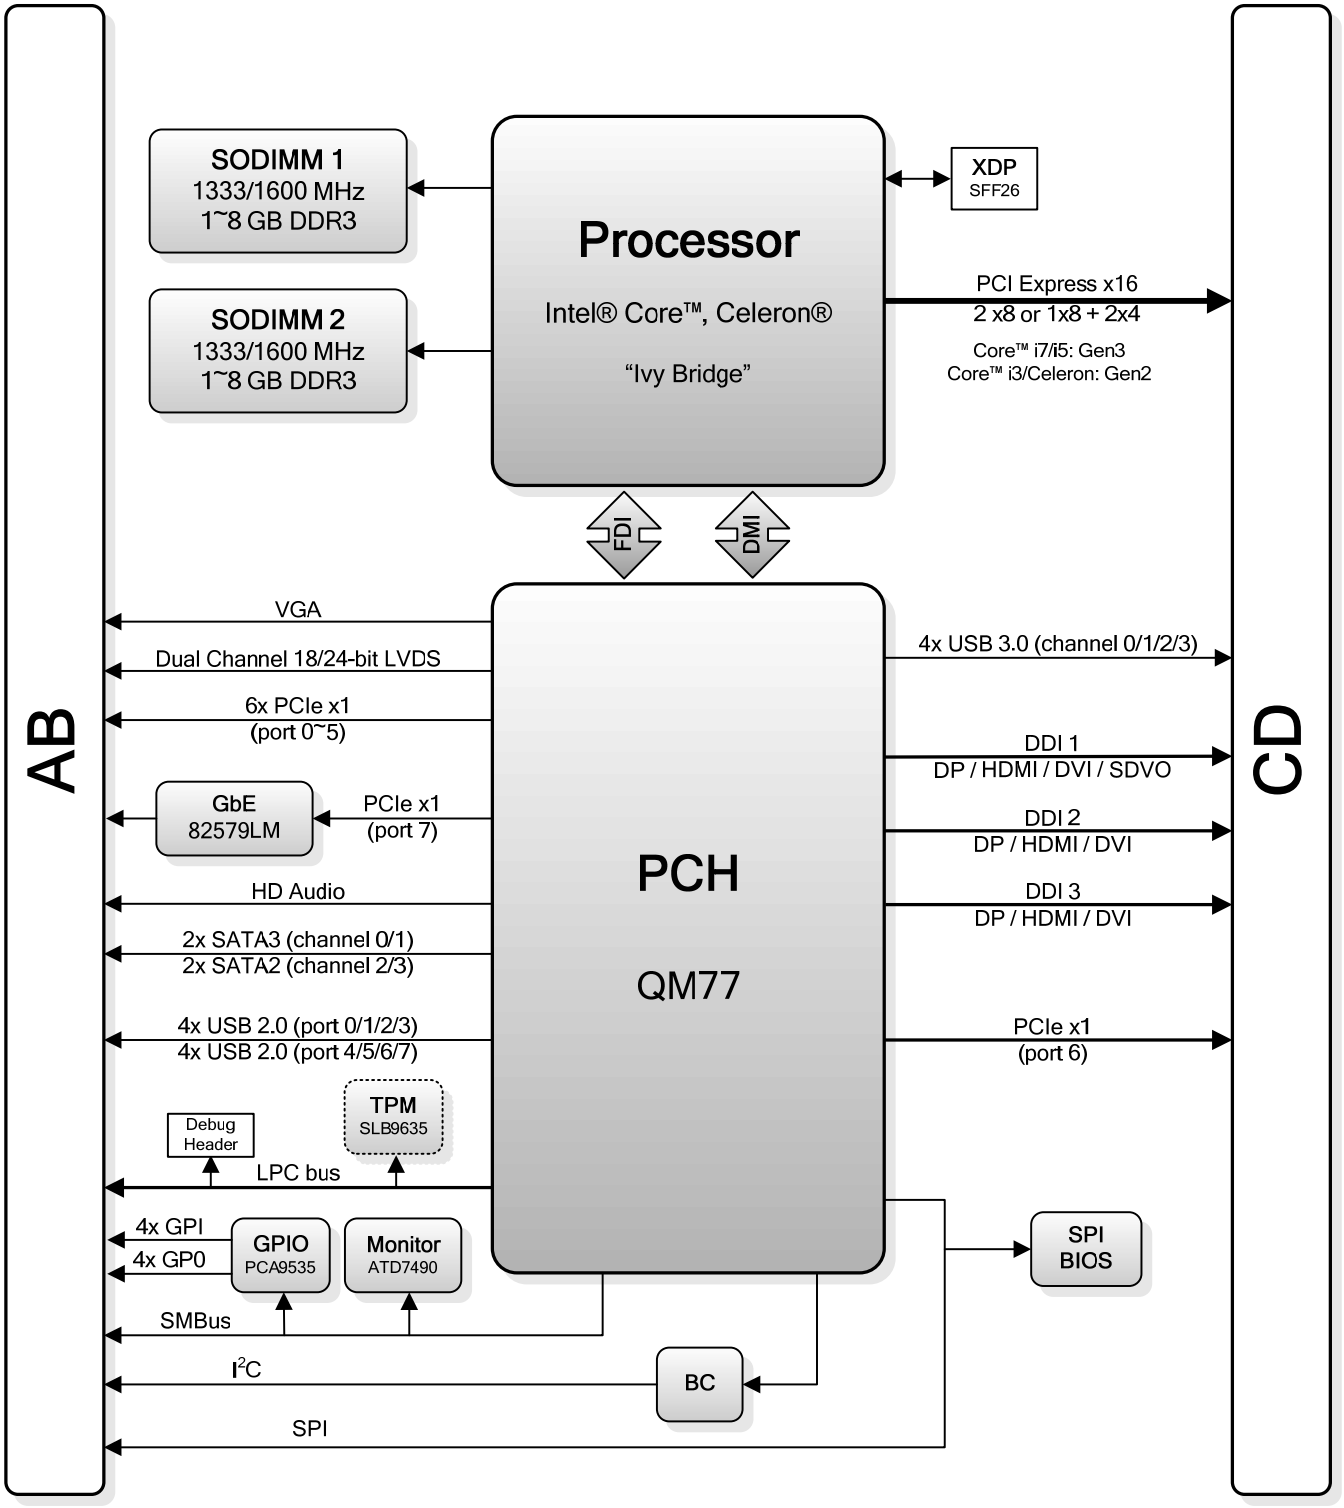

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2.18. Mechanical Drawing

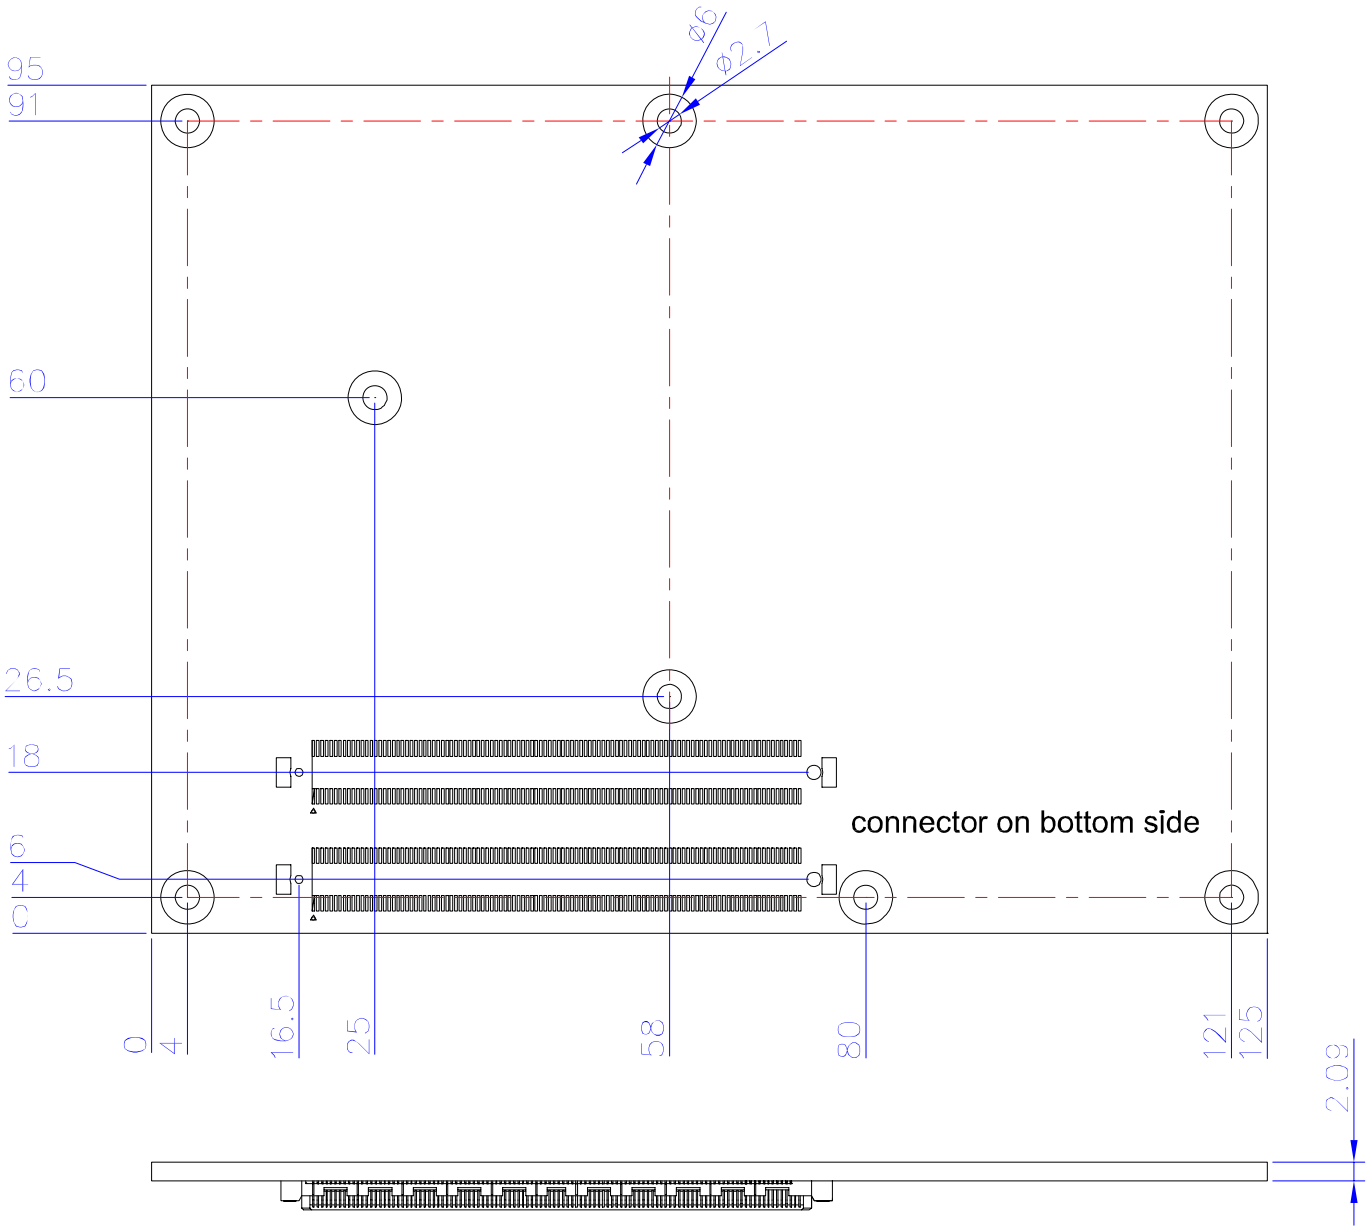

All ∅ tolerances ±0.05
Other tolerances ±0.2

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

3. Pinouts and Signal Descriptions

The following information is a summary of the most important information regarding pinout and signal description in the official PICMG COM.0 Rev 2.0 (soon 2.1)

The pinout is noted here to emphazise issues that have not been followed in the past. The following might have small inacuaracies so in case of doubt the offical design guide of PICMG should be consulted.

3.1. AB / CD Pin Definitions

The Express-IB is a Type 6 module supporting USB3.0 and DDI channels on the CD connector

All pin in the specification are described also those not supported on the Express-IB. Those not supported on the Express-IB module are crossed out

	Row A		Row B		Row C		Row D
Pin	**Name**	**Pin**	**Name**	**Pin**	**Name**	**Pin**	**Name**
A1	GND (FIXED)	**B1**	GND (FIXED)	**C1**	GND FIXED)	**D1**	GND FIXED)
A2	GBE0_MDI3-	**B2**	GBE0_ACT#	**C2**	GND	**D2**	GND
A3	GBE0_MDI3+	**B3**	LPC_FRAME#	**C3**	USB_SSRX0-	**D3**	USB_SSTX0-
A4	GBE0_LINK100#	**B4**	LPC_AD0	**C4**	USB_SSRX0+	**D4**	USB_SSTX0+
A5	GBE0_LINK1000#	**B5**	LPC_AD1	**C5**	GND	**D5**	GND
A6	GBE0_MDI2-	**B6**	LPC_AD2	**C6**	USB_SSRX1-	**D6**	USB_SSTX1-
A7	GBE0_MDI2+	**B7**	LPC_AD3	**C7**	USB_SSRX1+	**D7**	USB_SSTX1+
A8	GBE0_LINK#	**B8**	LPC_DRQ0#	**C8**	GND	**D8**	GND
A9	GBE0_MDI1-	**B9**	LPC_DRQ1#	**C9**	USB_SSRX2-	**D9**	USB_SSTX2-
A10	GBE0_MDI1+	**B10**	LPC_CLK	**C10**	USB_SSRX2+	**D10**	USB_SSTX2+
A11	GND (FIXED)	**B11**	GND (FIXED)	**C11**	GND (FIXED)	**D11**	GND (FIXED)
A12	GBE0_MDI0-	**B12**	PWRBTN#	**C12**	USB_SSRX3-	**D12**	USB_SSTX3-
A13	GBE0_MDI0+	**B13**	SMB_CK	**C13**	USB_SSRX3+	**D13**	USB_SSTX3+
A14	GBE0_CTREF	**B14**	SMB_DAT	**C14**	GND	**D14**	GND
A15	SUS_S3#	**B15**	SMB_ALERT#	**C15**	DDI1_PAIR6+	**D15**	DDI1_CTRLCLK_AUX+
A16	SATA0_TX+	**B16**	SATA1_TX+	**C16**	DDI1_PAIR6-	**D16**	DDI1_CTRLDATA_AUX-
A17	SATA0_TX-	**B17**	SATA1_TX-	**C17**	RSVD	**D17**	RSVD
A18	SUS_S4#	**B18**	SUS_STAT#	**C18**	RSVD	**D18**	RSVD
A19	SATA0_RX+	**B19**	SATA1_RX+	**C19**	PCIE_RX6+	**D19**	PCIE_TX6+
A20	SATA0_RX-	**B20**	SATA1_RX-	**C20**	PCIE_RX6-	**D20**	PCIE_TX6-
A21	GND (FIXED)	**B21**	GND (FIXED)	**C21**	GND (FIXED)	**D21**	GND (FIXED)
A22	SATA2_TX+	**B22**	SATA3_TX+	**C22**	~~PCIE_RX7+~~	**D22**	~~PCIE_TX7+~~
A23	SATA2_TX-	**B23**	SATA3_TX-	**C23**	~~PCIE_RX7-~~	**D23**	~~PCIE_TX7-~~
A24	SUS_S5#	**B24**	PWR_OK	**C24**	DDI1_HPD	**D24**	RSVD
A25	SATA2_RX+	**B25**	SATA3_RX+	**C25**	DDI1_PAIR4+	**D25**	RSVD
A26	SATA2_RX-	**B26**	SATA3_RX-	**C26**	DDI1_PAIR4-	**D26**	DDI1_PAIR0+
A27	BATLOW#	**B27**	WDT	**C27**	RSVD	**D27**	DDI1_PAIR0-
A28	(S)ATA_ACT#	**B28**	AC/HDA_SDIN2	**C28**	RSVD	**D28**	RSVD
A29	AC/HDA_SYNC	**B29**	AC/HDA_SDIN1	**C29**	DDI1_PAIR5+	**D29**	DDI1_PAIR1+
A30	AC/HDA_RST#	**B30**	AC/HDA_SDIN0	**C30**	DDI1_PAIR5-	**D30**	DDI1_PAIR1-
A31	GND (FIXED)	**B31**	GND (FIXED)	**C31**	GND (FIXED)	**D31**	GND (FIXED)
A32	AC/HDA_BITCLK	**B32**	SPKR	**C32**	DDI2_CTRLCLK_AUX+	**D32**	DDI1_PAIR2+
A33	AC/HDA_SDOUT	**B33**	I2C_CK	**C33**	DDI2_CTRLDATA_AUX-	**D33**	DDI1_PAIR2-
A34	BIOS_DIS0#	**B34**	I2C_DAT	**C34**	DDI2_DDC_AUX_SEL	**D34**	DDI1_DDC_AUX_SEL
A35	THRMTRIP#	**B35**	THRM#	**C35**	RSVD	**D35**	RSVD

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Row A		Row B		Row C		Row D	
Pin	Name	Pin	Name	Pin	Name	Pin	Name
A36	USB6-	B36	USB7-	C36	DDI3_CTRLCLK_AUX+	D36	DDI1_PAIR3+
A37	USB6+	B37	USB7+	C37	DDI3_CTRLDATA_AUX-	D37	DDI1_PAIR3-
A38	USB_6_7_OC#	B38	USB_4_5_OC#	C38	DDI3_DDC_AUX_SEL	D38	RSVD
A39	USB4-	B39	USB5-	C39	DDI3_PAIR0+	D39	DDI2_PAIR0+
A40	USB4+	B40	USB5+	C40	DDI3_PAIR0-	D40	DDI2_PAIR0-
A41	GND (FIXED)	B41	GND (FIXED)	C41	GND (FIXED)	D41	GND (FIXED)
A42	USB2-	B42	USB3-	C42	DDI3_PAIR1+	D42	DDI2_PAIR1+
A43	USB2+	B43	USB3+	C43	DDI3_PAIR1-	D43	DDI2_PAIR1-
A44	USB_2_3_OC#	B44	USB_0_1_OC#	C44	DDI3_HPD	D44	DDI2_HPD
A45	USB0-	B45	USB1-	C45	RSVD	D45	RSVD
A46	USB0+	B46	USB1+	C46	DDI3_PAIR2+	D46	DDI2_PAIR2+
A47	VCC_RTC	B47	EXCD1_PERST#	C47	DDI3_PAIR2-	D47	DDI2_PAIR2-
A48	EXCD0_PERST#	B48	EXCD1_CPPE#	C48	RSVD	D48	RSVD
A49	EXCD0_CPPE#	B49	SYS_RESET#	C49	DDI3_PAIR3+	D49	DDI2_PAIR3+
A50	LPC_SERIRQ	B50	CB_RESET#	C50	DDI3_PAIR3-	D50	DDI2_PAIR3-
A51	GND (FIXED)	B51	GND (FIXED)	C51	GND (FIXED)	D51	GND (FIXED)
A52	PCIE_TX5+	B52	PCIE_RX5+	C52	PEG_RX0+	D52	PEG_TX0+
A53	PCIE_TX5-	B53	PCIE_RX5-	C53	PEG_RX0-	D53	PEG_TX0-
A54	GPI0	B54	GPO1	C54	TYPE0#	D54	PEG_LANE_RV#
A55	PCIE_TX4+	B55	PCIE_RX4+	C55	PEG_RX1+	D55	PEG_TX1+
A56	PCIE_TX4-	B56	PCIE_RX4-	C56	PEG_RX1-	D56	PEG_TX1-
A57	GND	B57	GPO2	C57	TYPE1#	D57	TYPE2#
A58	PCIE_TX3+	B58	PCIE_RX3+	C58	PEG_RX2+	D58	PEG_TX2+
A59	PCIE_TX3-	B59	PCIE_RX3-	C59	PEG_RX2-	D59	PEG_TX2-
A60	GND (FIXED)	B60	GND (FIXED)	C60	GND (FIXED)	D60	GND (FIXED)
A61	PCIE_TX2+	B61	PCIE_RX2+	C61	PEG_RX3+	D61	PEG_TX3+
A62	PCIE_TX2-	B62	PCIE_RX2-	C62	PEG_RX3-	D62	PEG_TX3-
A63	GPI1	B63	GPO3	C63	RSVD	D63	RSVD
A64	PCIE_TX1+	B64	PCIE_RX1+	C64	RSVD	D64	RSVD
A65	PCIE_TX1-	B65	PCIE_RX1-	C65	PEG_RX4+	D65	PEG_TX4+
A66	GND	B66	WAKE0#	C66	PEG_RX4-	D66	PEG_TX4-
A67	GPI2	B67	WAKE1#	C67	RSVD	D67	GND
A68	PCIE_TX0+	B68	PCIE_RX0+	C68	PEG_RX5+	D68	PEG_TX5+
A69	PCIE_TX0-	B69	PCIE_RX0-	C69	PEG_RX5-	D69	PEG_TX5-
A70	GND (FIXED)	B70	GND (FIXED)	C70	GND (FIXED)	D70	GND (FIXED)
A71	LVDS_A0+	B71	LVDS_B0+	C71	PEG_RX6+	D71	PEG_TX6+
A72	LVDS_A0-	B72	LVDS_B0-	C72	PEG_RX6-	D72	PEG_TX6-
A73	LVDS_A1+	B73	LVDS_B1+	C73	GND	D73	GND
A74	LVDS_A1-	B74	LVDS_B1-	C74	PEG_RX7+	D74	PEG_TX7+
A75	LVDS_A2+	B75	LVDS_B2+	C75	PEG_RX7-	D75	PEG_TX7-
A76	LVDS_A2-	B76	LVDS_B2-	C76	GND	D76	GND
A77	LVDS_VDD_EN	B77	LVDS_B3+	C77	RSVD	D77	RSVD
A78	LVDS_A3+	B78	LVDS_B3-	C78	PEG_RX8+	D78	PEG_TX8+
A79	LVDS_A3-	B79	LVDS_BKLT_EN	C79	PEG_RX8-	D79	PEG_TX8-
A80	GND (FIXED)	B80	GND (FIXED)	C80	GND (FIXED)	D80	GND (FIXED)

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Row A		Row B		Row C		Row D	
Pin	**Name**	**Pin**	**Name**	**Pin**	**Name**	**Pin**	**Name**
A81	LVDS_A_CK+	**B81**	LVDS_B_CK+	**C81**	PEG_RX9+	**D81**	PEG_TX9+
A82	LVDS_A_CK-	**B82**	LVDS_B_CK-	**C82**	PEG_RX9-	**D82**	PEG_TX9-
A83	LVDS_I2C_CK	**B83**	LVDS_BKLT_CTRL	**C83**	TPM_PP	**D83**	RSVD
A84	LVDS_I2C_DAT	**B84**	VCC_5V_SBY	**C84**	GND	**D84**	GND
A85	GPI3	**B85**	VCC_5V_SBY	**C85**	PEG_RX10+	**D85**	PEG_TX10+
A86	RSVD	**B86**	VCC_5V_SBY	**C86**	PEG_RX10-	**D86**	PEG_TX10-
A87	RSVD	**B87**	VCC_5V_SBY	**C87**	GND	**D87**	GND
A88	PCIE0_CK_REF+	**B88**	BIOS_DIS1#	**C88**	PEG_RX11+	**D88**	PEG_TX11+
A89	PCIE0_CK_REF-	**B89**	VGA_RED	**C89**	PEG_RX11-	**D89**	PEG_TX11-
A90	GND (FIXED)	**B90**	GND (FIXED)	**C90**	GND (FIXED)	**D90**	GND (FIXED)
A91	SPI_POWER	**B91**	VGA_GRN	**C91**	PEG_RX12+	**D91**	PEG_TX12+
A92	SPI_MISO	**B92**	VGA_BLU	**C92**	PEG_RX12-	**D92**	PEG_TX12-
A93	GPO0	**B93**	VGA_HSYNC	**C93**	GND	**D93**	GND
A94	SPI_CLK	**B94**	VGA_VSYNC	**C94**	PEG_RX13+	**D94**	PEG_TX13+
A95	SPI_MOSI	**B95**	VGA_I2C_CK	**C95**	PEG_RX13-	**D95**	PEG_TX13-
A96	TPM_PP	**B96**	VGA_I2C_DAT	**C96**	GND	**D96**	GND
A97	TYPE10#	**B97**	SPI_CS#	**C97**	RSVD	**D97**	RSVD
A98	~~SER0_TX~~	**B98**	RSVD	**C98**	PEG_RX14+	**D98**	PEG_TX14+
A99	~~SER0_RX~~	**B99**	RSVD	**C99**	PEG_RX14-	**D99**	PEG_TX14-
A100	GND (FIXED)	**B100**	GND (FIXED)	**C100**	GND (FIXED)	**D100**	GND (FIXED)
A101	~~SER1_TX~~	**B101**	FAN_PWMOUT	**C101**	PEG_RX15+	**D101**	PEG_TX15+
A102	~~SER1_RX~~	**B102**	FAN_TACHIN	**C102**	PEG_RX15-	**D102**	PEG_TX15-
A103	LID#	**B103**	SLEEP#	**C103**	GND	**D103**	GND
A104	VCC_12V	**B104**	VCC_12V	**C104**	VCC_12V	**D104**	VCC_12V
A105	VCC_12V	**B105**	VCC_12V	**C105**	VCC_12V	**D105**	VCC_12V
A106	VCC_12V	**B106**	VCC_12V	**C106**	VCC_12V	**D106**	VCC_12V
A107	VCC_12V	**B107**	VCC_12V	**C107**	VCC_12V	**D107**	VCC_12V
A108	VCC_12V	**B108**	VCC_12V	**C108**	VCC_12V	**D108**	VCC_12V
A109	VCC_12V	**B109**	VCC_12V	**C109**	VCC_12V	**D109**	VCC_12V
A110	GND (FIXED)	**B110**	GND (FIXED)	**C110**	GND (FIXED)	**D110**	GND (FIXED)

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

3.2. Signal Description Terminology

The following terms are used in the COM Express AB/CD Signal Descriptions below.

I	Input to the Module
O	Output from the Module
I/O	Bi-directional input / output signal
OD	Open drain output
I 3.3V	Input 3.3V tolerant
I 5V	Input 5V tolerant
O 3.3V	Output 3.3V signal level
O 5V	Output 5V signal level
I/O 3.3V	Bi-directional signal 3.3V tolerant
I/O 5V	Bi-directional signal 5V tolerant
I/O 3.3Vsb	Input 3.3V tolerant active in standby state
P	Power Input/Output
REF	Reference voltage output that may be sourced from a module power plane.
PDS	Pull-down strap. This is an output pin on the module that is either tied to GND or not connected. The signal is used to indicate the PICMG module type to the Carrier Board.
PU	ADLINK implemented pull-up resistor on module
PD	ADLINK implemented pull-down resistor on module

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

3.3. AB Signal Descriptions

3.3.1. Audio Signals

Signal	Pin #	Description	I/O	PU/PD	Comment
AC_RST# / HDA_RST#	A30	Reset output to CODEC, active low.	O 3.3VSB		
AC_SYNC / HDA_SYNC	A29	Sample-synchronization signal to the CODEC(s).	O 3.3V		
AC_BITCLK / HDA_BITCLK	A32	Serial data clock generated by the external CODEC(s).	I/O 3.3V		
AC _SDOUT / HDA_SDOUT	A33	Serial TDM data output to the CODEC.	O 3.3V		
AC _SDIN[2:0] HDA_SDIN[2:0]	B28 B30	Serial TDM data inputs from up to 3 CODECs.	I/O 3.3VSB		

3.3.2. Analog VGA

Signal	Pin #	Description	I/O	PU/PD	Comment
VGA_RED	B89	Red for monitor. Analog DAC output, designed to drive a 37.5-Ohm equivalent load.	O Analog		If VGA is used than signal should be pulled to GND by 150Ω on the carrier
VGA_GRN	B91	Green for monitor Analog DAC output, designed to drive a 37.5-Ohm equivalent load.	O Analog		If VGA is used than signal should be pulled to GND by 150Ω on the carrier
VGA_BLU	B92	Blue for monitor. Analog DAC output, designed to drive a 37.5-Ohm equivalent load.	O Analog		If VGA is used than signal should be pulled to GND by 150Ω on the carrier
VGA_HSYNC	B93	Horizontal sync output to VGA monitor	O 3.3V		
VGA_VSYNC	B94	Vertical sync output to VGA monitor	O 3.3V		
VGA_I2C_CK	B95	DDC clock line (I²C port dedicated to identify VGA monitor capabilities)	I/O OD 3.3V	PU 2k2 3.3V	
VGA_I2C_DAT	B96	DDC data line.	I/O OD 3.3V	PU 2k2 3.3V	

3.3.3. LVDS

Signal	Pin #	Description	I/O	PU/PD	Comment
LVDS_A0+ LVDS_A0- LVDS_A1+ LVDS_A1- LVDS_A2+ LVDS_A2- LVDS_A3+ LVDS_A3-	A71 A72 A73 A74 A75 A76 A78 A79	LVDS Channel A differential pairs	O LVDS		
LVDS_A_CK+ LVDS_A_CK-	A81 A82	LVDS Channel A differential clock	O LVDS		
LVDS_B0+ LVDS_B0-	B71 B72	LVDS Channel B differential pairs	O LVDS		

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Signal	Pin #	Description	I/O	PU/PD	Comment
LVDS_B1+ LVDS_B1- LVDS_B2+ LVDS_B2- LVDS_B3+ LVDS_B3-	B73 B74 B75 B76 B77 B78				
LVDS_B_CK+ LVDS_B_CK-	B81 B82	LVDS Channel B differential clock	O LVDS		
LVDS_VDD_EN	A77	LVDS panel power enable	O 3.3V		
LVDS_BKLT_EN	B79	LVDS panel backlight enable	O 3.3V		
LVDS_BKLT_CTRL	B83	LVDS panel backlight brightness control	O 3.3V		
LVDS_I2C_CK	A83	DDC lines used for flat panel detection and control.	O 3.3V	PU 2k2 3.3V	
LVDS_I2C_DAT	A84	DDC lines used for flat panel detection and control.	I/O 3.3V	PU 2k2 3.3V	

3.3.4. Gigabit Ethernet

Gigabit Ethernet	Pin #	Description	I/O	PU/PD	Comment
GBE0_MDI0+ GBE0_MDI0- GBE0_MDI1+ GBE0_MDI1- GBE0_MDI2+ GBE0_MDI2- GBE0_MDI3+ GBE0_MDI3-	A13 A12 A10 A9 A7 A6 A3 A2	Gigabit Ethernet Controller 0: Media Dependent Interface Differential Pairs 0, 1, 2, 3. The MDI can operate in 1000, 100, and 10Mbit/sec modes. Some pairs are unused in some modes according to the following: 1000BASE-T / 100BASE-TX / 10BASE-T MDI[0]+/- B1_DA+/- TX+/- TX+/- MDI[1]+/- B1_DB+/- RX+/- RX+/- MDI[2]+/- B1_DC+/- MDI[3]+/- B1_DD+/-	I/O Analog		Twisted pair signals for external transformer.
GBE0_ACT#	B2	Gigabit Ethernet Controller 0 activity indicator, active low.	O 3.3VSB		
GBE0_LINK#	A8	Gigabit Ethernet Controller 0 link indicator, active low.	O 3.3VSB		
GBE0_LINK100#	A4	Gigabit Ethernet Controller 0 100Mbit/sec link indicator, active low.	O 3.3VSB		
GBE0_LINK1000#	A5	Gigabit Ethernet Controller 0 1000Mbit/sec link indicator, active low.	O 3.3VSB		
GBE0_CTREF	A14	Reference voltage for Carrier Board Ethernet channel 1 and 2 magnetics center tap. The reference voltage is determined by the requirements of the Module PHY and may be as low as 0V and as high as 3.3V. The reference voltage output shall be current limited on the Module. In the case in which the reference is shorted to ground, the current shall be 250 mA or less.	GND min 3.3V max		

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

3.3.5. Serial ATA

Signal	Pin #	Description	I/O	PU/PD	Comment
SATA0_TX+ SATA0_TX-	A16 A17	Serial ATA channel 0, Transmit Output differential pair.	O SATA		AC coupled on Module
SATA0_RX+ SATA0_RX-	A19 A20	Serial ATA channel 0, Receive Input differential pair.	I SATA		AC coupled on Module
SATA1_TX+ SATA1_TX-	B16 B17	Serial ATA channel 1, Transmit Output differential pair.	O SATA		AC coupled on Module
SATA1_RX+ SATA1_RX-	B19 B20	Serial ATA channel 1, Receive Input differential pair.	I SATA		AC coupled on Module
SATA2_TX+ SATA2_TX-	A22 A23	Serial ATA channel 2, Transmit Output differential pair.	O SATA		AC coupled on Module
SATA2_RX+ SATA2_RX-	A25 A26	Serial ATA channel 2, Receive Input differential pair.	I SATA		AC coupled on Module
SATA3_TX+ SATA3_TX-	B22 B23	Serial ATA channel 3, Transmit Output differential pair.	O SATA		AC coupled on Module
SATA3_RX+ SATA3_RX-	B25 B26	Serial ATA channel 3, Receive Input differential pair.	I SATA		AC coupled on Module
(S)ATA_ACT#	A28	ATA (parallel and serial) or SAS activity indicator, active low.	O 3.3V		

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

3.3.6. PCI Express

Signal	Pin #	Description	I/O	PU/PD	Comment
PCIE_TX0+ PCIE_TX0-	A68 A69	PCI Express channel 0, Transmit Output differential pair.	O PCIE		AC coupled on Module
PCIE_RX0+ PCIE_RX0-	B68 B69	PCI Express channel 0, Receive Input differential pair.	I PCIE		AC coupled off Module
PCIE_TX1+ PCIE_TX1-	A64 A65	PCI Express channel 1, Transmit Output differential pair.	O PCIE		AC coupled on Module
PCIE_RX1+ PCIE_RX1-	B64 B65	PCI Express channel 1, Receive Input differential pair.	I PCIE		AC coupled off Module
PCIE_TX2+ PCIE_TX2-	A61 A62	PCI Express channel 2, Transmit Output differential pair.	O PCIE		AC coupled on Module
PCIE_RX2+ PCIE_RX2-	B61 B62	PCI Express channel 2, Receive Input differential pair.	I PCIE		AC coupled off Module
PCIE_TX3+ PCIE_TX3-	A58 A59	PCI Express channel 3, Transmit Output differential pair.	O PCIE		AC coupled on Module
PCIE_RX3+ PCIE_RX3-	B58 B59	PCI Express channel 3, Receive Input differential pair.	I PCIE		AC coupled off Module
PCIE_TX4+ PCIE_TX4-	A55 A56	PCI Express channel 4, Transmit Output differential pair.	O PCIE		AC coupled on Module
PCIE_RX4+ PCIE_RX4-	B55 B56	PCI Express channel 4, Receive Input differential pair.	I PCIE		AC coupled off Module
PCIE_TX5+ PCIE_TX5-	A52 A53	PCI Express channel 5, Transmit Output differential pair.	O PCIE		AC coupled on Module
PCIE_RX5+ PCIE_RX5-	B52 B53	PCI Express channel 5, Receive Input differential pair.	I PCIE		AC coupled off Module
PCIE_CLK_REF+ PCIE_CLK_REF-	A88 A89	PCI Express Reference Clock output for all PCI Express and PCI Express Graphics Lanes.	O PCIE		

3.3.7. Express Card

Signal	Pin #	Description	I/O	PU/PD	Comment
EXCD0_CPPE# EXCD1_CPPE#	A49 B48	PCI ExpressCard: PCI Express capable card request	I 3.3V	PU 10k 3.3V	
EXCD0_PERST# EXCD1_PERST#	A48 B47	PCI ExpressCard: reset	O 3.3V		Cannot be tested on Express-BASE6 (DVT issue)

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

3.3.8. LPC bus

Signal	Pin #	Description	I/O	PU/PD	Comment
LPC_AD[0:3]	B4-B7	LPC multiplexed address, command and data bus	I/O 3.3V		
LPC_FRAME#	B3	LPC frame indicates the start of an LPC cycle	O 3.3V		
LPC_DRQ0# LPC_DRQ1#	B8 B9	LPC serial DMA request	I 3.3V		
LPC_SERIRQ	A50	LPC serial interrupt	I/O OD 3.3V	PU 8k2 3.3V	
LPC_CLK	B10	LPC clock output - 33MHz nominal	O 3.3V		

3.3.9. USB

Signal	Pin #	Description	I/O	PU/PD	Comment
USB0+ USB0-	A46 A45	USB differential data pairs for Port 0	I/O 3.3VSB		USB 1.1/ 2.0 compliant
USB1+ USB1-	B46 B45	USB differential data pairs for Port 1	I/O 3.3VSB		USB 1.1/ 2.0 compliant
USB2+ USB2-	A43 A42	USB differential data pairs for Port 1	I/O 3.3VSB		USB 1.1/ 2.0 compliant
USB3+ USB3-	B43 B42	USB differential data pairs for Port 2	I/O 3.3VSB		USB 1.1/ 2.0 compliant
USB4+ USB4-	A40 A39	USB differential data pairs for Port 3	I/O 3.3VSB		USB 1.1/ 2.0 compliant
USB5+ USB5-	B40 B39	USB differential data pairs for Port 4	I/O 3.3VSB		USB 1.1/ 2.0 compliant
USB6+ USB6-	A37 A36	USB differential data pairs for Port 5	I/O 3.3VSB		USB 1.1/ 2.0 compliant
USB7+ USB7-	B37 B37	USB differential data pairs for Port 6	I/O 3.3VSB		USB 1.1/ 2.0 compliant
USB_0_1_OC#	B44	USB over-current sense, USB ports 0 and 1. A pull-up for this line shall be present on the module. An open drain driver from a USB current monitor on the carrier board may drive this line low.	I 3.3VSB	PU 10k 3.3VSB	Do not pull high on carrier
USB_2_3_OC#	A44	USB over-current sense, USB ports 2 and 3. A pull-up for this line shall be present on the module. An open drain driver from a USB current monitor on the carrier board may drive this line low. .	I 3.3VSB	PU 10k 3.3VSB	Do not pull high on carrier
USB_4_5_OC#	B38	USB over-current sense, USB ports 4 and 5. A pull-up for this line shall be present on the module. An open drain driver from a USB current monitor on the carrier board may drive this line low.	I 3.3VSB	PU 10k 3.3VSB	Do not pull high on carrier
USB_6_7_OC#	A38	USB over-current sense, USB ports 6 and 7. A pull-up for this line shall be present on the module. An open drain driver from a USB current monitor on the carrier board may drive this line low.	I 3.3VSB	PU 10k 3.3VSB	Do not pull high on carrier

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

3.3.10. SPI (BIOS only)

Signal	Pin #	Description	I/O	PU/PD	Comment
SPI_CS#	B97	Chip select for Carrier Board SPI BIOS Flash.	O 3.3VSB		
SPI_MISO	A92	Data in to module from carrier board SPI BIOS flash.	I 3.3VSB		
SPI_MOSI	A95	Data out from module to carrier board SPI BIOS flash.	O 3.3VSB		
SPI_CLK	A94	Clock from module to carrier board SPI BIOS flash.	O 3.3VSB		
SPI_POWER	A91	Power supply for Carrier Board SPI – sourced from Module – nominally 3.3V. The Module shall provide a minimum of 100mA on SPI_POWER. Carriers shall use less than 100mA of SPI_POWER. SPI_POWER shall only be used to power SPI devices on the Carrier	O P 3.3VSB		
BIOS_DIS0#	A34	Selection strap to determine the BIOS boot device.	I	PU 10K 3.3V	Carrier shall pull to GND or leave no- connect.
BIOS_DIS1#	B88	Selection strap to determine the BIOS boot device.	I	PU 10K 3.3V	Carrier shall pull to GND or leave no- connect

3.3.11. Miscellaneous

Signal	Pin #	Description	I/O	PU/PD	Comment
SPKR	B32	Output for audio enunciator, the “speaker” in PC-AT systems	O 3.3V		
WDT	B27	Output indicating that a watchdog time-out event has occurred.	O 3.3V		
THRM#	B35	Input from off-module temp sensor indicating an over-temp situation.	I 3.3V		
THERMTRIP#	A35	Active low output indicating that the CPU has entered thermal shutdown.	O 3.3V		
FAN_PWMOUT	B101	Fan speed control. Uses the Pulse Width Modulation (PWM) technique to control the fan’s RPM.	O OD 3.3V		
FAN_TACHIN11	B102	Fan tachometer input for a fan with a two pulse output.	I OD 3.3V	PU 10k 3.3V	
TPM_PP11	C83	Trusted Platform Module (TPM) Physical Presence pin. Active high. TPM chip has an internal pull down. This signal is used to indicate Physical Presence to the TPM.	I 3.3V	PD 3.3V	If TPM not installed on module than remove PD 3.3V

3.3.12. SMBus

Signal	Pin #	Description	I/O	PU/PD	Comment
SMB_CK	B13	System Management Bus bidirectional clock line. Power sourced through 5V standby rail and main power rails.	I/O OD 3.3VSB	PU 2k2 3.3VSB	
SMB_DAT#	B14	System Management Bus bidirectional data line. Power sourced through 5V standby rail and main power rails.	I/O OD 3.3VSB	PU 2k2 3.3VSB	
SMB_ALERT#	B15	System Management Bus Alert – active low input can be used to generate an SMI# (System Management Interrupt) or to wake the system. Power sourced through 5V standby rail and main power rails.	I 3.3VSB		

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

3.3.13. I2C Bus

Signal	Pin #	Description	I/O	PU/PD	Comment
I2C_CK	B33	General purpose I²C port clock output/input	I/O OD 3.3VSB	PU 2k2 3.3VSB	
I2C_DAT	B34	General purpose I²C port data I/O line	I/O OD 3.3VSB	PU 2k2 3.3VSB	

3.3.14. General Purpose I/O (GPIO)

Signal	Pin #	Description	I/O	PU/PD	Comment
GPO[0]	A93	General purpose output pins.	O 3.3V		
GPO[1]	B54	General purpose output pins.	O 3.3V		
GPO[2]	B57	General purpose output pins.	O 3.3V		
GPO[3]	B63	General purpose output pins.	O 3.3V		
GPI[0]	A54	General purpose input pins. Pulled high internally on the module.	I 3.3V	PU 10K 3.3V	PU not in PICMG suggest 10K
GPI[1]	A63	General purpose input pins. Pulled high internally on the module.	I 3.3V	PU 10K 3.3V	PU not in PICMG suggest 10K
GPI[2]	A67	General purpose input pins. Pulled high internally on the module.	I 3.3V	PU 10K 3.3V	PU not in PICMG suggest 10K
GPI[3]	A85	General purpose input pins. Pulled high internally on the module.	I 3.3V	PU 10K 3.3V	PU not in PICMG suggest 10K

3.3.15. Power And System Management

Signal	Pin #	Description	I/O	PU/PD	Comment
PWRBTN#	B12	Power button to bring system out of S5 (soft off), active on falling edge.	I 3.3VSB	PU 10k 3.3VSB	
SYS_RESET#	B49	Reset button input. Active low request for module to reset and reboot. May be falling edge sensitive. For situations when SYS_RESET# is not able to reestablish control of the system, PWR_OK or a power cycle may be used.	I 3.3VSB	PU 10k 3.3VSB	
CB_RESET#	B50	Reset output from module to Carrier Board. Active low. Issued by module chipset and may result from a low SYS_RESET# input, a low PWR_OK input, a VCC_12V power input that falls below the minimum specification, a watchdog timeout, or may be initiated by the module software.	O 3.3VSB		
PWR_OK	B24	Power OK from main power supply. A high value indicates that the power is good. This signal can be used to hold off Module startup to allow carrier based FPGAs or other configurable devices time to be programmed.	I 3.3V	TBD by R&D in CPLD	Should have weak pull up
SUS_STAT#	B18	Indicates imminent suspend operation; used to notify LPC devices.	O 3.3VSB		
SUS_S3#	A15	Indicates system is in Suspend to RAM state. Active-low output. An inverted copy of SUS_S3# on the carrier board (also known as “PS_ON”) may be used to enable the non-standby power on a typical ATX power supply.	O 3.3VSB		
SUS_S4#	A18	Indicates system is in Suspend to Disk state. Active low output.	O 3.3VSB		
SUS_S5#	A24	Indicates system is in Soft Off state.	O 3.3VSB		
WAKE0#	B66	PCI Express wake up signal.	I 3.3VSB	PU 10k 3.3VSB	

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Signal	Pin #	Description	I/O	PU/PD	Comment
WAKE1#	B67	General purpose wake up signal. May be used to implement wake-up on PS/2 keyboard or mouse activity.	I 3.3VSB	PU 10k 3.3VSB	
BATLOW#	A27	Battery low input. This signal may be driven low by external circuitry to signal that the system battery is low, or may be used to signal some other external power-management event.	I 3.3VSB	PU 10k 3.3VSB	
LID#		LID button. Low active signal used by the ACPI operating system for a LID switch.	I OD 3.3VSB	PU 10k 3.3VSB	
SLEEP#		Sleep button. Low active signal used by the ACPI operating system to bring the system to sleep state or to wake it up again.	I OD 3.3VSB	PU 10K 3.3VSB	

3.3.16. Power and Ground

Signal	Pin #	Description	I/O	PU/PD	Comment
VCC_12V	A104-A109 B104-B109	Primary power input: +12V nominal (5 ~ 19V). See section 7 “Electrical Specifications“ for allowable input range. All available VCC_12V pins on the connector(s) shall be used.	P		8.5~19 V
VCC_5V_SBY	B84-B87	Standby power input: +5.0V nominal. See section 7 “Electrical Specifications“ for allowable input range. If VCC5_SBY is used, all available VCC_5V_SBY pins on the connector(s) shall be used. Only used for standby and suspend functions. May be left unconnected if these functions are not used in the system design.	P		5Vsb ±5%
VCC_RTC	A47	Real-time clock circuit-power input. Nominally +3.0V.	P		
GND	A1, A11, A21, A31, A41, A51, A57, A66, A80, A90, A96, A100, A110, B1, B11, B21 ,B31, B41, B51, B60, B70, B80, B90, B100, B110	Ground - DC power and signal and AC signal return path.	P		

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

3.4. CD Signal Descriptions

3.4.1. USB 3.0 extension

Signal	Pin	Description	I/O	PU/PD	Comment
USB_SSRX0- USB_SSRX0+	C3 C4	Additional Receive signal differential pairs for the SuperSpeed USB data path on USB0	I PCIE		
USB_SSTX0- USB_SSTX0+	D3 D4	Additional Transmit signal differential pairs for the SuperSpeed USB data path on USB0	O PCIE		AC coupled on Module
USB_SSRX1- USB_SSRX1+	C6 C7	Additional Receive signal differential pairs for the SuperSpeed USB data path on USB1	I PCIE		
USB_SSTX1- USB_SSTX1+	D6 D7	Additional Transmit signal differential pairs for the SuperSpeed USB data path on USB1	O PCIE		AC coupled on Module
USB_SSRX2- USB_SSRX2+	C9 C10	Additional Receive signal differential pairs for the SuperSpeed USB data path on USB2	I PCIE		
USB_SSTX2- USB_SSTX2+	D9 D10	Additional Transmit signal differential pairs for the SuperSpeed USB data path on USB2	O PCIE		AC coupled on Module
USB_SSRX3- USB_SSRX3+	C12 C13	Additional Receive signal differential pairs for the SuperSpeed USB data path on USB3	I PCIE		
USB_SSTX3- USB_SSTX3+	D12 D13	Additional Transmit signal differential pairs for the SuperSpeed USB data path on USB3	O PCIE		AC coupled on Module

3.4.2. PCI Express x1

Signal	Pin #	Description	I/O	PU/PD	Comment
PCIE_TX6+ PCIE_TX6-	D19 D20	PCI Express channel 6, Transmit Output differential pair.	O PCIE		AC coupled on Module
PCIE_RX6+ PCIE_RX6-	C19 C20	PCI Express channel 6, Receive Input differential pair.	I PCIE		AC coupled off Module
PCIE_TX7+ PCIE_TX7-	D22 D23	PCI Express channel 7, Transmit Output differential pair.	O PCIE		Not available used by LAN
PCIE_RX7+ PCIE_RX7-	C22 C23	PCI Express channel 7, Receive Input differential pair.	I PCIE		Not available used by LAN

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

3.4.3. DDI Channels

DDI 1

Signal	Pin	Description	I/O	PU/PD	Comment
DDI1_PAIR0+	D26	Digital Display Interface1 differential pairs	O PCIE		SDVO1_RED+ (AC coupled)
DDI1_PAIR0-	D27				SDVO1_RED- (AC coupled)
DDI1_PAIR1+	D29				SDVO1_GRN+ (AC coupled)
DDI1_PAIR1-	D30				SDVO1_GRN- (AC coupled)
DDI1_PAIR2+	D32				SDVO1_BLU+ (AC coupled)
DDI1_PAIR2-	D33				SDVO1_BLU- (AC coupled)
DDI1_PAIR3+	D36				SDVO1_CK+ (AC coupled)
DDI1_PAIR3-	D37				SDVO1_CK- (AC coupled)
DDI1_PAIR4+	C25				SDVO1_INT+
DDI1_PAIR4-	C26				SDVO1_INT-
DDI1_PAIR5+	C29				SDVO1_TVCLKIN+
DDI1_PAIR5-	C30				SDVO1_TVCLKIN-
DDI1_PAIR6+	C15				SDVO1_FLDSTALL+
DDI1_PAIR6-	C16				SDVO1_FLDSTALL-
DDI1_HPD	C24	Digital Display Interface Hot-Plug Detect	I PCIE		
DDI1_CTRLCLK_AUX+	D15	IF DDI1_DDC_AUX_SEL is floating	I/O PCIe		DP1_AUX+
		IF DDI1_DDC_AUX_SEL pulled high	I/O OD 3.3V		SDVO1_CTRLCLK HDMI1_CTRLCLK
DDI1_CTRLCLK_AUX-	D16	IF DDI1_DDC_AUX_SEL is floating	I/O PCIe		DP1_AUX+
		IF DDI1_DDC_AUX_SEL pulled high	I/O OD 3.3V		SDVO1_CTRLDATA HDMI1_CTRLDATA
DDI1_DDC_AUX_SEL	D34	Selects the function of DDI1_CTRLCLK_AUX+ and DDI1_CTRLDATA_AUX-. This pin shall have a 1M pull-down to logic ground on the Module. If this input is floating the AUX pair is used for the DP AUX+/- signals. If pulled-high the AUX pair contains the CRTLCLK and CTRLDATA signals.	I/O OD 3.3V	PD 1M	

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

DDI 2

Signal	Pin	Description	I/O	PU/PD	Comment
DDI2_PAIR0+ DDI2_PAIR0- DDI2_PAIR1+ DDI2_PAIR1- DDI2_PAIR2+ DDI2_PAIR2- DDI2_PAIR3+ DDI2_PAIR3-	D39 D40 D42 D43 D46 D47 D49 D50	Digital Display Interface2 differential pairs			
DDI2_HPD	D44				
DDI2_CTRLCLK_AUX+	C32	IF DDI2_DDC_AUX_SEL is floating	I/O PCIe		DP2_AUX+
		IF DDI2_DDC_AUX_SEL pulled high	I/O OD 3.3V		HDMI2_CTRLCLK
DDI2_CTRLCLK_AUX-	C33	IF DDI2_DDC_AUX_SEL is floating	I/O PCIe		DP2_AUX+
		IF DDI2_DDC_AUX_SEL pulled high	I/O OD 3.3V		HDMI2_CTRLDATA
DDI2_DDC_AUX_SEL	C34	Selects the function of DDI2_CTRLCLK_AUX+ and DDI2_CTRLDATA_AUX-. This pin shall have a 1M pull-down to logic ground on the Module. If this input is floating the AUX pair is used for the DP AUX+/- signals. If pulled-high the AUX pair contains the CRTLCLK and CTRLDATA signals.		PD 1M	

DDI 3

Signal	Pin	Description	I/O	PU/PD	Comment
DDI3_PAIR0+ DDI3_PAIR0- DDI3_PAIR1+ DDI3_PAIR1- DDI3_PAIR2+ DDI3_PAIR2- DDI3_PAIR3+ DDI3_PAIR3-	C39 C40 C42 C43 C46 C47 C49 C50	Digital Display Interface3 differential pairs			
DDI3_HPD	C44				
DDI3_CTRLCLK_AUX+	C36	IF DDI3_DDC_AUX_SEL is floating	I/O PCIe		DP3_AUX+
		IF DDI3_DDC_AUX_SEL pulled high	I/O OD 3.3V		HDMI3_CTRLCLK
DDI3_CTRLCLK_AUX-	C37	IF DDI3_DDC_AUX_SEL is floating	I/O PCIe		DP3_AUX+
		IF DDI3_DDC_AUX_SEL pulled high	I/O OD 3.3V		HDMI3_CTRLDATA
DDI3_DDC_AUX_SEL	C38	Selects the function of DDI3_CTRLCLK_AUX+ and DDI3_CTRLDATA_AUX-. This pin shall have a 1M pull-down to logic ground on the Module. If this input is floating the AUX pair is used for the DP AUX+/- signals. If pulled-high the AUX pair contains the CRTLCLK and CTRLDATA signals.		PD 1M	

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

3.4.4. DDI to DP/HDMI/SDVO Mapping

Pin	Pin Name	SDVO	DP	HDMI \ DVI
D26	DDI1_PAIR0+	SDVO1_RED+	DP1_LANE0+	TMDS1_DATA2+
D27	DDI1_PAIR0-	SDVO1_RED-	DP1_LANE0-	TMDS1_DATA2-
D29	DDI1_PAIR1+	SDVO1_GRN+	DP1_LANE1+	TMDS1_DATA1+
D30	DDI1_PAIR1-	SDVO1_GRN-	DP1_LANE1-	TMDS1_DATA1-
D32	DDI1_PAIR2+	SDVO1_BLU+	DP1_LANE2+	TMDS1_DATA0+
D33	DDI1_PAIR2-	SDVO1_BLU-	DP1_LANE2-	TMDS1_DATA0-
D36	DDI1_PAIR3+	SDVO1_CK+	DP1_LANE3+	TMDS1_CLK+
D37	DDI1_PAIR3-	SDVO1_CK-	DP1_LANE3-	TMDS1_CLK-
C25	DDI1_PAIR4+	SDVO1_INT+		
C26	DDI1_PAIR4-	SDVO1_INT-		
C29	DDI1_PAIR5+	SDVO1_TVCLKIN+		
C30	DDI1_PAIR5-	SDVO1_TVCLKIN-		
C15	DDI1_PAIR6+	SDVO1_FLDSTALL+		
C16	DDI1_PAIR6-	SDVO1_FLDSTALL-		
C24	DDI1_HPD		DP1_HPD	HDMI1_HPD
D15	DDI1_CTRLCLK_AUX+	SDVO1_CTRLCLK	DP1_AUX+	HMDI1_CTRLCLK
D16	DDI1_CTRLDATA_AUX-	SDVO1_CTRLDATA	DP1_AUX-	HMDI1_CTRLDATA
D34	DDI1_DDC_AUX_SEL			
D39	DDI2_PAIR0+		DP2_LANE0+	TMDS2_DATA2+
D40	DDI2_PAIR0-		DP2_LANE0-	TMDS2_DATA2-
D42	DDI2_PAIR1+		DP2_LANE1+	TMDS2_DATA1+
D43	DDI2_PAIR1-		DP2_LANE1-	TMDS2_DATA1-
D46	DDI2_PAIR2+		DP2_LANE2+	TMDS2_DATA0+
D47	DDI2_PAIR2-		DP2_LANE2-	TMDS2_DATA0-
D49	DDI2_PAIR3+		DP2_LANE3+	TMDS2_CLK+
D50	DDI2_PAIR3-		DP2_LANE3-	TMDS2_CLK-
D44	DDI2_HPD		DP2_HPD	HDMI2_HPD
C32	DDI2_CTRLCLK_AUX+		DP2_AUX+	HDMI2_CTRLCLK
C33	DDI2_CTRLDATA_AUX-		DP2_AUX-	HDMI2_CTRLDATA
C34	DDI2_DDC_AUX_SEL			
C39	DDI3_PAIR0+		DP3_LANE0+	TMDS3_DATA2+
C40	DDI3_PAIR0-		DP3_LANE0-	TMDS3_DATA2-
C42	DDI3_PAIR1+		DP3_LANE1+	TMDS3_DATA1+
C43	DDI3_PAIR1-		DP3_LANE1-	TMDS3_DATA1-
C46	DDI3_PAIR2+		DP3_LANE2+	TMDS3_DATA0+
C47	DDI3_PAIR2-		DP3_LANE2-	TMDS3_DATA0-
C49	DDI3_PAIR3+		DP3_LANE3+	TMDS3_CLK+
C50	DDI3_PAIR3-		DP3_LANE3-	TMDS3_CLK-
C44	DDI3_HPD		DP3_HPD	HDMI3_HPD
C36	DDI3_CTRLCLK_AUX+		DP3_AUX+	HDMI3_CTRLCLK
C37	DDI3_CTRLDATA_AUX-		DP3_AUX-	HDMI3_CTRLDATA
C38	DDI3_DDC_AUX_SEL			

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

3.4.5. PCI Express Graphics x16 (PEG)

Signal	Pin	Description	I/O	PU/PD	Comment
PEG_RX0+ PEG_RX0- PEG_RX1+ PEG_RX1- PEG_RX2+ PEG_RX2- PEG_RX3+ PEG_RX3- PEG_RX4+ PEG_RX4- PEG_RX5+ PEG_RX5- PEG_RX6+ PEG_RX6- PEG_RX7+ PEG_RX7- PEG_RX8+ PEG_RX8- PEG_RX9+ PEG_RX9- PEG_RX10+ PEG_RX10- PEG_RX11+ PEG_RX11- PEG_RX12+ PEG_RX12- PEG_RX13+ PEG_RX13- PEG_RX14+ PEG_RX14- PEG_RX15+ PEG_RX15	C52 C53 C55 C56 C58 C59 C61 C62 C65 C66 C68 C69 C71 C72 C74 C75 C78 C79 C81 C82 C85 C86 C88 C89 C91 C92 C94 C95 C98 C99 C101 C102	PCI Express Graphics transmit differential pairs.	I PCIE		AC coupled on Module
PEG_TX0+ PEG_TX0- PEG_TX1+ PEG_TX1- PEG_TX2+ PEG_TX2- PEG_TX3+ PEG_TX3- PEG_TX4+ PEG_TX4- PEG_TX5+ PEG_TX5- PEG_TX6+ PEG_TX6- PEG_TX7+ PEG_TX7- PEG_TX8+ PEG_TX8- PEG_TX9+ PEG_TX9- PEG_TX10+ PEG_TX10- PEG_TX11+ PEG_TX11- PEG_TX12+ PEG_TX12- PEG_TX13+ PEG_TX13- PEG_TX14+ PEG_TX14-	D52 D53 D55 D56 D58 D57 D61 D62 D65 D66 D68 D69 D71 D72 D74 D75 D78 D79 D81 D82 D85 D86 D88 D89 D91 D92 D94 D95 D98 D99	PCI Express Graphics receive differential pairs.	O PCIE		AC coupled off Module

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Signal	Pin	Description	I/O	PU/PD	Comment
PEG_TX15+ PEG_TX15-	D101 D102				AC coupled off Module
PEG_LANE_RV#	D54	PCI Express Graphics lane reversal input strap. Pull low on the Carrier board to reverse lane order.	I 1.05V		

3.4.6. Module Type Definition

Signal	Pin #	Description	I/O	Comment
TYPE0# TYPE1# TYPE2#	C54 C57 D57	The TYPE pins indicate to the Carrier Board the Pin-out Type that is implemented on the module. The pins are tied on the module to either ground (GND) or are no-connects (NC). For Pinout Type 1, these pins are don't care (X). TYPE2# TYPE1# TYPE0# X X X Pinout Type 1 NC NC NC Pinout Type 2 NC NC GND Pinout Type 3 (no IDE) NC GND NC Pinout Type 4 (no PCI) NC GND GND Pinout Type 5 (no IDE, no PCI) GND NC NC Pinout Type 6 (no IDE, no PCI) The Carrier Board should implement combinatorial logic that monitors the module TYPE pins and keeps power off (e.g deactivates the ATX_ON signal for an ATX power supply) if an incompatible module pin-out type is detected. The Carrier Board logic may also implement a fault indicator such as an LED.		

3.4.7. Power and Ground


Signal	Pin #	Description	I/O	PU/PD	Comment
VCC_12V	C104-C109 D104-D109	Primary power input: +12V nominal. All available VCC_12V pins on the connector(s) shall be used.	P		8.5 ~ 19V
GND	C1, C11, C21, C31, C41, C51, C60, C70, C76, C80, C84, C87, C90, C93, C96, C100, C103, C110, D1, D11, D21, D31, D41, D51, D60, D67, D70, D76, D80, D84, D87, D90, D93, D96, D100, D103, D110	Ground - DC power and signal and AC signal return path. All available GND connector pins shall be used and tied to carrier board GND plane.	P		

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

4. Module Configuration

4.1. PCI Express Configuration Switch (SW1)


Switch SW1 allows you to configure the PCI Express x16 lanes from the CPU as 1 PCIe x16, 2 PCIe x8, or 1 PCIe x8 + 2 PCIe x4.

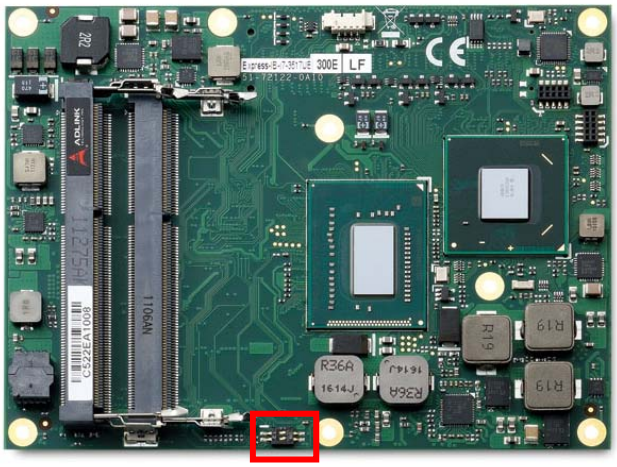

Mode	Pin 1	Pin 2
1 PCIe x8 + 2 PCIe x4	On	On
Reserved	On	Off
2 x8 PCI Express	Off	On
1 x16 PCI Express (Default)	Off	Off

4.2. PCIe x16-to-two-x8 Adapter Card

The Express-IB can be used with the PCIe x16-to-two-x8 Adapter Card on the Express-BASE6 Reference Carrier to support bifurbication of the CPU's PEG interface (PCIe x16). The card reroutes the PCIe x16 to two x8 and allows testing of two independent PCIe add-on cards with x8/x4/x2/x1 width. To use the card, set SW1 to "2 x8 PCI Express" as above.

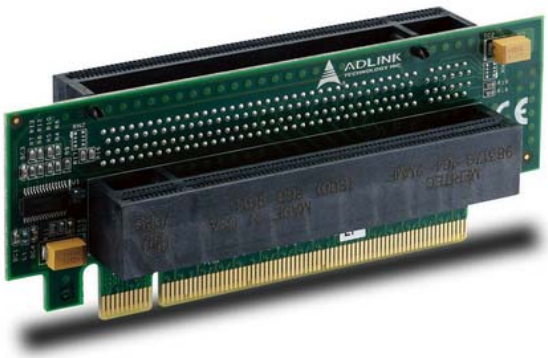

PCIex16-to-two-x8 Adapter Card
(Model: P16TO28, Part No.: 91-79301-0010)

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

5. Embedded Functions

All embedded board functions on ADLINK's Computer on Modules are supported at the operating system level using the ADLINK Intelligent Device Interface (AIDI) library. The AIDI API programming interface is compatible and identical across all ADLINK Computer on Modules and all supported operating systems. The AIDI library includes a demo program to demonstrate the library's functionallity.

5.1. Watchdog Timer




The Express-HR implements a Watchdog timer that can be used to automatically detect software execution problems or system hangs and reset the board if necessary. The Watchdog timer consists of a counter that counts down from an initial value to zero. When the system is operating normally, the software that sets the intial value periodically resets the counter so that the it never reaches zero. If the counter reaches zero before the software resets it, the system is presumed to be malfunctioning and a reset signal is asserted.

The AIDI Library Watchdog functions support Watchdog control of the board. If the Watchdog begins countdown and reaches zero, it will access the CPU's RESET signal to reset the system. This application must call another function named AidiWDogTrigger that triggers the Watchdog to restart to prevent system reset.

5.1.1. AIDI Demo Program - Watchdog Tab

The AIDI Demo Program allows retrieval of the current Watchdog status and updating of the Watchdog settings

If the Watchdog is enabled, the user can click the WDT Trigger button to manually reset the counter and prevent the system from resetting

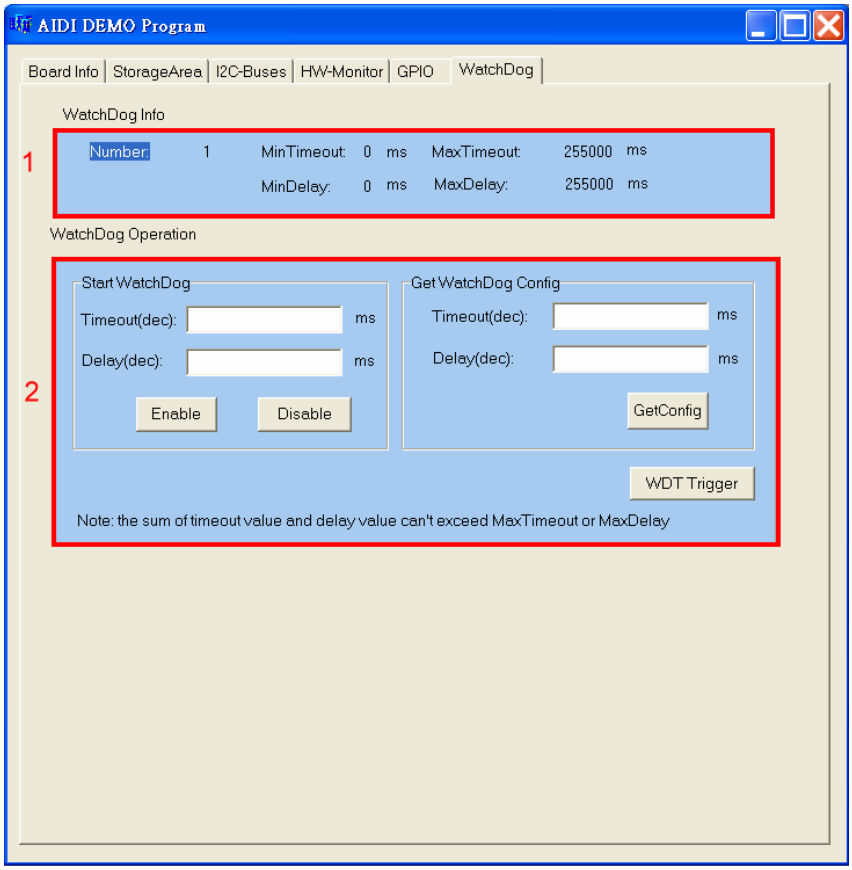

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

5.2. GPIO

GPIO library support is limited to GPIO signals that originate from the Computer on Module and extend to the carrier board. COM Express modules support 4 GPO and 4 GPI signals. Some of ADLINK's COM Express boards can configure all 8 ports for GPI or GPO use.

GPIO signals can be monitored and controlled by using the ADLINK Intelligent Device Interface (AIDI) library that is compatible and identical across all ADLINK COM Express modules and all supported operating systems.

The COM Express Type 6 standard assigns the following pins for either GPI or GPO.


Pin	Signal Type #	AIDI ID (bit)	Remark
A54	GPI0	0	Express-IB can configure this pin for GPI and GPO
A63	GPI1	1	Express-IB can configure this pin for GPI and GPO
A67	GPI2	2	Express-IB can configure this pin for GPI andGPO
A85	GPI3	3	Express-IB can configure this pin for GPI andGPO
A93	GPO0	4	Express-IB can configure this pin for GPI and GPO
B54	GPO1	5	Express-IB can configure this pin for GPI and GPO
B57	GPO2	6	Express-IB can configure this pin for GPI and GPO
B63	GPO3	7	Express-IB can configure this pin for GPI and GPO

5.2.1. AIDI Demo Program - GPIO Tab

The AIDI Demo Program displays current GPI or GPO status and allows reading of GPI and writing to GPO.

The table above links logical port numbers in AIDI to physical port numbers on the COM Express board-to-board connector.

For boards that support multi-direction the "SetDirection" button can configure the port for either GPI or GPO

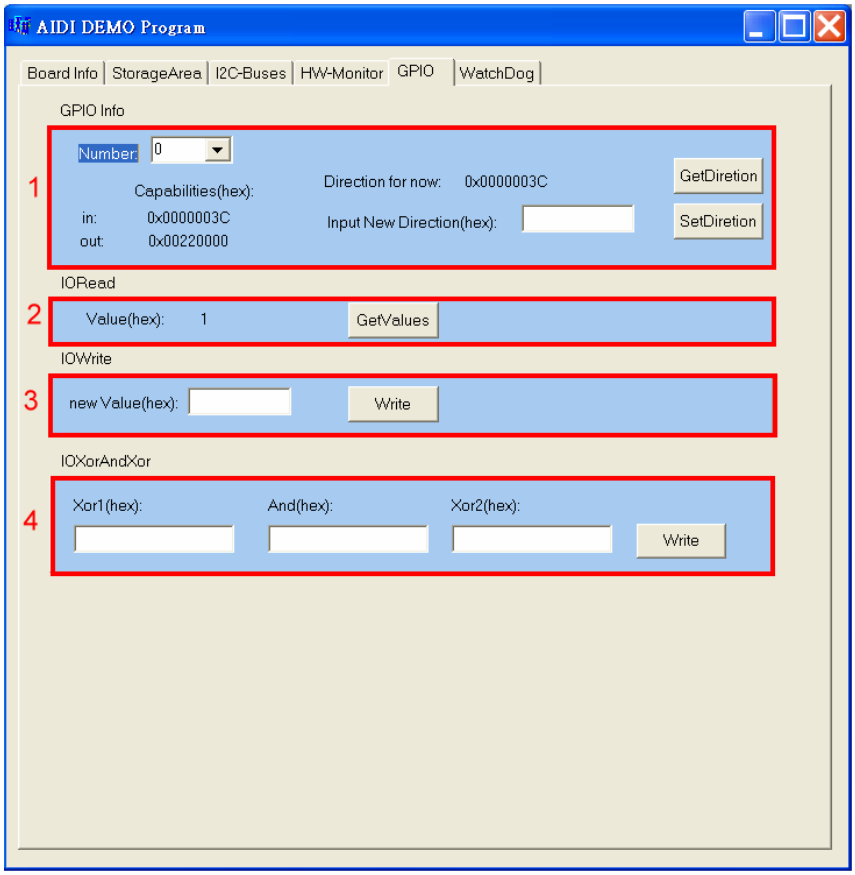

5.3. Hardware Monitoring

To ensure system health of your embedded system ADLINK's COM Express modules come with built in support for monitoring and control of CPU and system temperatures, fan speed and critical module voltage levels.

The AIDI Library provides simple APIs at the application level to support these functions and adds alarm functions when voltage or temperature levels exceed the upper or lower limit set by the user.

On the Express-HR the following monitored values can be read from the module:


CPU temperature, system temperature, Vcore, 1.8V, 5V, 3.3V and 12V.

5.3.1. AIDI Demo Program - HW Monitor Tab

Field 1 displays detected sensors (number).

Field 2 allows setting of upper and lower alarm limits.

Field 3 displays read out information of sensors.

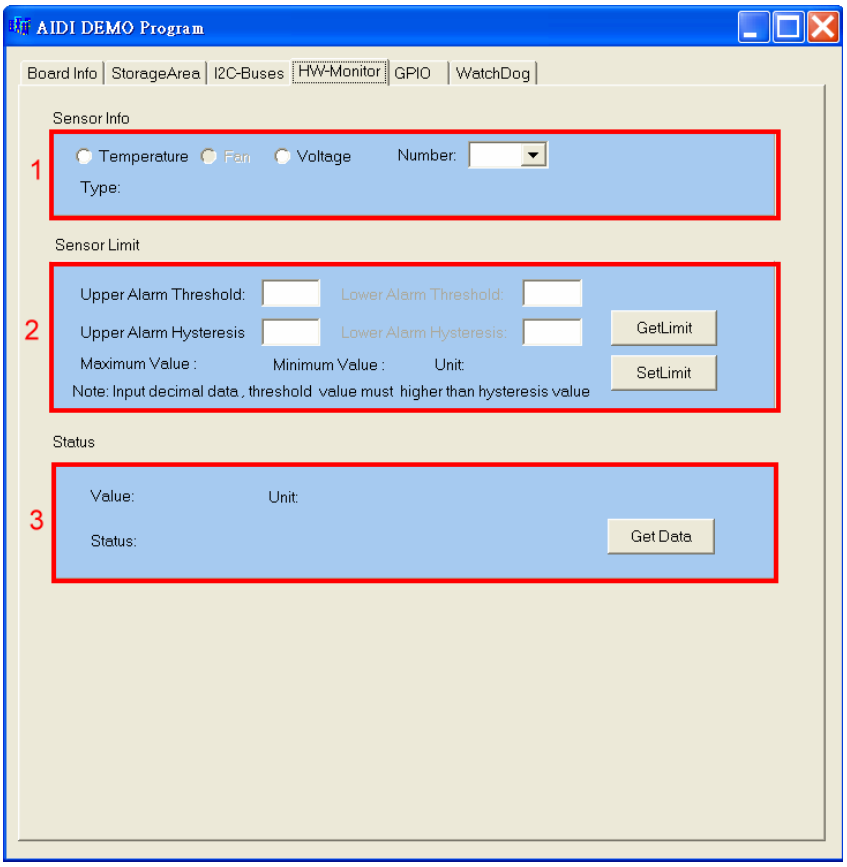

6. System Resources

6.1. System Memory Map

Address Range (decimal)	Address Range (hex)	Size	Description
(4GB-2MB)	FFE00000 – FFFFFFFF	2 MB	High BIOS Area
(4GB-18MB) – (4GB-17MB-1)	FEE00000 – FEEFFFFF	1 MB	FSB Interrupt Memory Space
(4GB-20MB) – (4GB-19MB-1)	FEC00000 – FECFFFFF	1 MB	APIC Configuration Space
960 K – 1024 K	F0000 – FFFFF	64 KB	System BIOS Area
896 K – 960 K	E0000 – EFFFF	64 KB	Extended System BIOS Area
768 K – 896 K	C0000 – DFFFF	128 KB	PCI expansion ROM area C0000 – C7FFF: Onboard VGA BIOS CB800 – CC7FFF: Intel 82566DM PXE option ROM when onboard LAN boot ROM is enabled. CC800 – CD7FFF: Marvell 88E805 option ROM when onboard LAN boot ROM is enabled.
640 K – 768 K	A0000 – BFFFF	128 KB	Video Buffer & SMM space
0 K – 640 K	00000 – 9FFFF	640 KB	DOS Area

6.2. Direct Memory Access Channels

Channel Number	Data Width	System Resource
0	8-bits	Generic
1	8-bits	Generic
2	8-bits	Generic
3	8-bits	Generic
4		Reserved - cascade channel
5	16-bits	Generic
6	16-bits	Generic
7	16-bits	Generic

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

6.3. I/O Map

Hex Range	Device
000-01F	DMA controller 1, 8237A-5 equivalent
020-02D and 030-03F	Interrupt controller 1, 8259 equivalent
02E-02F	LPC SIO configuration index/data registers
040-05F	Timer, 8254-2 equivalent
060, 062, 064, 066, 068-06F	8742 equivalent (keyboard)
061, 063, 065, 067	NMI control and status
070-07F	Real Time Clock Controller(bit 7 -NMI mask)
080-091	DMA page register
092	Reset (Bit 0)/ Fast Gate A20 (Bit 1)
93-9F	DMA page registers continued
0A0-0B1 and 0B4-0BF	Interrupt controller 2, 8259 equivalent
0B2 and 0B3	APM control and status port respectively
0C0-0DF	DMA controller 2, 8237A-5 equivalent
0E0-0EF	Available
0F0	Co-processor error register
0F1	N/A
0F2-0F3	N/A
0F4	IDE ID port
0F5-0F7	N/A
0F8	IDE Index port
0F9-0FB	N/A
0FC	IDE Data port
0FD-0FF	N/A
100-179	Available
180-181	Default AIM4 SRAM control register (May be remapped)
182-1EF	Available
1F0-1F7	Primary IDE Controller (AT Drive)
1FB-22F	Available
230 -277	Available
278-27F	Parallel Port 2
280-2F7	Available

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Hex Range	Device
2F8-2FF	Serial Port 2
300-36F	Available
370-377	Alt. Floppy Disk Controller
378-37F	Parallel Port 1
380-3AF	Available
3B0-3BB and 3BF	Mono/VGA mode video
3BC-3BE	Reserved for parallel port
3C0-3DF	VGA registers
3E0-3EF	Available
3F0-3F7	Primary Floppy disk controller
3F8-3FF	Serial port 1
4D0	Master PIC Edge/Level Trigger register
4D1	Slave PIC Edge/Level Trigger register
CF8-CFB	PCI configuration address register (32 bit I/O only)
CF9	Reset Control register (8 bit I/O)
CFC-CFF	PCI configuration data register
F040	Smbus base address for SB.
500	GPIO Base Address for SB
400	PM (ACPI) Base Address for SB
460	Alias for PCH TCO base address.
0A00~0AFF	Reserved for SIO functions base address (ex: PME /GPIO etc)
200-23Fh	Reserved for ISA.
240-25Fh	Reserved for ISA.
280-28Fh	Reserved for ISA.
2A0-2DFh	Reserved for ISA.
300-33Fh	Reserved for ISA.
380-39Fh	Reserved for ISA.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

6.4. Interrupt Request (IRQ) Lines

PIC Mode

IRQ#	Typical Intterupt Resource	Connected to Pin	Available
0	Counter 0	N/A	No
1	Keyboard controller	IRQ1 vis SEIRQ	No
2	Cascade interrupt from slave PIC	N/A	No
3	Serial Port 2 (COM2) / PCI	IRQ3 via SERIRQ / PIRQ	Note (1)
4	Serial Port 1 (COM1) / PCI	IRQ4 via SERIRQ / PIRQ	Note (1)
5	Generic	IRQ5 via SERIRQ / PIRQ	Note (1)
6	Floppy Drive Controller	IRQ6 via SERIRQ / PIRQ	No
7	Generic	IRQ7 via SERIRQ / PIRQ	Note (1)
8	Real-time clock	N/A	No
9	Generic	IRQ9 via SERIRQ / PIRQ	Note (1)
10	Generic	IRQ10 via SERIRQ / PIRQ	Note (1)
11	Generic	IRQ11 via SERIRQ / PIRQ	Note (1)
12	PS/2 Mouse	IRQ12 via SERIRQ / PIRQ	Note (1)
13	Math Processor	N/A	No
14	Generic	IRQ14 via SERIRQ / PIRQ	Note (1)
15	Generic	IRQ15 via SERIRQ / PIRQ	Note (1)

Note (1): These IRQs can be used for PCI devices when onboard device is disabled.

APIC Mode

IRQ#	Typical Intterupt Resource	Connected to Pin	Available
0	Counter 0	N/A	No
1	Keyboard controller	N/A	No
2	Cascade interrupt from slave PIC	N/A	No
3	Serial Port 2 (COM2) / PCI	IRQ3 via SERIRQ / PIRQ	Note (1)
4	Serial Port 1 (COM1) / PCI	IRQ4 via SERIRQ / PIRQ	Note (1)
5	Generic	IRQ5 via SERIRQ / PIRQ	Note (1)
6	Floppy Drive Controller	IRQ6 via SERIRQ / PIRQ	No
7	Generic	IRQ7 via SERIRQ / PIRQ	Note (1)
8	Real-time clock	N/A	No
9	Generic	IRQ9 via SERIRQ / PIRQ	Note (1)
10	PCI	IRQ10 via SERIRQ / PIRQ	Note (1)
11	Ethernet Controller/SMBus Controller /ME/USB Controller	IRQ11 via SERIRQ / PIRQ	Note (1)
12	PS/2 Mouse	IRQ12 via SERIRQ / PIRQ	Note (1)
13	Math Processor	N/A	No
14	Generic	IRQ14 via SERIRQ / PIRQ	Note (1)
15	Generic	IRQ15 via SERIRQ / PIRQ	Note (1)
16	N/A	PCIE Port 0/1/2/3/4/5/6 UHCI Controller, xHCI Controller P.E.G Root Port, I.G.D	Note (1)
17	N/A	PCIE Port 0/1/2/3/4/5/6, P.E.G Root Port,	Note (1)
18	N/A	PCIE Port 0/1/2/3/4/5/6 UHCI Controller, P.E.G Root Port, SATA Host controller, SMBus Controller, Thermal Controller, EHCI Controller	Note (1)
19	N/A	PCIE Port 0/1/2/3/4/5/6 UHCI Controller, P.E.G Root Port, SATA Host controller, SATA Host controller	Note (1)

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

IRQ#	Typical Intterupt Resource	Connected to Pin	Available
20	N/A	PCH internal GBE controller	Note (1)
21	N/A	UHCI Controller 5	Note (1)
22	N/A	PCH HDA	Note (1)
23	N/A	UHCI Controller , EHCI Controller	Note (1)

Note (1): These IRQs can be used for PCI devices when onboard device is disabled. If IRQ is from ISA, user must reserve IRQ for ISA in BIOS setup menu.

6.5. PCI Configuration Space Map

Bus Number	Device Number	Function Number	Routing	Description
00h	1Fh	00h	Internal	LPC Interface Bridge
00h	1Fh	02h	Internal	SATA Controller #0
00h	1Fh	05h	Internal	SATA Controller #1
00h	1Fh	03h	Internal	SMBus Controller
00h	14h	00h	Internal	xHCI Controller
00	1Dh	00h	Internal	EHCI Controller #0
00	1Ah	00h	Internal	EHCI Controller #1
00	1Bh	00h	Internal	High Definition Audio
00	19h	00h	Internal	Gigabit LAN Controller
00	16h	00h	Internal	Management Engine
00h	1Ch	00h	Internal	PCIE Root Port #0
00h	1Ch	01h	Internal	PCIE Root Port #1
00h	1Ch	02h	Internal	PCIE Root Port #2
00h	1Ch	03h	Internal	PCIE Root Port #3
00h	1Ch	04h	Internal	PCIE Root Port #4
00h	1Ch	05h	Internal	PCIE Root Port #5
00h	1Ch	06h	Internal	PCIE Root Port #6
00h	00h	00h	N/A	Host Bridge
00h	02h	00h	Internal	I.G.F.X

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

6.6. PCI Interrupt Routing Map

INT Line	LPC Interface Bridge	SATA Controller #0	SATA Controller #1	SMBUS Controller	XHCI Controller	EHCI Controller #0	EHCI Controller #1	HD Audio	GbE Controller
Int0	INTF:21				INTA:16	INTH:23	INTA:16	INTG:22	INTE:20
Int1	INTD:19	INTD:19	INTD:19						
Int2	INTC:18			INTC:18					
Int3	INTA:16								

INT Line	Management Engine	PCIE Root Port#0	PCIE Root Port#1	PCIE Root Port#2	PCIE Root Port#3	PCIE Root Port#4	PCIE Root Port#5	PCIE Root Port#6	Host Bridge
Int0	INTA:16	INTA:16							
Int1	INTD:19	INTB:17							
Int2	INTC:18	INTC:18							
Int3	INTB:17	INTD:19							

INT Line	I.G.F.X								
Int0	INTA:16								
Int1									
Int2									
Int3									

6.7. SMBus Address Table

Device		Address
SO-DIMM	DIMM A	A0h
	DIMM B	A4h
Hardware Monitor	ADT7490	2Eh
Extend GPIO	PCA9535BS	40h

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7. BIOS Setup

The following chapter describes basic navigation for the AMIBIOS®EFI BIOS setup utility.

7.1. Starting the BIOS

To enter the setup screen, follow these steps:

1. Power on the motherboard
2. Press the < Delete > key on your keyboard when you see the following text prompt: < Press DEL to run Setup >
3. After you press the < Delete > key, the main BIOS setup menu displays. You can access the other setup screens from the main BIOS setup menu, such as Chipset and Power menus.



NOTE: In most cases, the < Delete > key is used to invoke the setup screen. There are several cases that use other keys, such as < F1 >, < F2 >, and so on.


Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.1.1. Setup Menu

The main BIOS setup menu is the first screen that you can navigate. Each main BIOS setup menu option is described in this user's guide.

The Main BIOS setup menu screen has two main frames. The left frame displays all the options that can be configured. "Grayed" options cannot be configured, "Blue" options can be.


The right frame displays the key legend. Above the key legend is an area reserved for a text message. When an option is selected in the left frame, it is highlighted in white. Often a text message will accompany it.

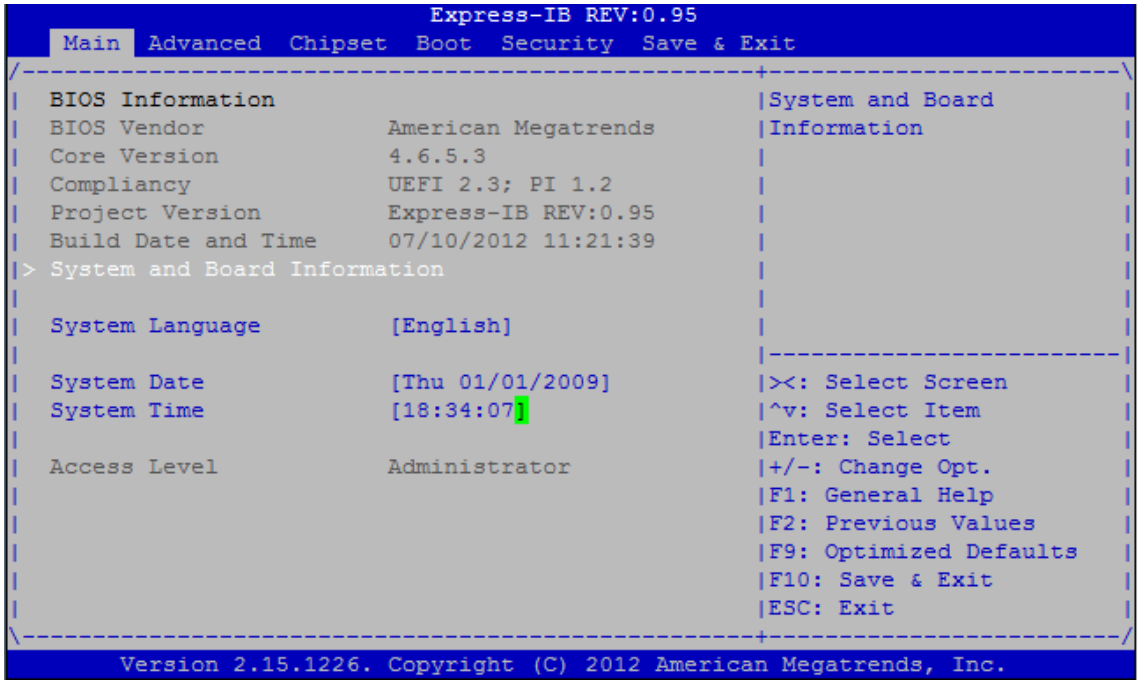

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.1.2. Navigation




The BIOS setup/utility uses a key-based navigation system called hot keys. Most of the BIOS setup utility hot keys can be used at any time during the setup navigation process. These keys include < F1 >, < F10 >, < Enter >, < ESC >, < Arrow > keys, and so on.

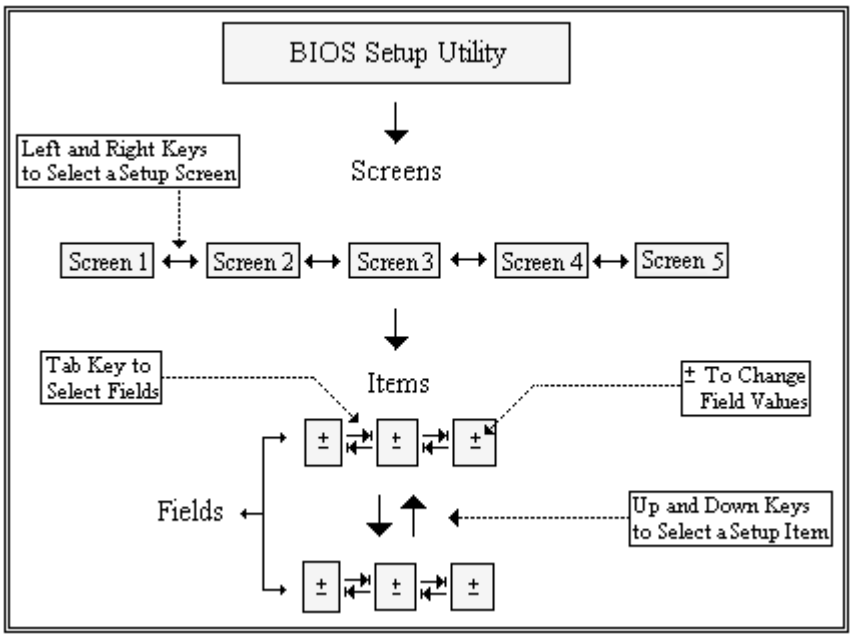



NOTE: There is a hot key legend located in the right frame on most setup screens.

→←	Left/Right. The *Left and Right* < Arrow > keys allow you to select a setup screen. For example: Main screen, Advanced screen, Chipset screen, and so on.
↑ ↓	Up/Down The *Up and Down* < Arrow > keys allow you to select a setup item or sub-screen.
+ -	Plus/Minus The *Plus and Minus* < Arrow > keys allow you to change the field value of a particular setup item. For example: Date and Time.
Tab	The < Tab > key allows you to select setup fields.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

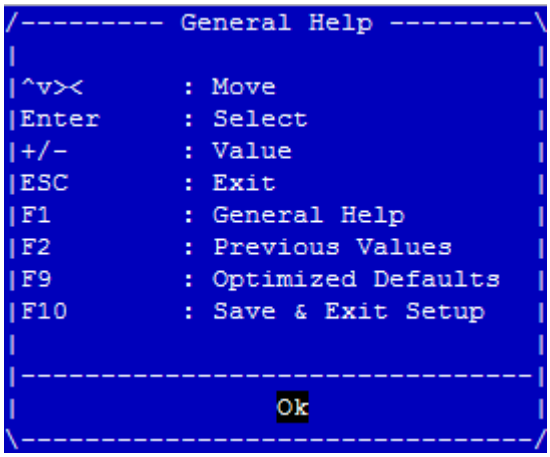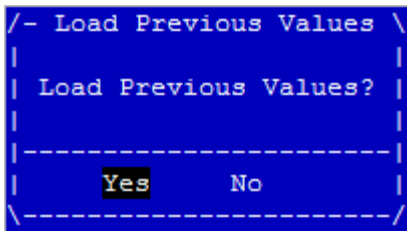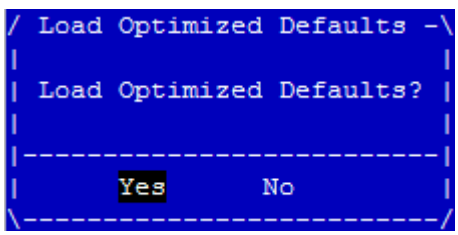
Hot Key	Description
Enter	The < Enter > key allows you to display or change the setup option listed for a particular setup item. The < Enter > key can also allow you to display the setup sub-screens.
F1	The < F1 > key allows you to display the *General Help screen*. Press the < F1 > key to open the *General Help screen*. 
F2	The < F2 > key on your keyboard is the previous values key. It is not displayed on the key legend by default. To set the previous values settings of the BIOS, press the < F2 > key on your keyboard. It is located on the upper row of a standard 101 keyboard. The previous values settings allow the motherboard to boot up with the least amount of options set. This can lessen the probability of conflicting settings.  Press the < Enter > key to load previous values. You can also use the < Arrow > key to select *Cancel* and then press the < Enter > key to abort this function and return to the previous screen.
F3	The < F3 > key on your keyboard is the optimized defaults key. To set the optimized defaults settings of the BIOS, press the < F3 > key on your keyboard. It is located on the upper row of a standard 101 keyboard. The optimized defaults settings allow the motherboard to boot up with the optimized defaults of options set. This can lessen the probability of conflicting settings.  Press the < Enter > key to load optimized defaults. You can also use the < Arrow > key to select *Cancel* and then press the < Enter > key to abort this function and return to the previous screen.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

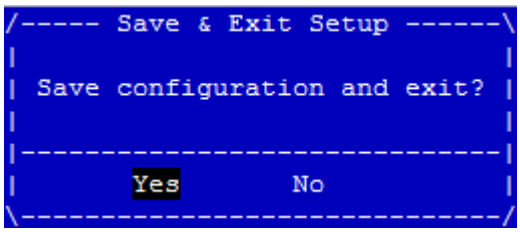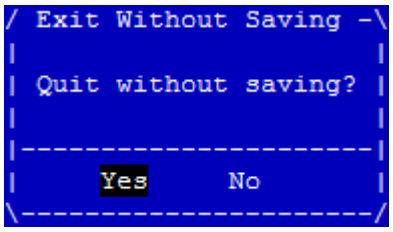F4	The < F4 > key allows you to save any changes you have made and exit Setup. Press the < F4 > key to save your changes. The following screen will appear:  Press the < Enter > key to save the configuration and exit. You can also use the < Arrow > key to select *Cancel* and then press the < Enter > key to abort this function and return to the previous screen.
ESC	The < Esc > key allows you to discard any changes you have made and exit the Setup. Press the < Esc > key to exit the setup without saving your changes. The following screen will appear:  Press the < Enter > key to discard changes and exit. You can also use the < Arrow > key to select *Cancel* and then press the < Enter > key to abort this function and return to the previous screen.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.2. Main Setup

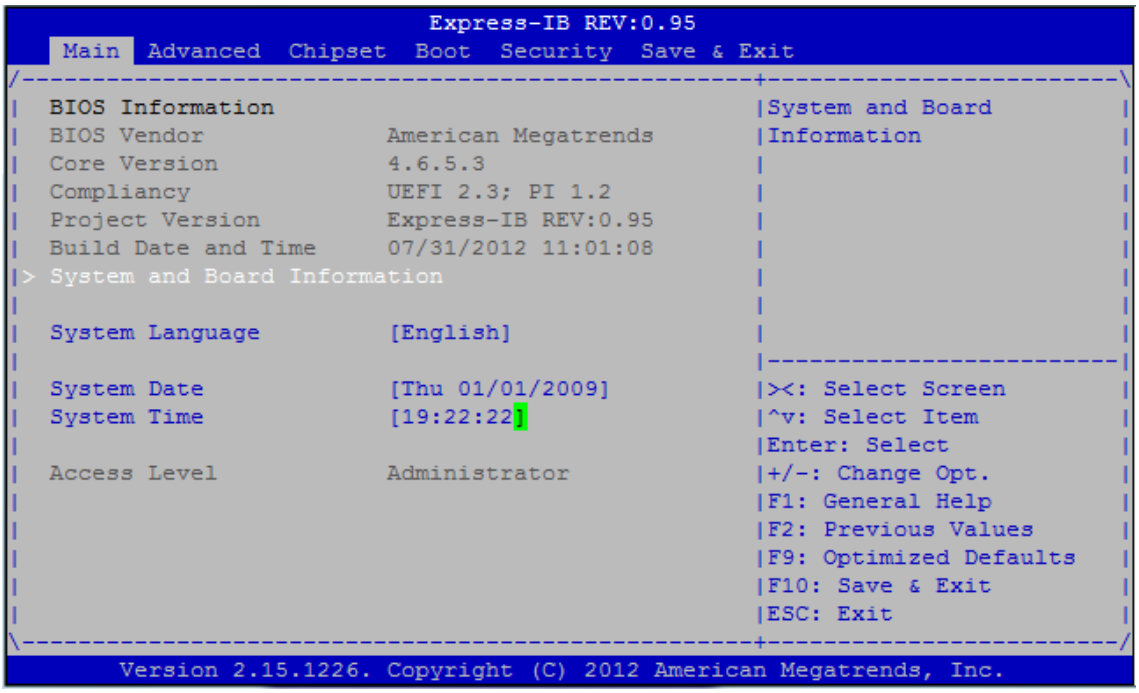

System & Board Info

The Main BIOS setup screen reports board information.

- Project Version
  Displays the current BIOS version.
- Build Data
  Displays the BIOS build data.

System Date/System Time


Use this option to change the system time and date. Highlight *System Time* or *System Date* using the < `Arrow` > keys. Enter new values using the keyboard. Press the < `Tab` > key or the < `Arrow` > keys to move between fields. The date must be entered in MM/DD/YY format. The time is entered in HH:MM:SS format.

NOTE:


The time is in 24-hour format. For example, 5:30 A.M. appears as 05:30:00, and 5:30 P.M. as 17:30:00.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.3. Advanced Setup

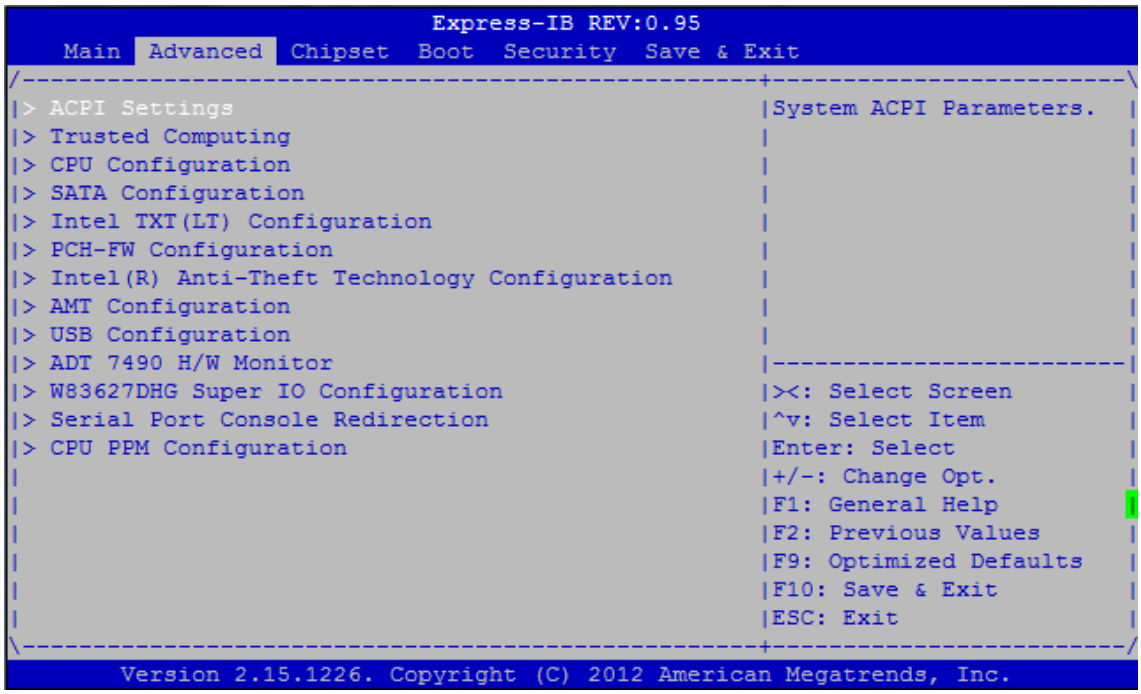

7.3.1. ACPI Settings

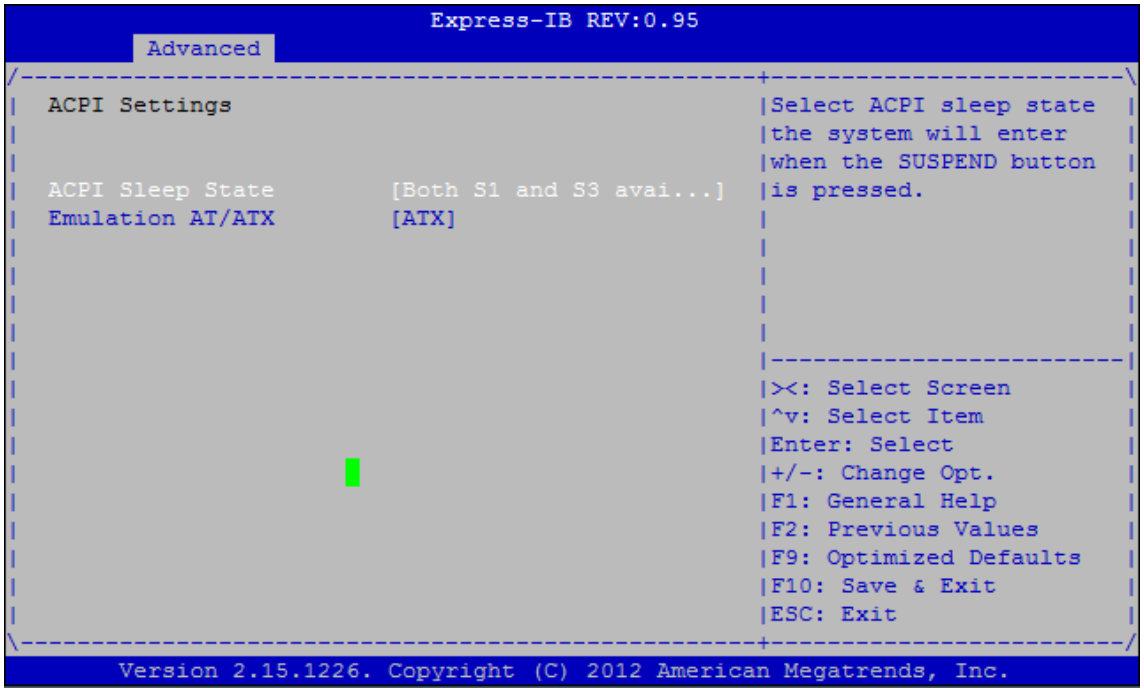

ACPI Sleep State


Select the highest ACPI sleep state the system will enter, when the SUSPEND button is pressed

Emulation AT/ATX

Select Emulation AT or ATX function.If this option set to [Emulation AT], BIOS will report no suspend functions to ACPI OS. In Windows XP, it will make the OS show a shutdown message during system shutdown.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.3.2. Trusted Computing

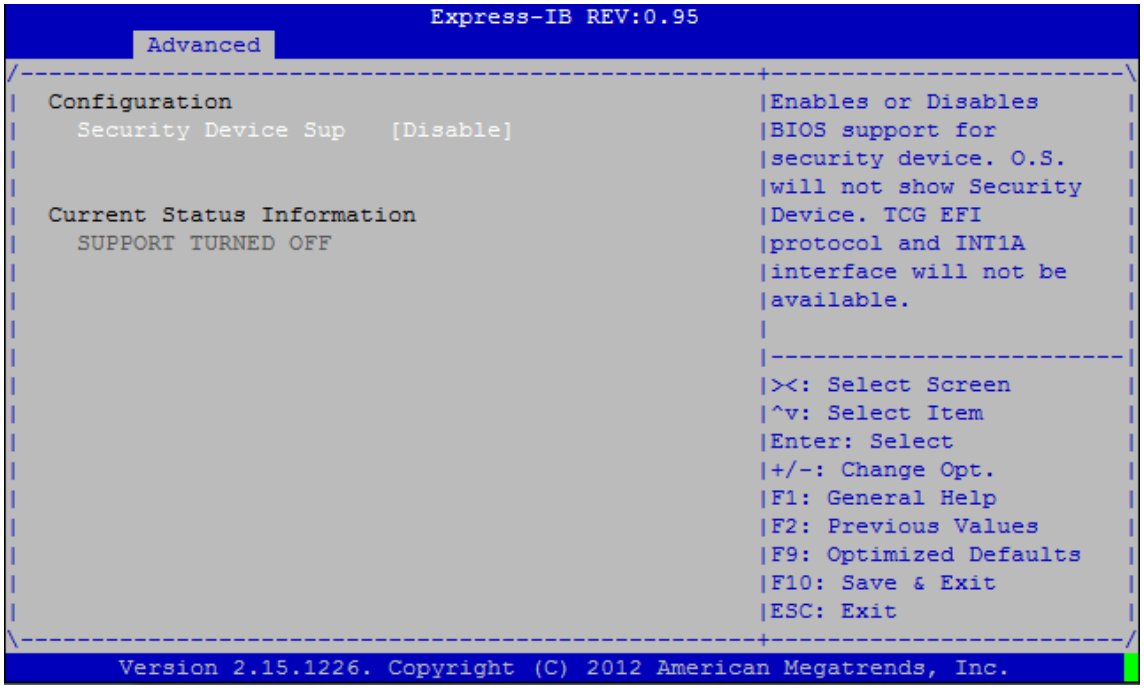


Security Device Support

Enables or Disables BIOS support for security device. OS will not show Security Device.TCG EFI protocol and INT1A interface will not be available.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.3.3. CPU Configuration

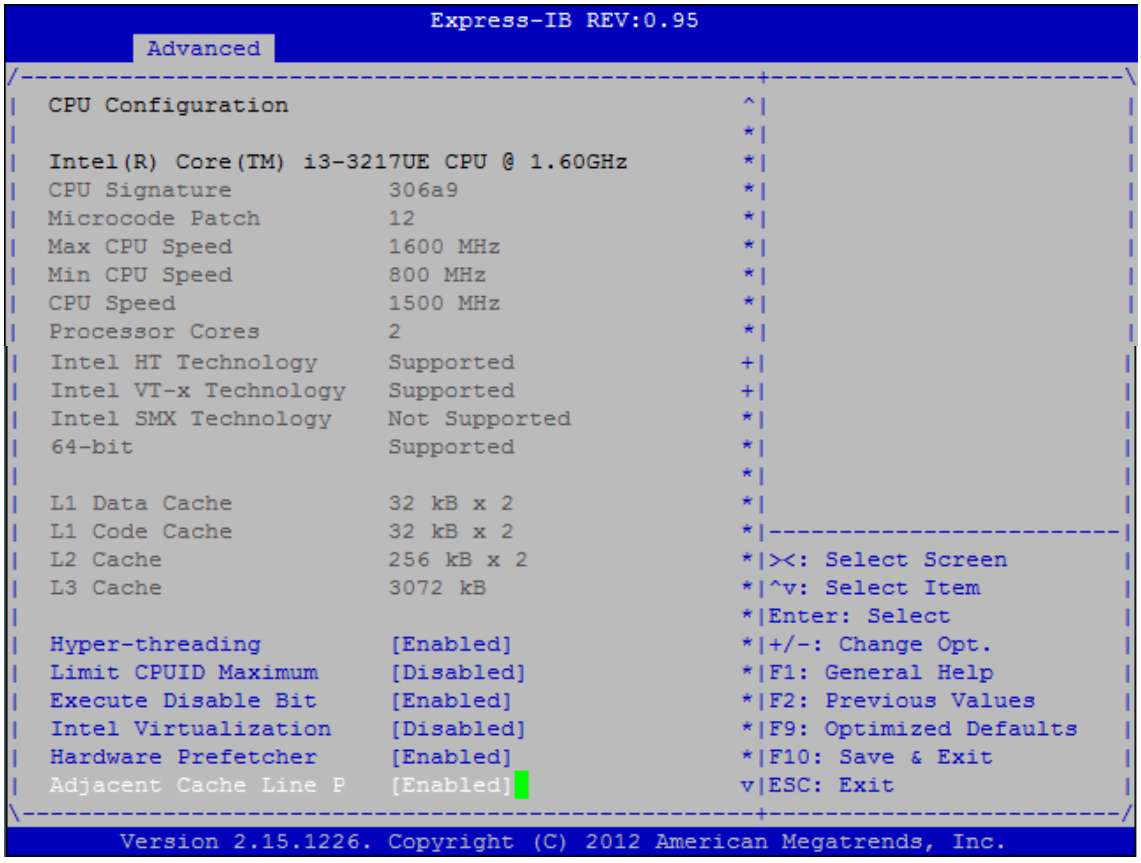

Hyper-threading

Enabled for Windows XP and Linux (OS optimized for Hyper-Threading Technology) and Disabled for other OS (OS not optimized for Hyper-Threading Technology). When disabled, only one thread per enabled core is enabled.

Limit CPUID Maximum

Disabled for Windows XP.

Execute Disable Bit

XD can prevent certain classes of malicious buffer overflow attacks when combined with a supporting OS (Windows Server 2003 SP1, Windows XP SP2, SuSE Linux 9.2, Red Hat Enterprise 3 Update 3.)

Intel Virtualization

When enabled, a VMM can utilize the additional hardware capabilities provided by Vanderpool Technology.

Hardware Prefetcher


To turn on/off the Mid Level Cache (L2) streamer prefetcher.

Adjacent Cache Line Prefetch

To turn on/off prefetching of adjacent cache lines. Enable or Disable Enhanced C3 state. Set this value to Enabled/Disabled.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.3.4. SATA Configuration

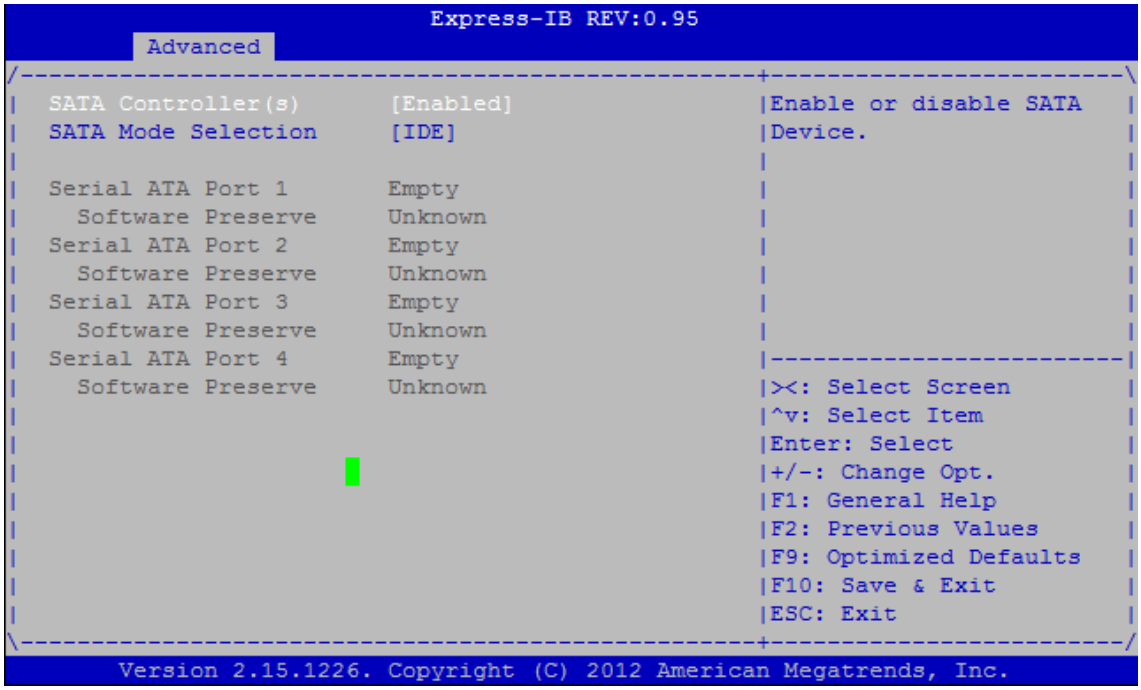


SATA Controller(s)

Enables or disable SATA Device.

SATA Mode Selection


Determines how SATA controller(s) operate.

7.3.5. Intel TXT(LT) Configuration

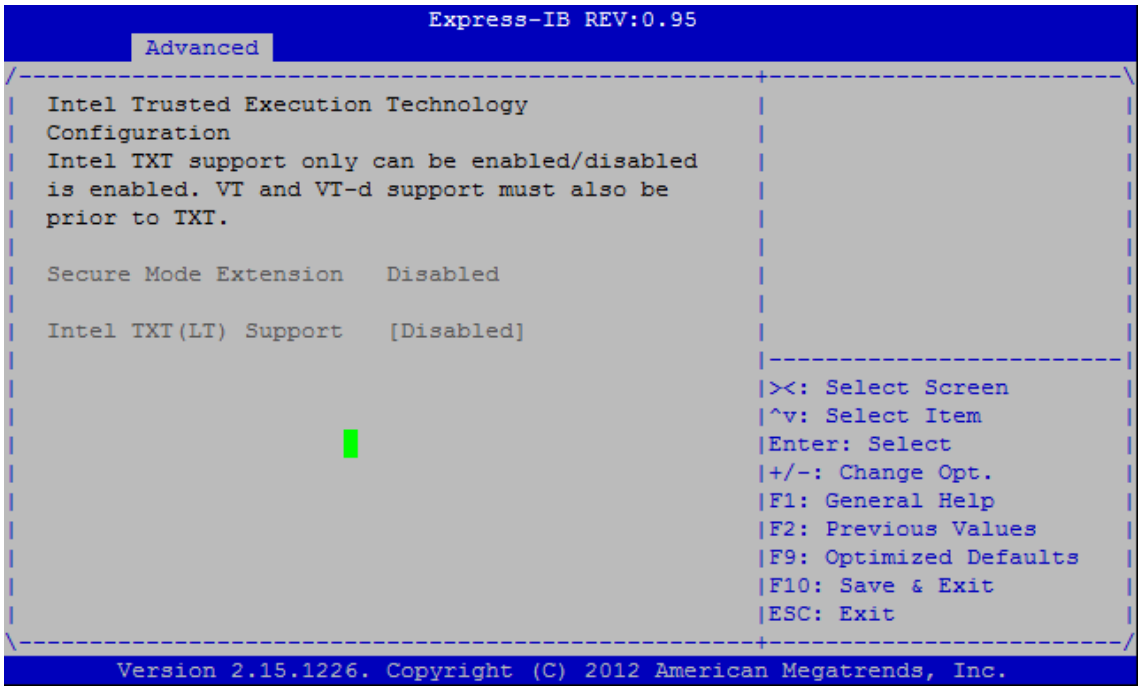

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.3.6. PCH-FW Configuration

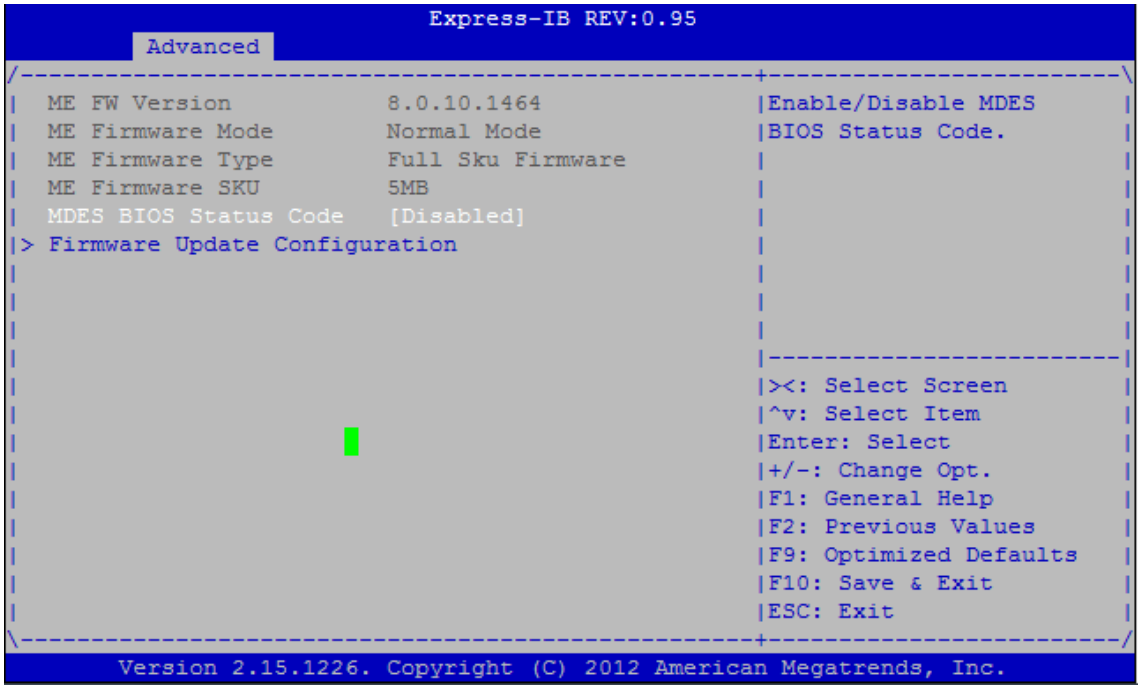

MDES BIOS Status Code


Enable/Disable MDES BIOS Status Code.

Firmware Update Configuration

Configure Management Engine Technology Parameters.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.3.7. Intel Anti-Theft Technology Configuration

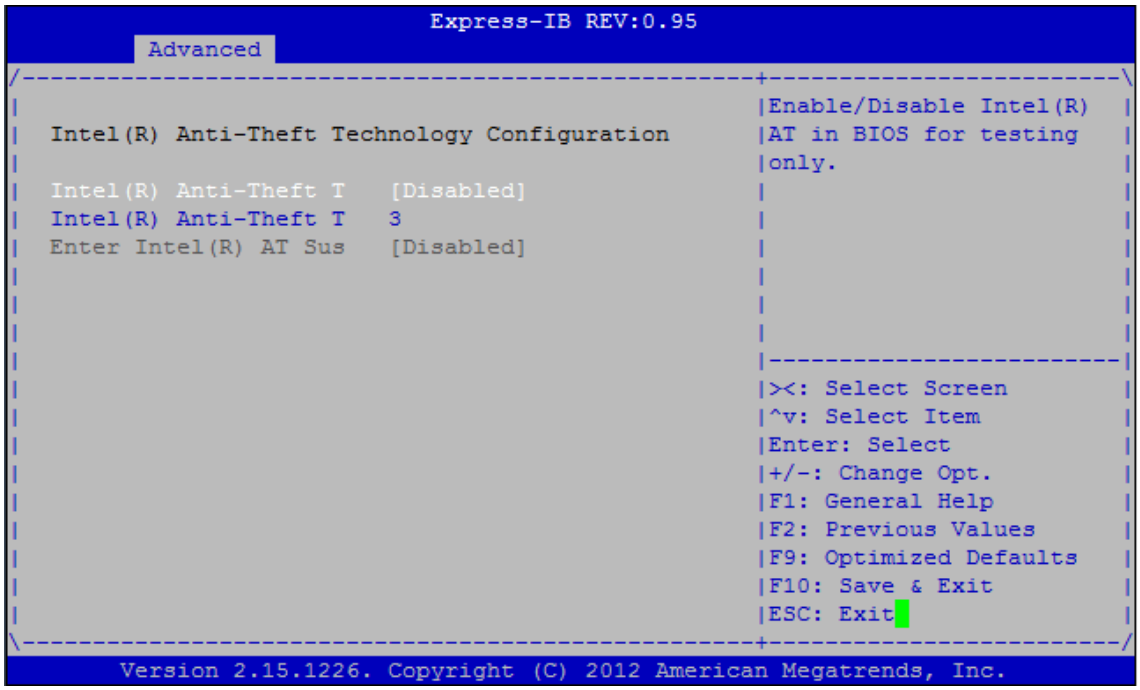

Intel(R) Anti-Theft Technology


Enable/Disable Intel(R) AT in BIOS for testing only.

Intel(R) Anti-Theft Technology Rec 3

Set the number of times Recovery attemped will be allowed.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.3.8. AMT Configuration

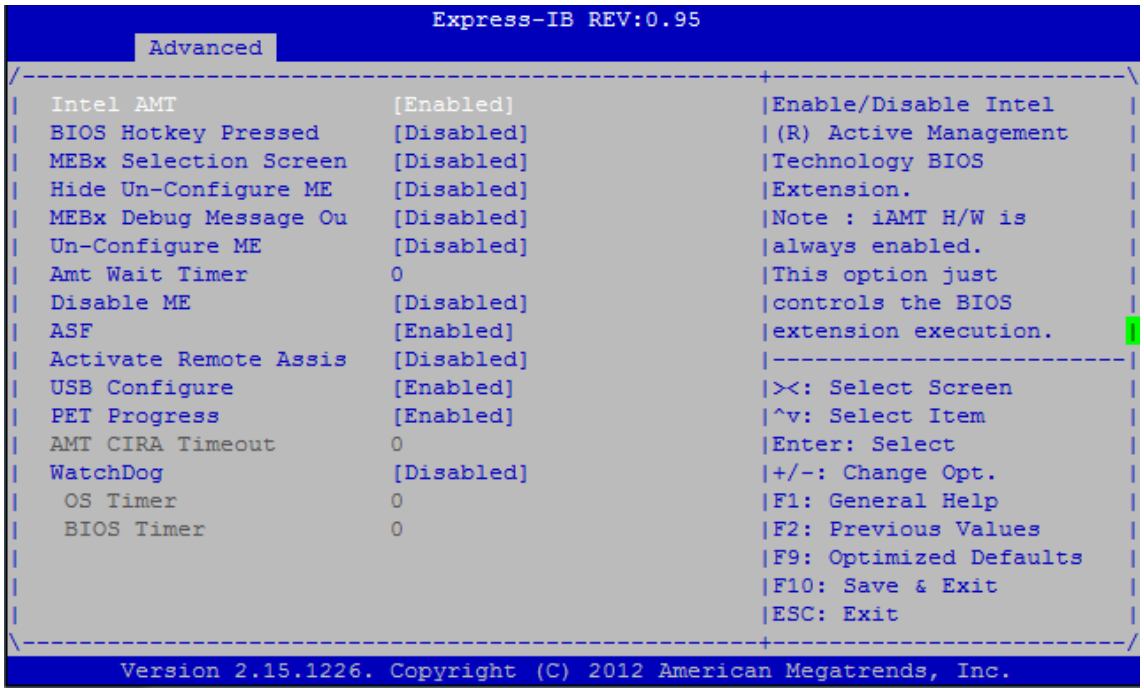

Intel AMT

Enable/Disable Intel Active Management Technology BIOS Extension. Note: iAMT H/W is always enabled. This option just controls the BIOS extension execution. If enabled, this requires additional firmware in the SPI device

BIOS Hotkey Pressed

OEMFlag Bit 1: Enable/Disable BIOS hotkey press.

MEBx Selection Screen

OEMFlag Bit 2: Enable/Disable MEBX selection screen.

Hiden Un-Configure ME Confirmation

OEMFlag Bit 6: Hide Un-Configure ME without password Confirmation Prompt

MEBX Debug Message Output

OEMFlag Bit 14: Enable MEBX debug message output.

Un-Configure ME

OEMFlag Bit 15: Un-Configure ME without password.

Amt Wait Timer

Set timer to wait before sending ASF_GET_BOOT_OPTIONS.

Disable ME

Set ME to Soft Temporary Disabled.

ASF

Enable/Disable Alert Specification Format.

Activate Remote Assistance Process

Trigger CIRA boot.

USB Configure

Enable/Disable USB Configure function.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


PET Progress

User can Enable/Disable PET Events progress to receive PET event or not.

WatchDog

Enable/Disable WatchDog Timer.

7.3.9. USB Configuration

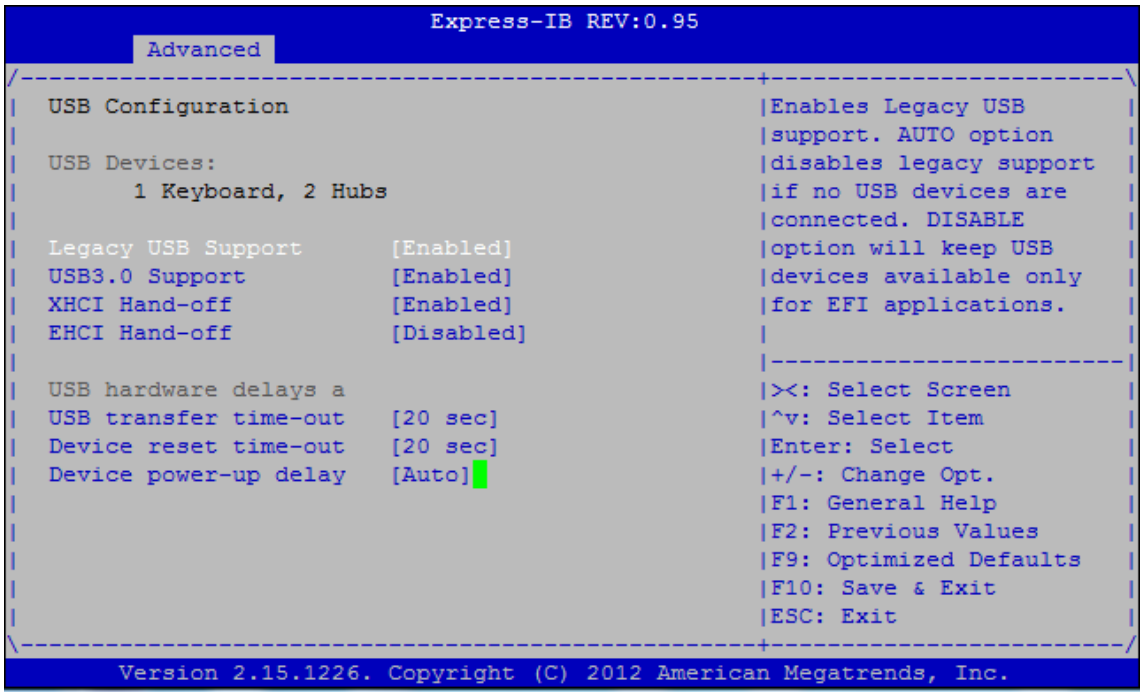

Legacy USB Support

Enables Legacy USB support. AUTO option, disables legacy support if no USB devices are connected. DISABLE option will keep USB devices available only for EFI applications.

USB3.0 Support

Enable/Disable USB3.0(XHCI) Controller support.

XHCI Hand-off

This is a workaround for OSes without XHCI hand-off support. The XHCI ownership change should be claimed by XHCI driver.

EHCI Hand-off

This is a workaround for OSes without EHCI hand-off support. The EHCI ownership change should be claimed by EHCI driver.

USB transfer time-out

The time-out value for Control, Bulk, and Interrupt transfers.

Device reset time-out


USB mass storage device Start Unit command time-out.

Device power-up delay

Maximum time the device will take before it properly reports itself to the Host Controller. 'Auto' uses default value: for a Root port it is 100 ms, for a Hub port the delay is taken from Hub descriptor.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


7.3.10. ADT 7490 H/W Monitor

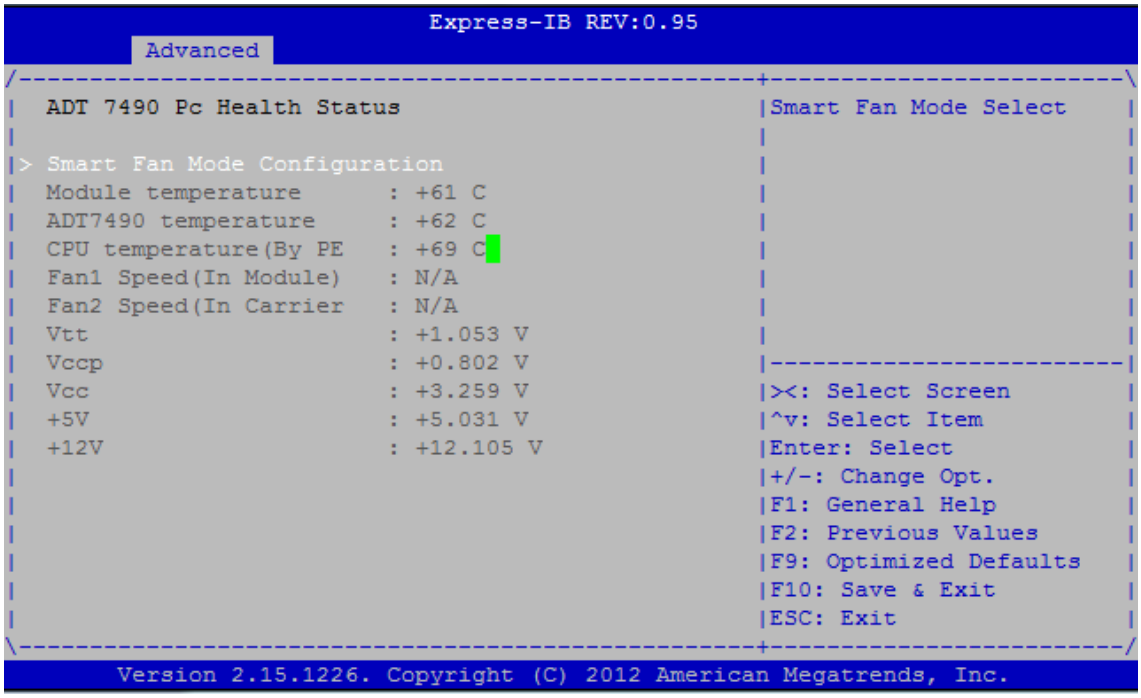

Smart Fan Mode Configuration

Smart Fan Mode Select.

7.3.11. W8362DHG Super IO Configuration

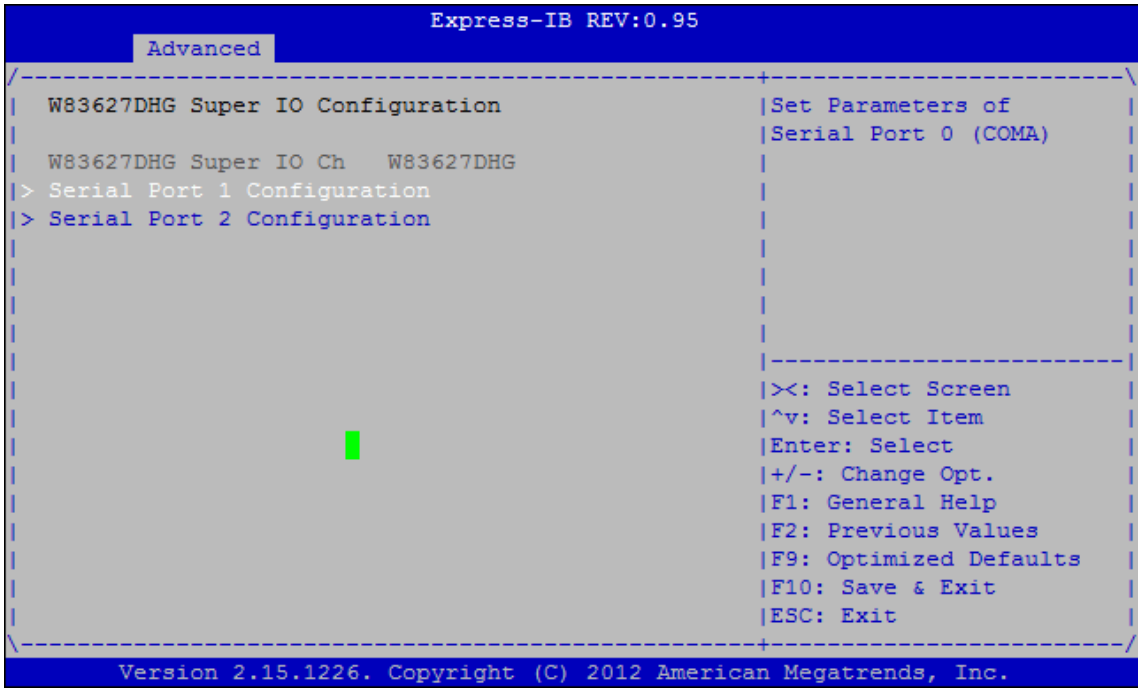

Serial Port 1 Configuration


Set Parameters of Serial Port 0 (COMA)

Serial Port 2 Configuration

Set Parameters of Serial Port 0 (COMA)

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.3.12. Serial Port Console Redirection

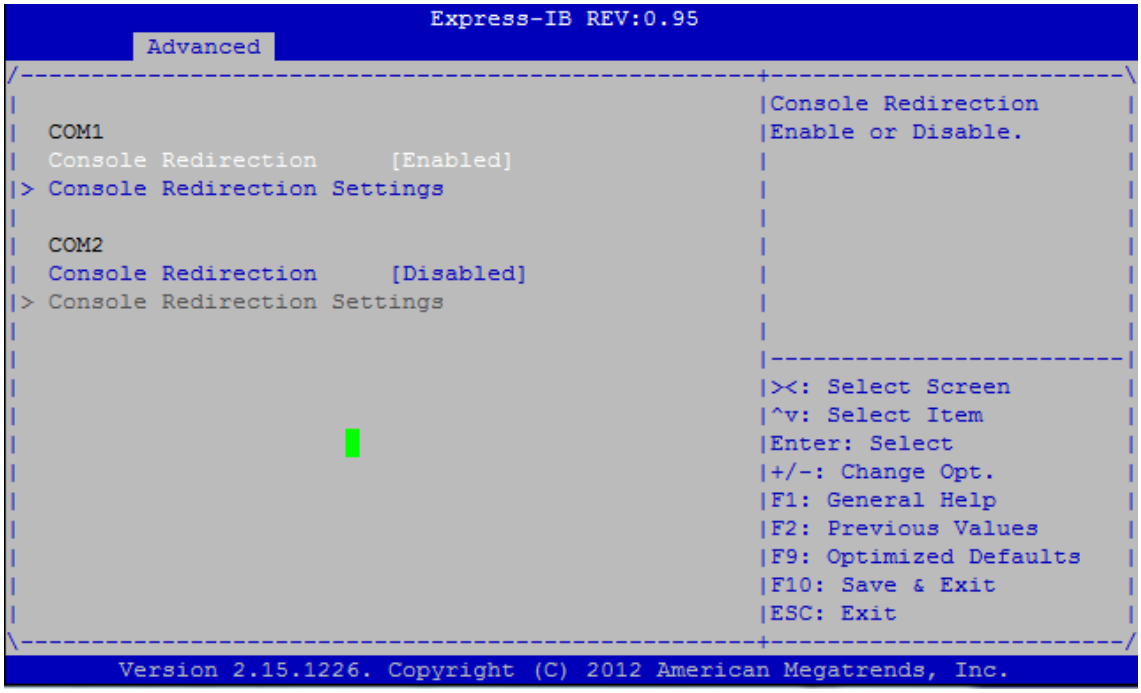

Console Redirection


Console Redirection Enable or Disable.

Console Redirection Setttings

The settings specify how the host computer and the remote computer (which the user is using) will exchange data. Both computers should have the same or compatible settings.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.3.13. CPU PPM Configuration

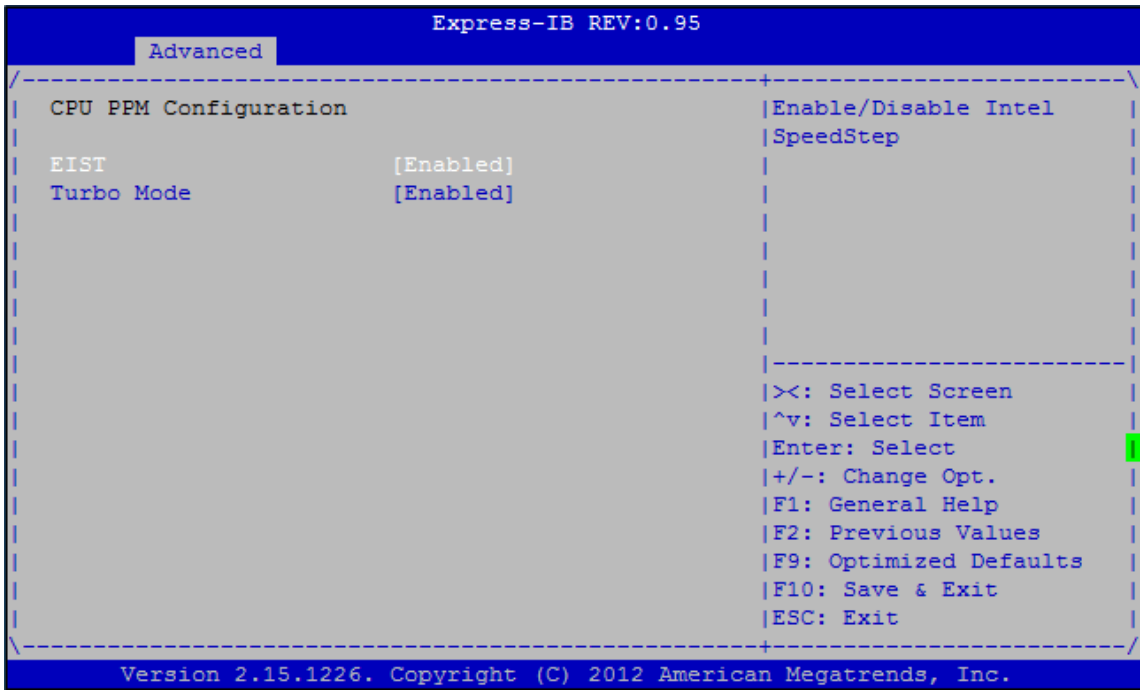

EIST


Enable/Disable Intel SpeedStep

Turbo Mode


Turbo Mode.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.4. Chipset Setup

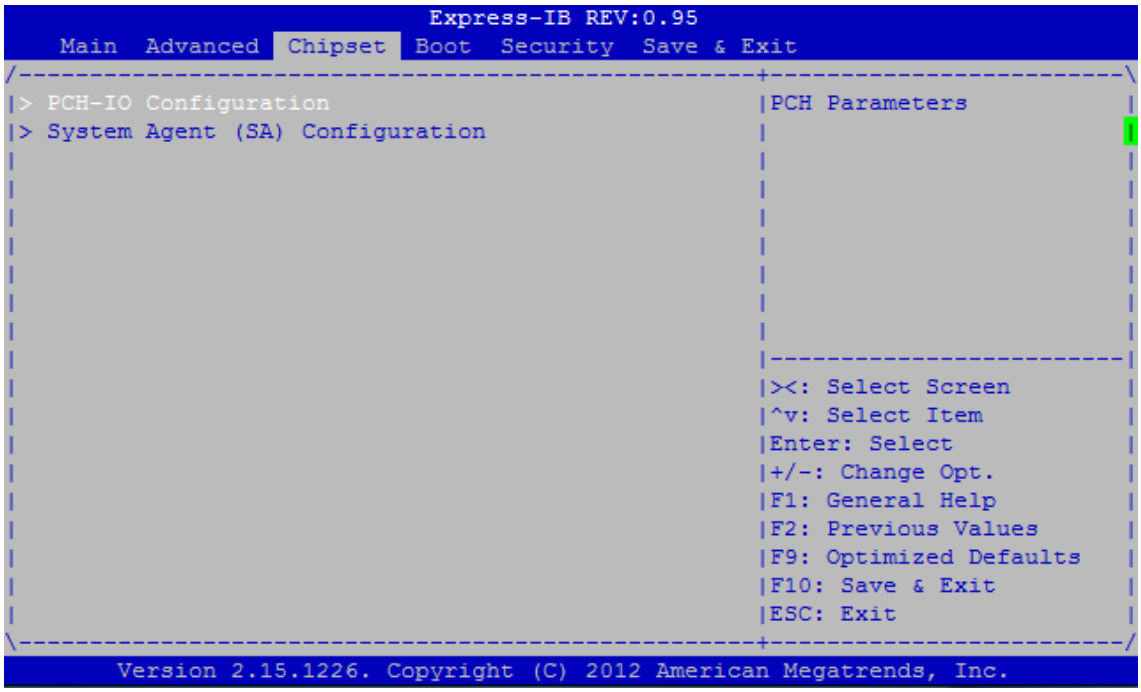


7.4.1. PCH-IO Configuration

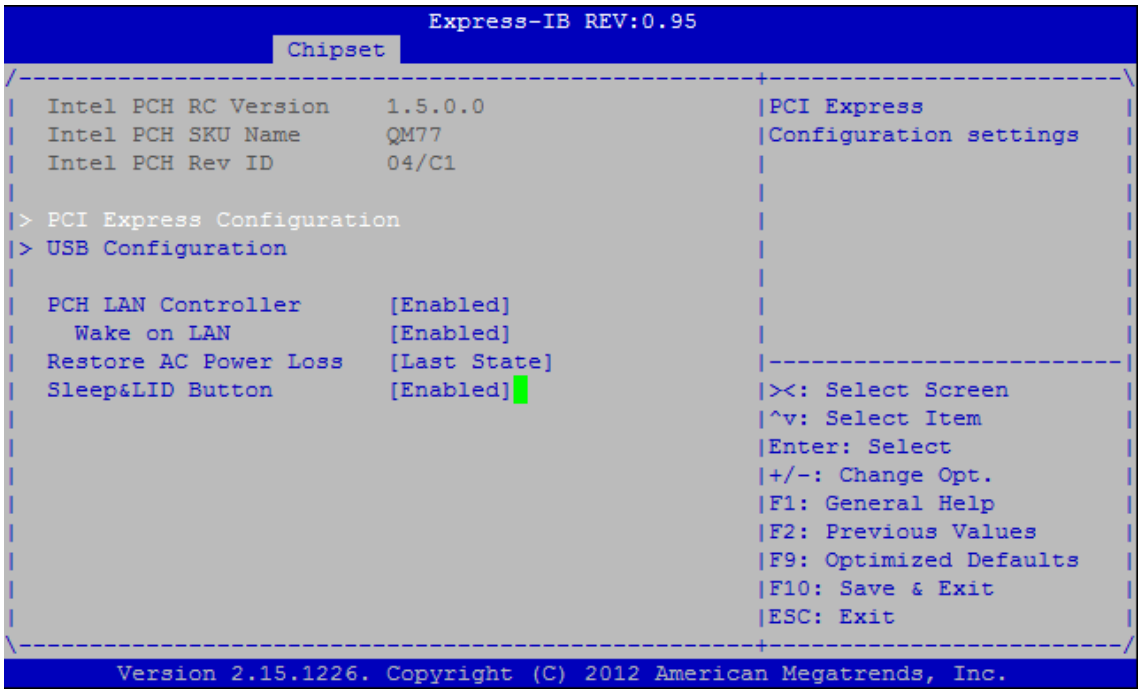

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

PCI Express Configuration

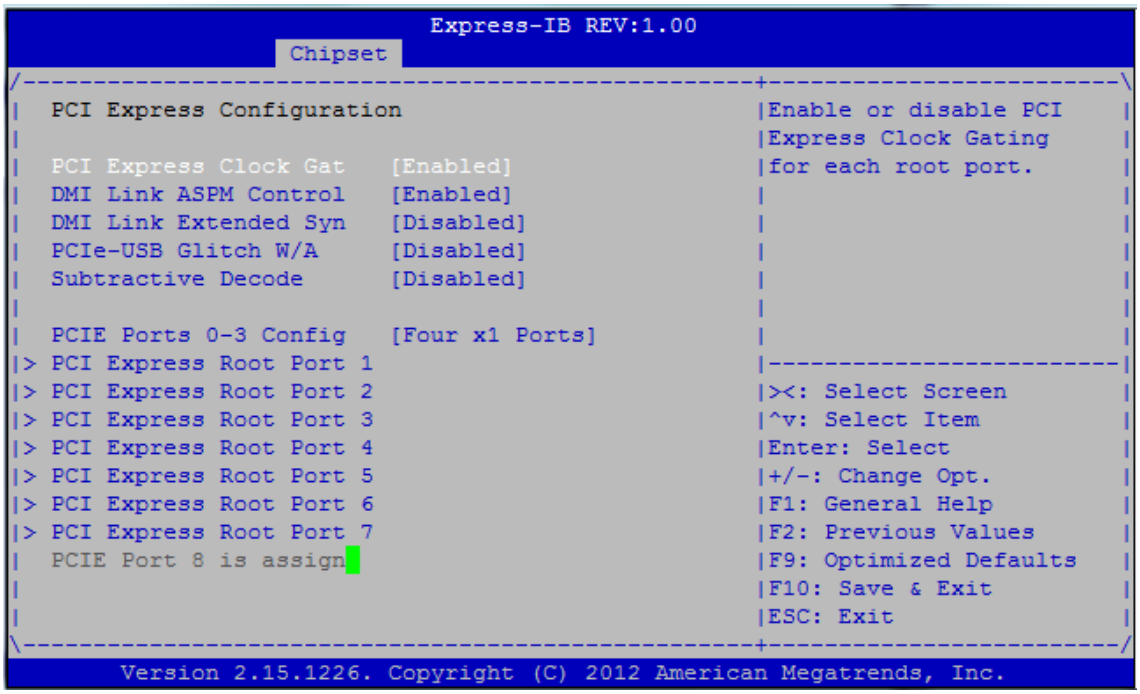

PCI Express Clock Gat

Enable or disable PCI Express Clock Gating for each root port.

DMI Link ASPM Control

The control of Active State Power Management on both NB side and SB side of the DMI Link.

DMI Link Etended Syn

The control of Extended Synch on SB side of the DMI Link.

PCIe-USB Glitch W/A

PCIe-USB Glitch W/A for bad USB device(s) connected behind PCIE/PEG Port.

Subtractive Decode

Enable or disable PCI Express Subtractive Decode

PCIE Ports 0-3 Config


To configure PCIe Port 0-3 of the PCH as four x1 slots or one x4 slot.
Procedure: 1. Change the option and press F4 or F10 to leave. 2. Wait for the system to auto issue 2 times global reset, then functioning port is ready.

PCI Express Root Port 1/2/3/4/5/6/7

PCE Express Root Port 1/2/3/4/5/6/7 Settings.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

USB Configuration

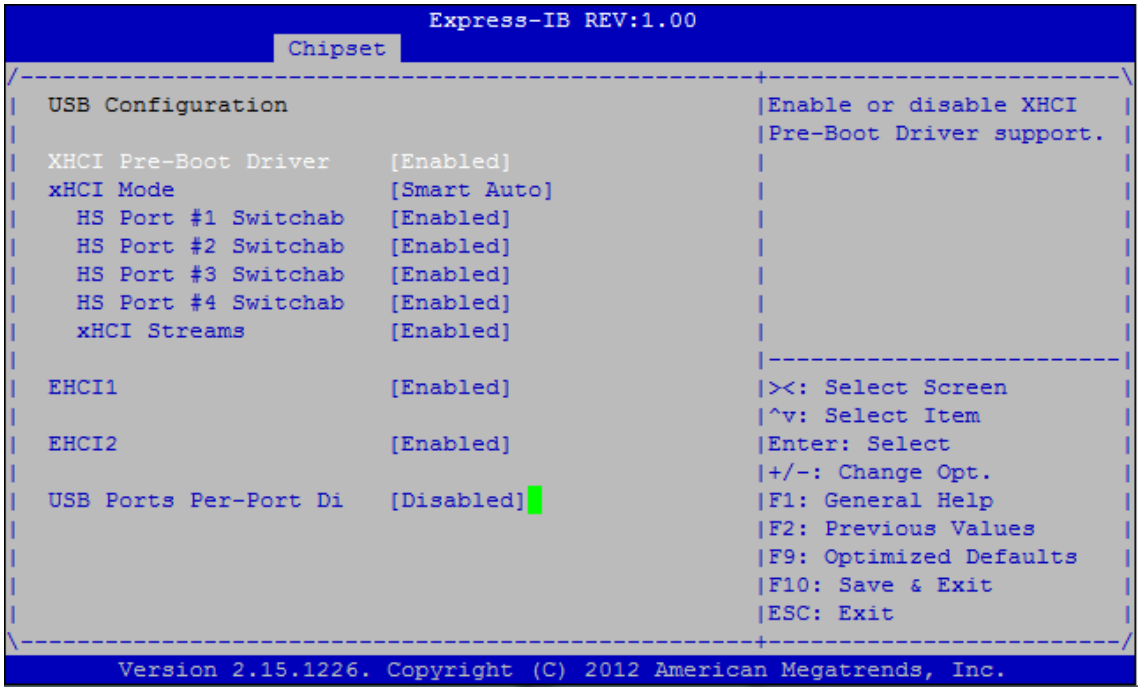

XHCI Pre-Boot Driver

Enable or disable xHCI Pre-Boot Driver support.

xHCI Mode

Mode of operation of XHCI Controller.

HS Port #1/2/3 Switchable

Allows for HS port switching between xHCI and EHCI.\n\nIf disabled, port is routed to EHCI.\n\nIf HS port is routed to xHCI, the corresponding SS port is enabled.

xHCI Streams

Enable or disable xHCI Maximum Primary Stream Array Size.

EHCI1/2


Control the USB EHCI (USB 2.0) functions. One EHCI controller must always be enabled.

USB Ports Per-Port Disable


Control each of the USB ports (0~13) disabling.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.4.2. System Agent (SA) Configuration

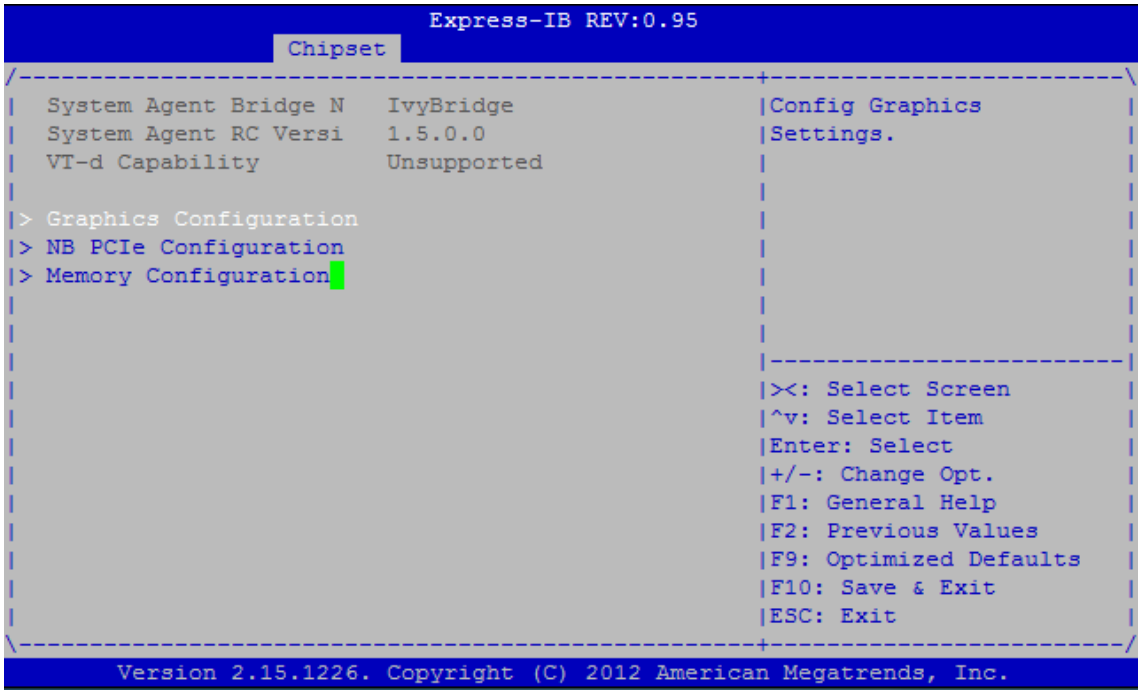

Graphics Configuration

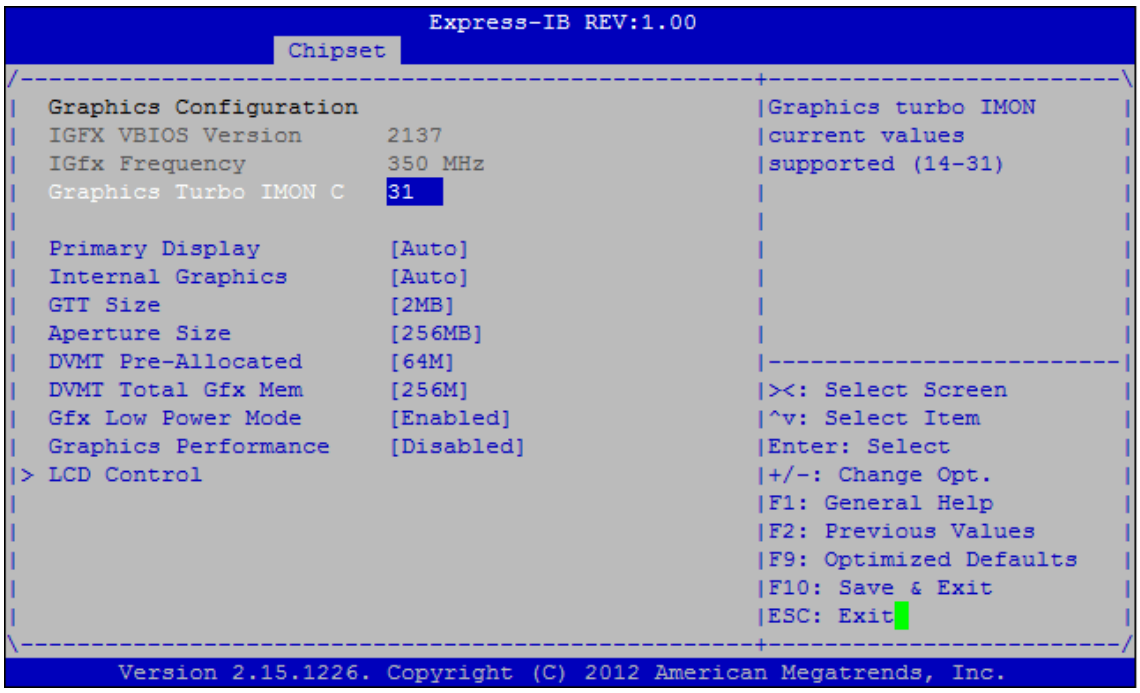

Graphics Turbo IMON Current

Graphics turbo IMON current values supported (14-31)

Primary Display

Select which of IGFX/PEG/PCI Graphics device should be Primary Display, or select SG for Switchable Gfx.

Internal Graphics

Keep IGD enabled based on the setup options.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

GTT Size

Select the GTT Size

Aperture Size

Select the Aperture Size

DVMT Pre-Allocated

Select DVMT 5.0 Pre-Allocated (Fixed) Graphics Memory size used by the Internal Graphics Device.

DVMT Total Gfx Mem

Select DVMT5.0 Total Graphic Memory size used by the Internal Graphics Device.


Gfx Low Power Mode

This option is applicable for SFF only.

Graphics Performance

Enable or disable Intel Graphics Performance Analyzers Counters.

LCD Control

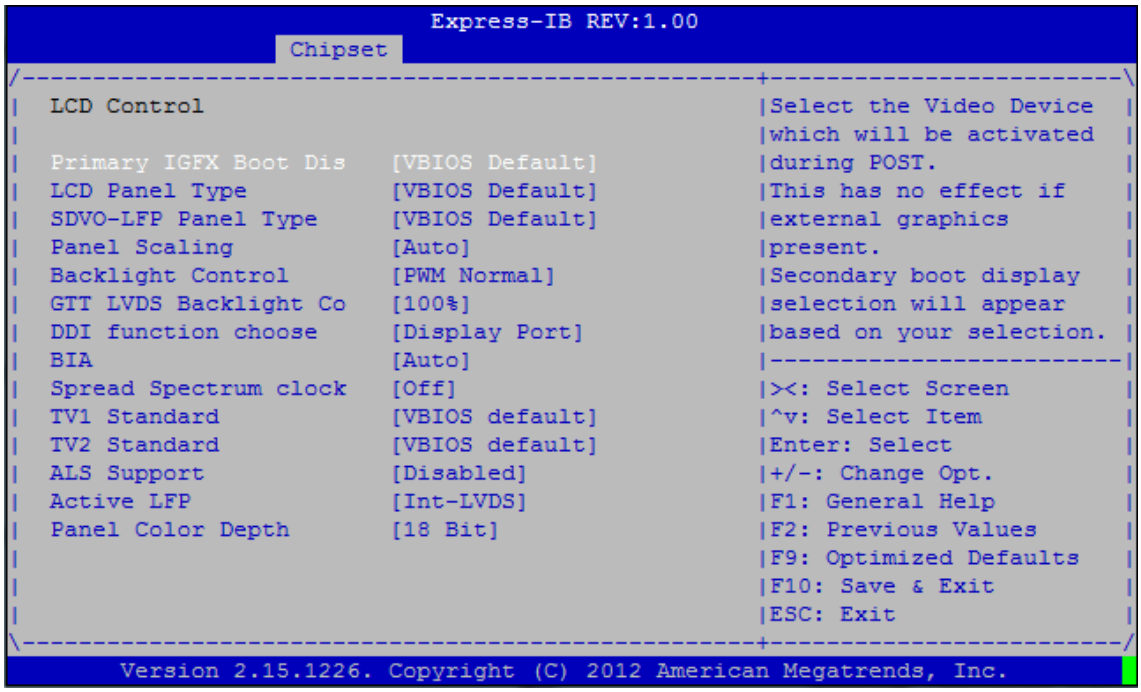

Primary IGFX Boot Display

Select the Video Device which will be activated during POST. This has no effect if external graphics is present. Secondary boot display selection will appear based on your selection. VGA modes will be supported only on primary display

LCD Panel Type

Select LCD panel used by Internal Graphics Device by selecting the appropriate setup item.

SDVO-LFP Panel Type

Select SDVO panel used by Internal Graphics Device by selecting the appropriate setup item.

Panel Scaling

Select the LCD panel scaling option used by the Internal Graphics Device.

Backlight Control

Back Light Control Setting

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

GTT LVDS Backlight Control

GTT LVDS Backlight Control. Note: This setting will be reset by the Graphics Driver.

DDI function choose

DDI function set to Display Port or HDMI.

BIA

Auto: GMCH use VBT default. Level n: Enabled with selected aggressiveness level.

Spread Spectrum clock

Hardware: Spread is controlled by chip. Software: Spread is controlled by BIOS.

TV1 Standard

Select the ability to configure a TV Format

TV2 Standard

Select the ability to configure a TV Minor Format

ALS Support

Valid only for ACPI. Legacy = ALS Support through the IGD INT10 function. ACPI = ALS support through an ACPI ALS driver.


Active LFP

Select the Active LFP Configuration. No LVDS: VBIOS does not enable LVDS. Int-LVDS: VBIOS enables LVDS driver by Integrated encoder. SDVO LVDS: VBIOS enables LVDS driver by SDVO encoder. eDP Port-A: LFP Driven by Int-DisplayPort encoder from Port-A. eDP Port-D: LFP Driven by Int-DisplayPort encoder from Port-D (through PCH).

Panel Color Depth

Select the LFP Panel Color Depth

NB PCIe Configuration

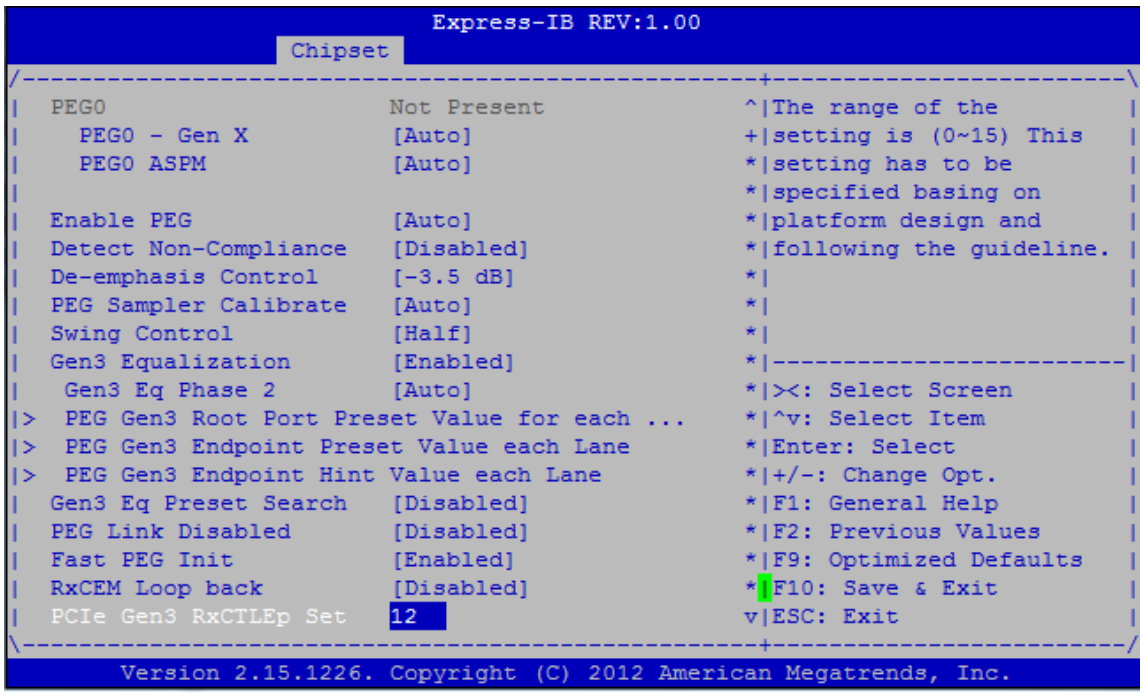

PEG0 – Gen X

Configure PEG0 B0:D1:F0 Gen1-Gen3

PEG0 ASPM

Control ASPM support for the PEG: Device1 Function 0.This has no effect if PEG is not the currently active device.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Enable PEG

Enable or disable the PEG.

Detect Non-Compliance

Detect Non-Compliant PCI Express Device in PEG.

De-emphasis Control

Configure the De-emphasis control on PEG

PEG Sampler Calibrate

Enable or disable PEG Sampler Calibrate. Auto means Disabled for SNB MB/DT, Enabled for IVB A0 B0.

Swing Control

Perform PEG Swing Control, on IVB C0 and later.

Gen3 Equalization

Perform PEG Gen3 Equalization steps.

Gen3 Eq phase 2

Perform PEG Gen3 Equalization Phase 2

PEG Gen3 Root Port Preset Value for each Lane

Root Port Preset Value Per lane for Gen3 Equalization.

PEG Gen3 Endpoint Preset Value each Lane

Endpoint Preset Value Per lane for Gen3 Equalization.

PEG Gen3 Endpoint Hint Value each Lane

Endpoint Hint Value Per lane for Gen3 Equalization.

Gen3 Eq Preset Searh

Perform PEG Gen3 Preset Search algorithm, on IVB C0 and later.

PEG Link Disabled

Enable or disable PCIe link disable mechanism for additional power saving.

Fast PEG Init

Enable or disable Fast PEG Init, Some optimization if no PEG devices present in cold boot.

RxCEM Loop back


Enable or disable RxCEM Loop back.

PCIe Gen3 RxCTLEp Set

The range of the setting is (0~15) This setting has to be specified based on platform design and following the guideline.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Memory Configuration

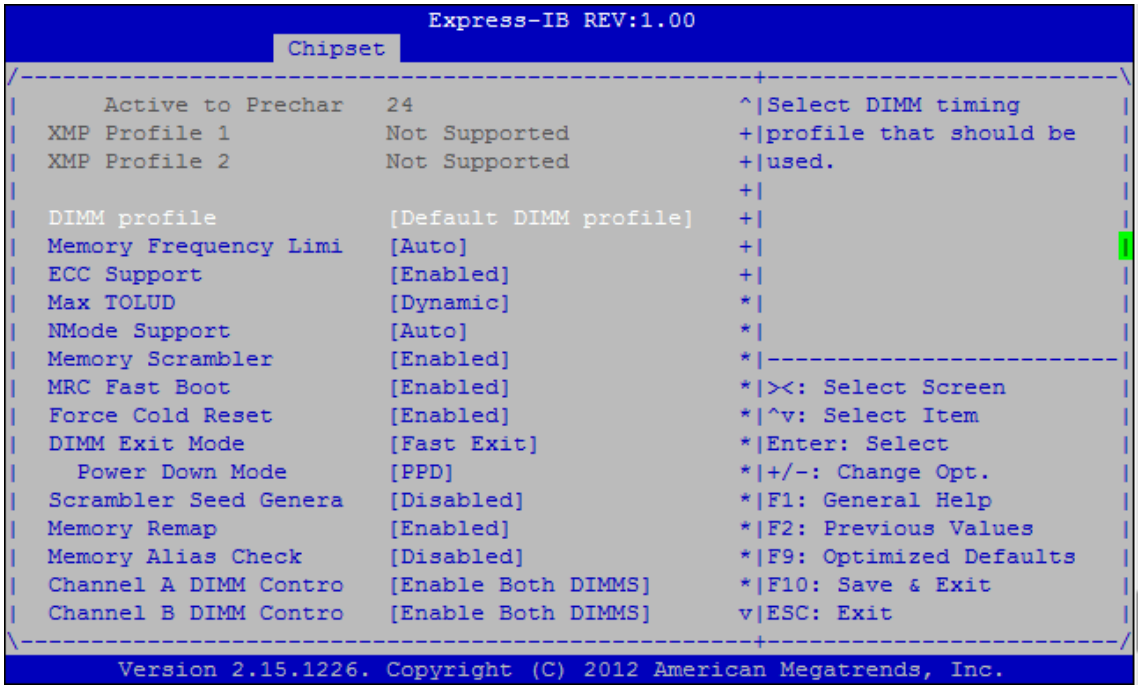

DIMM profile

Select DIMM timing profile that should be used.

Memory Frequency Limiter

Maximum Memory Frequency Selections in MHz.

ECC Support

Enable or disable DDR ECC Support.

Max TOLUD

Maximum Value of TOLUD. Dynamic assignment would adjust TOLUD automatically based on largest MMIO length of installed graphic controller.

NMode Support

NMode support option.

Memory Scrambler

Enable or disable Memory Scrambler support.

MRC Fast Boot

Enable or disable MRC fast boot.

Force Cold Reset

Force cold reset or choose MRC cold reset mode, when cold boot is required during MRC execution. Note: If ME 5.0MB is present, force cold reset is required!

DIMM Exit Mode

DIMM Exit Mode control

Power Down Mode

Power Down Mode control.

Scrambler Seed Generation off

Control Memory Scrambler Seed Generation. Enable - do not generate scrambler seed. Disable - Generate scrambler seed always.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Memory Remap

Enable or disable memory remap above 4G.

Memory Alias Check

Enable or disable memory Alias Check.

Channel A DIMM Control


Enable or disable DIMMs on Channel A.

Channel B DIMM Control

Enable or disable DIMMs on Channel B.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.5. Boot Setup

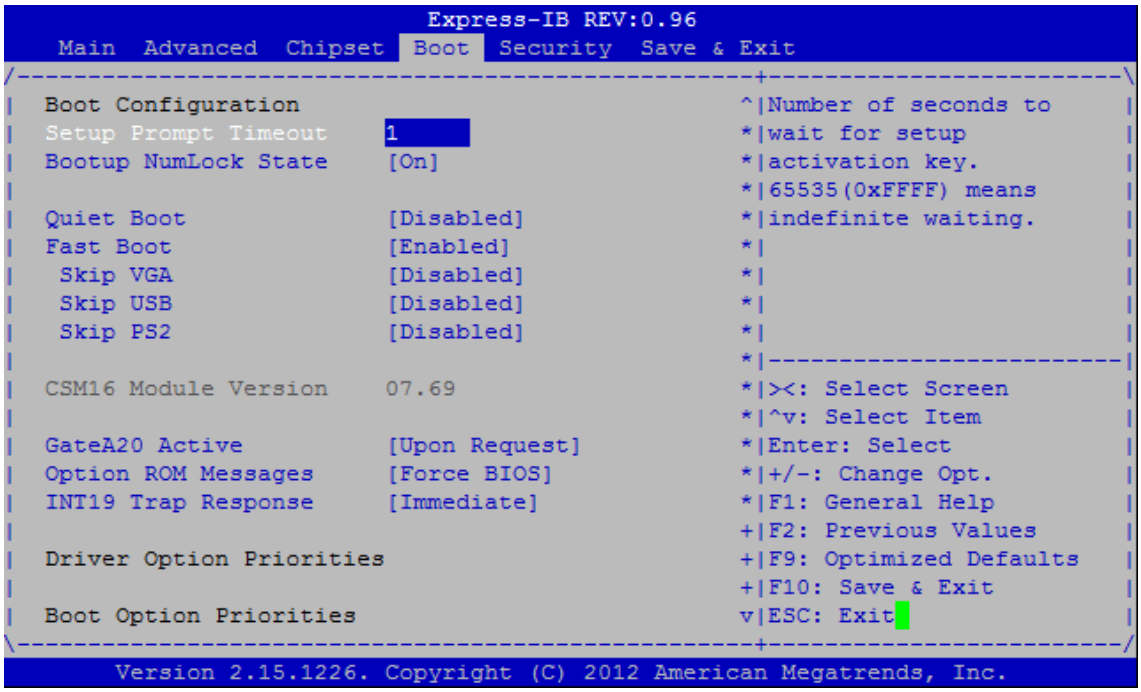

Setup Prompt Timeout

Number of seconds to wait for setup activation key. 65535 (0xFFFF) means indefinite waiting.

Bootup Numlock State

Select the keyboard NumLock state

Quiet Boot

Enable or disables Quiet Boot option

Fast Boot

Enables or disables boot with initialization of a minimal set of devices required to launch active boot option. Has no effect for BBS boot options.

GateA20 Active

Upon Request - GA20 can be disabled using BIOS services. Always - do not allow disabling of GA20; this option is useful when any RT code is executed above 1MB.

Option ROM Messages

Set display mode for Option ROM

INT19 Trap Response


BIOS reaction on INT19 trapping by Option ROM: Immediate - execute the trap right away; Postponed - execute the trap during legacy boot.

CSM parameters

OpROM execution, boot options filter, etc.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.6. Security Setup

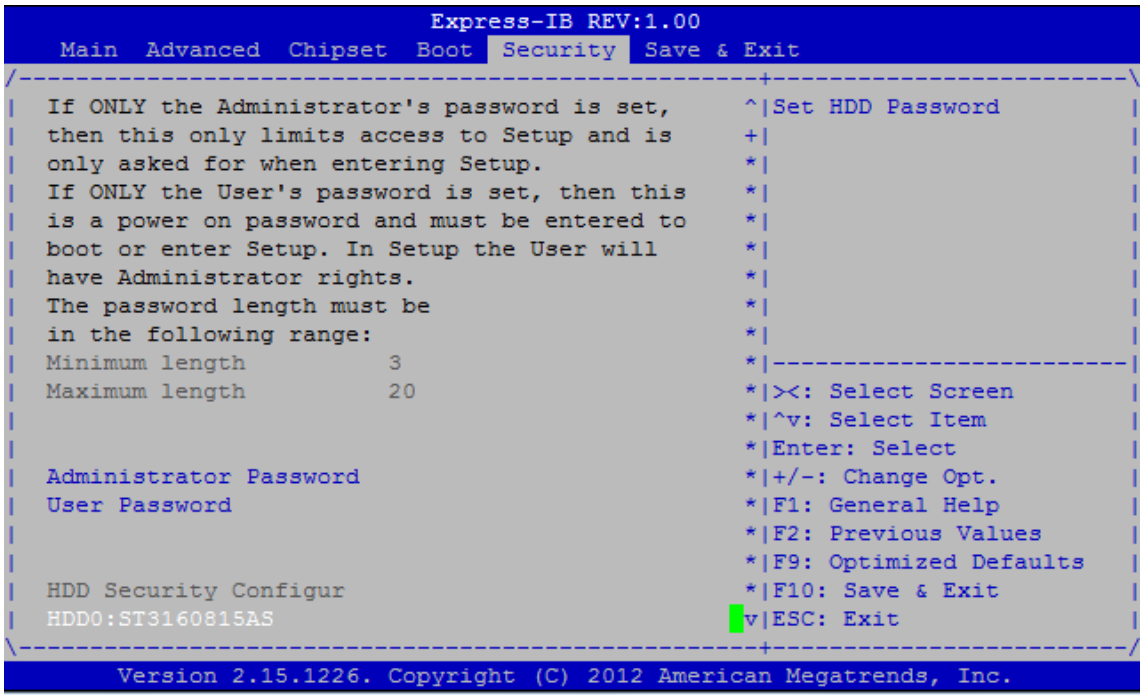

Administrator Password

Set Administrator Password

User Password


Set User Password

HDD0:

Set HDD Password

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7.7. Save & Exit Menu

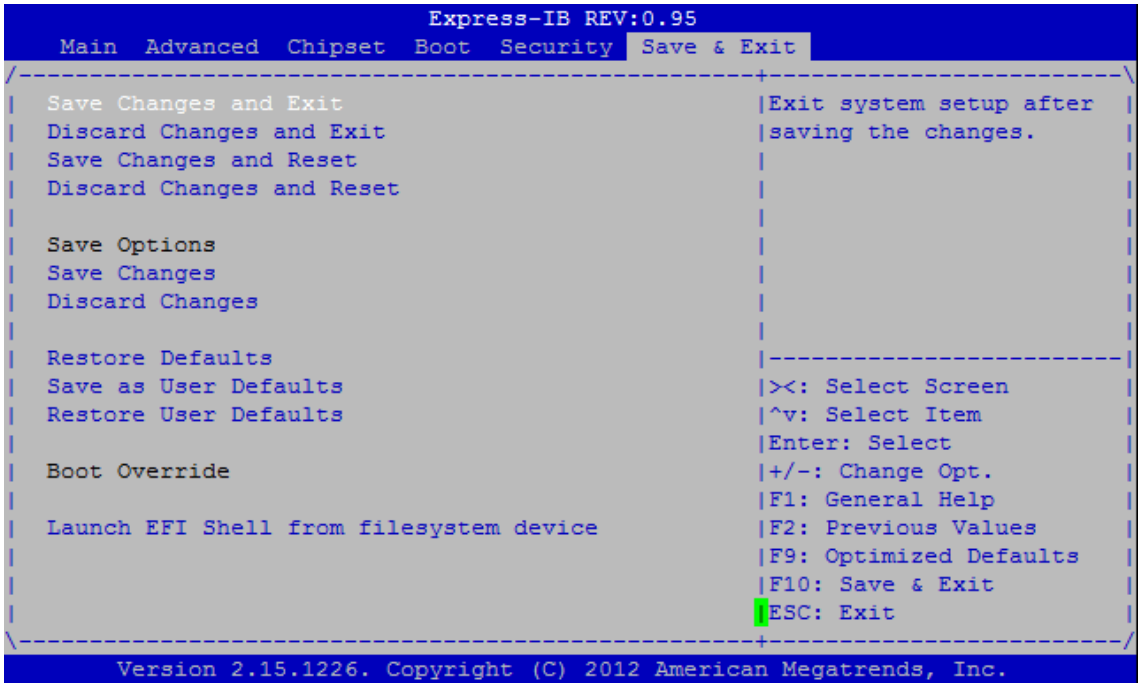

Save Changes and Exit

Exit system setup after saving the changes.

Discard Changes and Exit

Exit system setup without saving any changes.

Save changes and Reset

Reset the system after saving the changes.

Discard changes and Reset

Reset system setup without saving any changes.

Save changes

Save Changes done so far to any of the setup options.

Discard Changes

Discard Changes done so far to any of the setup options.

Restore Defaults

Restore/Load Default values for all the setup options.

Save as User Defaults

Save the changes done so far as User Defaults.

Restore User Defaults

Restore the User Defaults to all the setup options.

Launch EFI Shell from filesystem device

Attempts to Launch EFI Shell application (Shellx64.efi) from one of the available filesystem devices

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

8. BIOS Checkpoints, Beep Codes

This section of this document lists checkpoints and beep codes generated by AMI Aptio BIOS. The checkpoints defined in this document are inherent to the AMIBIOS generic core, and do not include any chipset or board specific checkpoint definitions.

Checkpoints and Beep Codes Definition

A checkpoint is either a byte or word value output to I/O port 80h. The BIOS outputs checkpoints throughout bootblock and Power-On Self Test (POST) to indicate the task the system is currently executing. Checkpoints are very useful for debugging problems that occur during the preboot process.

Beep codes are used by the BIOS to indicate a serious or fatal error. They are used when an error occurs before the system video has been initialized, and generated by the system board speaker.

Aptio Boot Flow

While performing the functions of the traditional BIOS, Aptio 5.x core follows the firmware model described by the Intel Platform Innovation Framework for EFI ("the Framework"). The Framework refers the following "boot phases", which may apply to various status code & checkpoint descriptions:

- Security (SEC) – initial low-level initialization
- Pre-EFI Initialization (PEI) – memory initialization[1]
- Driver Execution Environment (DXE) – main hardware initialization[2]
- Boot Device Selection (BDS) – system setup, pre-OS user interface & selecting a bootable device (CD/DVD, HDD, USB, Network, Shell, …)

Viewing BIOS Checkpoints

Viewing all checkpoints generated by the BIOS requires a checkpoint card, also referred to as a POST Card or POST Diagnostic Card. These are PCI add-in cards that show the value of I/O port 80h on a LED display.

Some computers display checkpoints in the bottom right corner of the screen during POST. This display method is limited, since it only displays checkpoints that occur after the video card has been activated.

Keep in mind that not all computers using AMI Aptio BIOS enable this feature. In most cases, a checkpoint card is the best tool for viewing AMI Aptio BIOS checkpoints.

[1]Analogous to "bootblock" functionality of legacy BIOS
[2]Analogous to "POST" functionality in legacy BIOS

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

8.1. Status Code Ranges

Status Code Range	Description
0x01 – 0x0F	SEC Status Codes & Errors
0x10 – 0x2F	PEI execution up to and including memory detection
0x30 – 0x4F	PEI execution after memory detection
0x50 – 0x5F	PEI errors
0x60 – 0xCF	DXE execution up to BDS
0xD0 – 0xDF	DXE errors
0xE0 – 0xE8	S3 Resume (PEI)
0xE9 – 0xEF	S3 Resume errors (PEI)
0xF0 – 0xF8	Recovery (PEI)
0xF9 – 0xFF	Recovery errors (PEI)

8.2. Standard Status Codes

8.2.1. SEC Status Codes

Status Code	Description
0x0	Not used
Progress Codes	
0x1	Power on. Reset type detection (soft/hard).
0x2	AP initialization before microcode loading
0x3	North Bridge initialization before microcode loading
0x4	South Bridge initialization before microcode loading
0x5	OEM initialization before microcode loading
0x6	Microcode loading
0x7	AP initialization after microcode loading
0x8	North Bridge initialization after microcode loading
0x9	South Bridge initialization after microcode loading
0xA	OEM initialization after microcode loading
0xB	Cache initialization
SEC Error Codes	
0xC – 0xD	Reserved for future AMI SEC error codes
0xE	Microcode not found
0xF	Microcode not loaded

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

8.2.2. SEC Beep Codes

None

8.2.3. PEI Status Codes

Status Code	Description
Progress Codes	
0x10	PEI Core is started
0x11	Pre-memory CPU initialization is started
0x12	Pre-memory CPU initialization (CPU module specific)
0x13	Pre-memory CPU initialization (CPU module specific)
0x14	Pre-memory CPU initialization (CPU module specific)
0x15	Pre-memory North Bridge initialization is started
0x16	Pre-Memory North Bridge initialization (North Bridge module specific)
0x17	Pre-Memory North Bridge initialization (North Bridge module specific)
0x18	Pre-Memory North Bridge initialization (North Bridge module specific)
0x19	Pre-memory South Bridge initialization is started
0x1A	Pre-memory South Bridge initialization (South Bridge module specific)
0x1B	Pre-memory South Bridge initialization (South Bridge module specific)
0x1C	Pre-memory South Bridge initialization (South Bridge module specific)
0x1D – 0x2A	OEM pre-memory initialization codes
0x2B	Memory initialization. Serial Presence Detect (SPD) data reading
0x2C	Memory initialization. Memory presence detection
0x2D	Memory initialization. Programming memory timing information
0x2E	Memory initialization. Configuring memory
0x2F	Memory initialization (other).
0x30	Reserved for ASL (see ASL Status Codes section below)
0x31	Memory Installed
0x32	CPU post-memory initialization is started
0x33	CPU post-memory initialization. Cache initialization
0x34	CPU post-memory initialization. Application Processor(s) (AP) initialization
0x35	CPU post-memory initialization. Boot Strap Processor (BSP) selection
0x36	CPU post-memory initialization. System Management Mode (SMM) initialization
0x37	Post-Memory North Bridge initialization is started
0x38	Post-Memory North Bridge initialization (North Bridge module specific)
0x39	Post-Memory North Bridge initialization (North Bridge module specific)
0x3A	Post-Memory North Bridge initialization (North Bridge module specific)
0x3B	Post-Memory South Bridge initialization is started
0x3C	Post-Memory South Bridge initialization (South Bridge module specific)
0x3D	Post-Memory South Bridge initialization (South Bridge module specific)
0x3E	Post-Memory South Bridge initialization (South Bridge module specific)
0x3F-0x4E	OEM post memory initialization codes

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Status Code	Description
0x4F	DXE IPL is started
PEI Error Codes	
0x50	Memory initialization error. Invalid memory type or incompatible memory speed
0x51	Memory initialization error. SPD reading has failed
0x52	Memory initialization error. Invalid memory size or memory modules do not match.
0x53	Memory initialization error. No usable memory detected
0x54	Unspecified memory initialization error.
0x55	Memory not installed
0x56	Invalid CPU type or Speed
0x57	CPU mismatch
0x58	CPU self test failed or possible CPU cache error
0x59	CPU micro-code is not found or micro-code update is failed
0x5A	Internal CPU error
0x5B	reset PPI is not available
0x5C-0x5F	Reserved for future AMI error codes
S3 Resume Progress Codes	
0xE0	S3 Resume is stared (S3 Resume PPI is called by the DXE IPL)
0xE1	S3 Boot Script execution
0xE2	Video repost
0xE3	OS S3 wake vector call
0xE4-0xE7	Reserved for future AMI progress codes
0xE0	S3 Resume is stared (S3 Resume PPI is called by the DXE IPL)
S3 Resume Error Codes	
0xE8	S3 Resume Failed in PEI
0xE9	S3 Resume PPI not Found
0xEA	S3 Resume Boot Script Error
0xEB	S3 OS Wake Error
0xEC-0xEF	Reserved for future AMI error codes
Recovery Progress Codes	
0xF0	Recovery condition triggered by firmware (Auto recovery)
0xF1	Recovery condition triggered by user (Forced recovery)
0xF2	Recovery process started
0xF3	Recovery firmware image is found
0xF4	Recovery firmware image is loaded
0xF5-0xF7	Reserved for future AMI progress codes
Recovery Error Codes	
0xF8	Recovery PPI is not available
0xF9	Recovery capsule is not found
0xFA	Invalid recovery capsule
0xFB – 0xFF	Reserved for future AMI error codes

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

8.2.4. PEI Beep Codes

# of Beeps	Description
1	Memory not Installed
1	Memory was installed twice (InstallPeiMemory routine in PEI Core called twice)
2	Recovery started
3	DXEIPL was not found
3	DXE Core Firmware Volume was not found
7	Reset PPI is not available
4	Recovery failed
4	S3 Resume failed

8.2.5. DXE Status Codes

Status Code	Description
0x60	DXE Core is started
0x61	NVRAM initialization
0x62	Installation of the South Bridge Runtime Services
0x63	CPU DXE initialization is started
0x64	CPU DXE initialization (CPU module specific)
0x65	CPU DXE initialization (CPU module specific)
0x66	CPU DXE initialization (CPU module specific)
0x67	CPU DXE initialization (CPU module specific)
0x68	PCI host bridge initialization
0x69	North Bridge DXE initialization is started
0x6A	North Bridge DXE SMM initialization is started
0x6B	North Bridge DXE initialization (North Bridge module specific)
0x6C	North Bridge DXE initialization (North Bridge module specific)
0x6D	North Bridge DXE initialization (North Bridge module specific)
0x6E	North Bridge DXE initialization (North Bridge module specific)
0x6F	North Bridge DXE initialization (North Bridge module specific)
0x70	South Bridge DXE initialization is started
0x71	South Bridge DXE SMM initialization is started
0x72	South Bridge devices initialization
0x73	South Bridge DXE Initialization (South Bridge module specific)
0x74	South Bridge DXE Initialization (South Bridge module specific)
0x75	South Bridge DXE Initialization (South Bridge module specific)
0x76	South Bridge DXE Initialization (South Bridge module specific)

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Status Code	Description
0x77	South Bridge DXE Initialization (South Bridge module specific)
0x78	ACPI module initialization
0x79	CSM initialization
0x7A – 0x7F	Reserved for future AMI DXE codes
0x80 – 0x8F	OEM DXE initialization codes
0x90	Boot Device Selection (BDS) phase is started
0x91	Driver connecting is started
0x92	PCI Bus initialization is started
0x93	PCI Bus Hot Plug Controller Initialization
0x94	PCI Bus Enumeration
0x95	PCI Bus Request Resources
0x96	PCI Bus Assign Resources
0x97	Console Output devices connect
0x98	Console input devices connect
0x99	Super IO Initialization
0x9A	USB initialization is started
0x9B	USB Reset
0x9C	USB Detect
0x9D	USB Enable
0x9E – 0x9F	Reserved for future AMI codes
0xA0	IDE initialization is started
0xA1	IDE Reset
0xA2	IDE Detect
0xA3	IDE Enable
0xA4	SCSI initialization is started
0xA5	SCSI Reset
0xA6	SCSI Detect
0xA7	SCSI Enable
0xA8	Setup Verifying Password
0xA9	Start of Setup
0xAA	Reserved for ASL (see ASL Status Codes section below)
0xAB	Setup Input Wait
0xAC	Reserved for ASL (see ASL Status Codes section below)
0xAD	Ready To Boot event
0xAE	Legacy Boot event

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Status Code	Description
0xAF	Exit Boot Services event
0xB0	Runtime Set Virtual Address MAP Begin
0xB1	Runtime Set Virtual Address MAP End
0xB2	Legacy Option ROM Initialization
0xB3	System Reset
0xB4	USB hot plug
0xB5	PCI bus hot plug
0xB6	Clean-up of NVRAM
0xB7	Configuration Reset (reset of NVRAM settings)
0xB8 – 0xBF	Reserved for future AMI codes
0xC0 – 0xCF	OEM BDS initialization codes
DXE Error Codes	
0xD0	CPU initialization error
0xD1	North Bridge initialization error
0xD2	South Bridge initialization error
0xD3	Some of the Architectural Protocols are not available
0xD4	PCI resource allocation error. Out of Resources
0xD5	No Space for Legacy Option ROM
0xD6	No Console Output Devices are found
0xD7	No Console Input Devices are found
0xD8	Invalid password
0xD9	Error loading Boot Option (LoadImage returned error)
0xDA	Boot Option is failed (StartImage returned error)
0xDB	Flash update is failed
0xDC	Reset protocol is not available

8.2.6. DXE Beep Codes

# of Beeps	Description
4	Some of the Architectural Protocols are not available
5	No Console Output Devices are found
5	No Console Input Devices are found
1	Invalid password
6	Flash update is failed
7	Reset protocol is not available
8	Platform PCI resource requirements cannot be met

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

8.2.7. ACPI/ASL Checkpoint

Status Code	Description
0x01	System is entering S1 sleep state
0x02	System is entering S2 sleep state
0x03	System is entering S3 sleep state
0x04	System is entering S4 sleep state
0x05	System is entering S5 sleep state
0x10	System is waking up from the S1 sleep state
0x20	System is waking up from the S2 sleep state
0x30	System is waking up from the S3 sleep state
0x40	System is waking up from the S4 sleep state
0xAC	System has transitioned into ACPI mode. Interrupt controller is in PIC mode.
0xAA	System has transitioned into ACPI mode. Interrupt controller is in APIC mode.

8.3. OEM-Reserved Checkpoint Ranges

Status Code	Description
0x05	OEM SEC initialization before microcode loading
0x0A	OEM SEC initialization after microcode loading
0x1D – 0x2A	OEM pre-memory initialization codes
0x3F – 0x4E	OEM PEI post memory initialization codes
0x80 – 0x8F	OEM DXE initialization codes
0xC0 – 0xCF	OEM BDS initialization codes

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Safety Instructions

Read and follow all instructions marked on the product and in the documentation before you operate your system. Retain all safety and operating instructions for future use.

- Please read these safety instructions carefully.
- Please keep this User's Manual for later reference.
- Read the specifications section of this manual for detailed information on the operating environment of this equipment.
- When installing/mounting or uninstalling/removing equipment, turn off the power and unplug any power cords/cables.
- To avoid electrical shock and/or damage to equipment:
  - Keep equipment away from water or liquid sources.
  - Keep equipment away from high heat or high humidity.
  - Keep equipment properly ventilated (do not block or cover ventilation openings).
  - Make sure to use recommended voltage and power source settings.
  - Always install and operate equipment near an easily accessible electrical socket-outlet.
  - Secure the power cord (do not place any object on/over the power cord).
  - Only install/attach and operate equipment on stable surfaces and/or recommended mountings.
  - If the equipment will not be used for long periods of time, turn off and unplug the equipment from its power source.
- Never attempt to fix the equipment. Equipment should only be serviced by qualified personnel.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Getting Service

ADLINK Technology, Inc.

Address: 9F, No.166 Jian Yi Road, Zhonghe District
New Taipei City 235, Taiwan
Tel: +886-2-8226-5877
Fax: +886-2-8226-5717
Email: service@adlinktech.com

Ampro ADLINK Technology, Inc.

Address: 5215 Hellyer Avenue, #110, San Jose, CA 95138, USA
Tel: +1-408-360-0200
Toll Free: +1-800-966-5200 (USA only)
Fax: +1-408-360-0222
Email: info@adlinktech.com

ADLINK Technology (China) Co., Ltd.

Address: 300 Fang Chun Rd., Zhangjiang Hi-Tech Park,Pudong New Area
Shanghai, 201203 China
Tel: +86-21-5132-8988
Fax: +86-21-5132-3588
Email: market@adlinktech.com

ADLINK Technology Beijing

Address: Rm. 801, Power Creative E, No. 1, B/D, Shang Di East Rd.
Beijing, 100085 China
Tel: +86-10-5885-8666
Fax: +86-10-5885-8625
Email: market@adlinktech.com

ADLINK Technology Shenzhen

Address: 2F, C Block, Bldg. A1, Cyber-Tech Zone, Gao Xin Ave. Sec. 7, High-Tech Industrial Park S.
Shenzhen, 518054 China
Tel: +86-755-2643-4858
Fax: +86-755-2664-6353
Email: market@adlinktech.com

LiPPERT ADLINK Technology GmbH

Address: Hans-Thoma-Strasse 11, D-68163, Mannheim, Germany
Tel: +49-621-43214-0
Fax: +49-621 43214-30
Email: emea@adlinktech.com

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

ADLINK Technology, Inc. (French Liaison Office)

Address: 6 allée de Londres, Immeuble Ceylan
91940 Les Ulis, France

Tel: +33 (0) 1 60 12 35 66

Fax: +33 (0) 1 60 12 35 66

Email: france@adlinktech.com

ADLINK Technology Japan Corporation

Address: KANDA374 Bldg. 4F, 3-7-4 Kanda Kajicho, Chiyoda-ku
Tokyo 101-0045, Japan

Tel: +81-3-4455-3722

Fax: +81-3-5209-6013

Email: japan@adlinktech.com

ADLINK Technology, Inc. (Korean Liaison Office)

Address: 802, Mointer B/D, 326 Seocho-daero, Seocho-Gu,
Seoul 137-881, Korea

Tel: +82-2-2057-0565

Fax: +82-2-2057-0563

Email: korea@adlinktech.com

ADLINK Technology Singapore Pte. Ltd.

Address: 84 Genting Lane #07-02A, Cityneon Design Centre
Singapore 349584

Tel: +65-6844-2261

Fax: +65-6844-2263

Email: singapore@adlinktech.com

ADLINK Technology Singapore Pte. Ltd. (Indian Liaison Office)

Address: #50-56, First Floor, Spearhead Towers
Margosa Main Road (between 16th/17th Cross), Malleswaram
Bangalore - 560 055, India

Tel: +91-80-65605817, +91-80-42246107

Fax: +91-80-23464606

Email: india@adlinktech.com

ADLINK Technology, Inc. (Israeli Liaison Office)

Address: 27 Maskit St., Corex Building
PO Box 12777
Herzliya 4673300, Israel

Tel: +972-54-632-5251

Fax: +972-77-208-0230

Email: israel@adlinktech.com

ADLINK Technology, Inc. (UK Liaison Office)

Tel: +44 774 010 59 65

Email: UK@adlinktech.com

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000