MVP-6000 Series

High Performance 6th Generation Intel® Core™

i7/i5/i3 Fanless Computer

MVP-6001/MVP-6002/MVP-6003

User's Manual



Manual Rev.:	4.0
Revision Date:	May 6, 2019
Part No:	50-1Z214-2020

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Leading **EDGE COMPUTING**

Revision History

Revision	Release Date	Description of Change(s)
2.00	July 22, 2016	Initial Release
3.0	Dec. 6, 2018	Rev. to accommodate I\O changes
4.0	May 6, 2019	Spec revised & errata resolved

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Preface

Copyright 2019 ADLINK Technology Inc.


This document contains proprietary information protected by copyright. All rights are reserved. No part of this manual may be reproduced by any mechanical, electronic, or other means in any form without prior written permission of the manufacturer.

Disclaimer

The information in this document is subject to change without prior notice in order to improve reliability, design, and function and does not represent a commitment on the part of the manufacturer.

In no event will the manufacturer be liable for direct, indirect, special, incidental, or consequential damages arising out of the use or inability to use the product or documentation, even if advised of the possibility of such damages.

Environmental Responsibility



ADLINK is committed to fulfill its social responsibility to global environmental preservation through compliance with the European Union's Restriction of Hazardous Substances (RoHS) directive and Waste Electrical and Electronic Equipment (WEEE) directive. Environmental protection is a top priority for ADLINK. We have enforced measures to ensure that our products, manufacturing processes, components, and raw materials have as little impact on the environment as possible. When products are at their end of life, our customers are encouraged to dispose of them in accordance with the product disposal and/or recovery programs prescribed by their nation or company.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Battery Labels (for products with battery)



California Proposition 65 Warning

WARNING: This product can expose you to chemicals including acrylamide, arsenic, benzene, cadmium, Tris(1,3-dichloro-2-propyl) phosphate (TDCPP), 1,4-Dioxane, formaldehyde, lead, DEHP, styrene, DINP, BBP, PVC, and vinyl materials, which are known to the State of California to cause cancer, and acrylamide, benzene, cadmium, lead, mercury, phthalates, toluene, DEHP, DIDP, DnHP, DBP, BBP, PVC, and vinyl materials, which are known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Trademarks

Product names mentioned herein are used for identification purposes only and may be trademarks and/or registered trademarks of their respective companies.

Conventions

Take note of the following conventions used throughout this manual to make sure that users perform certain tasks and instructions properly.

NOTE: Additional information, aids, and tips that help users perform tasks.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000



Information to prevent ***minor*** physical injury, component damage, data loss, and/or program corruption when trying to complete a task.



Information to prevent ***serious*** physical injury, component damage, data loss, and/or program corruption when trying to complete a specific task.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

This page intentionally left blank.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Table of Contents

Preface iii

List of Tables xiii

List of Figures xv

1 Introduction 1

1.1 Overview 1
1.2 Features 1
1.3 Specifications 2
1.4 Schematics and Dimensions 5
1.5 Front Panel I/O Connectors 9
1.5.1 Power Button 10
1.5.2 LED Indicators 10
1.5.3 PCI Slot 10
1.5.4 PCI Express x16 Slot 10
1.5.5 Reset Button 10
1.5.6 DisplayPort Connectors 11
Display Options 12
1.5.7 Digital I/O Connector 12
8-channel Digital Input 12
8-channel Digital Output 12
1.5.8 DVI-D Connector 15
1.5.9 VGA Connector 15
1.5.10 USB 2.0 Ports 16
1.5.11 Gigabit Ethernet Ports 16
1.5.12 USB 3.0 Ports 18
1.5.13 DC Power Connector 18
1.5.14 COM Port Connectors 19
1.6 Rear-Mounted CFast Host Connector 19
1.7 Internal I/O Connectors 21

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1.7.1 GPS Module Power Headers 22
1.7.2 USB 2.0 Connector 23
1.7.3 Mini-PCIe Connector 23
1.7.4 SATA Connector 23
1.7.5 9V Fan Connector 23
1.7.6 Clear CMOS Jumper 24
1.7.7 Extended PWR/RESET header 25
1.7.8 USIM Slot 25
1.7.9 12V Power for Add-on Card 25
1.7.10 Backboard to System PCB Connector 26
1.7.11 12V DC Fan Connector 26

2 Getting Started 29
2.1 Unpacking Checklist 29
2.2 Installing Hard Disk Drives 29
2.3 Installing CFast Cards 34
2.4 Wall-mounting the MVP-6000 36
2.5 Driver Installation 39

A Appendix: Power Consumption 41
A.1 Power Consumption Reference 41
A.2 Power Supply Reference 42
A.3 Accessory Cabling 42

B Appendix: BIOS Setup 43
B.1 Main 43
BIOS Information 44
Platform Information 44
FW Information 44
System Time/System Date 45
B.2 Advanced 45
B.2.1 CPU Configuration 46
Hyper-Threading 47

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Active Processor Cores 47
Intel Virtualization Technology 47
CPU AES 47
Intel(R) SpeedStep(tm) 47
CPU C States 47
Intel TXT(LT) Support 47
TCC Activation Offset 47
B.2.2 Memory Configuration 48
B.2.3 System Agent (SA) Configuration 49
VT-d 49
B.2.4 Graphics Configuration 50
Primary Display 50
GTT Size 50
Aperture Size 50
DVMT Pre-Allocated 51
DVMT Total Gfx Mem 51
B.2.5 Onboard Device Configuration 51
Serial Port 1 to 4 Configuration 51
LAN #1 (Intel I211AT) 52
LAN #1(I211AT) Launch PXE OpROM 52
LAN #2 (Intel I211AT) 52
LAN #2(I211AT) Launch PXE OpROM 52
LAN #3 (Intel I211AT) 52
LAN #3(I211AT) Launch PXE OpROM 52
Serial Port Console Redirection 53
B.2.6 Advanced Power Management 54
State After G3 54
State After G3 54
RTC Wake system from S5 55
BIOS POST Watchdog 55
B.2.7 USB Configuration 55
Legacy USB Support 55

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

XHCI Hand-off 56
USB Mass Storage Driver Support 56
Port 60/64 Emulation 56
USB transfer time-out 56
Device reset time-out 56
Device power-up delay 56
B.2.8 SATA Configuration 57
SATA Port and CFast Card 57
B.2.9 CSM Configuration 58
CSM Support 58
GateA20 Active 58
Option ROM Messages 58
Boot option filter 58
Network 59
Storage 59
Video 59
Other PCI devices 59
B.3 Security 60
Administrator Password 60
User Password 60
RTC Lock 60
BIOS Lock 61
B.4 Boot 61
Setup Prompt Timeout 61
Bootup Num-Lock State 61
Quiet Boot 62
Fast Boot 62
Boot Option Priorities 62
B.5 Save & Exit 64
Discard Changes and Exit 64
Save Changes and Reset 64
Discard Changes 64

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Restore Defaults 65
Save as User Defaults 65
Restore User Defaults 65
Launch EFI Shell from filesystem device 65

C Appendix: Watchdog Timer (WDT) Function Library 67

C.1 WDT with API/Windows 67
InitWDT 67
SetWDT 68
C.2 WDT with DOS/Linux 70

D Appendix: Digital Input/Output Function Library 73

DI/O with API/Windows 73

Important Safety Instructions 75

Getting Service 79

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

This page intentionally left blank.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

List of Tables

Table 1-1: General Specifications 2
Table 1-2: Power Recommendations 4
Table 1-3: Front Panel I/O Connector Legend 9
Table 1-4: LED Indicators 10
Table 1-5: DisplayPort Pin Assignments 11
Table 1-6: Applicable Cable Types 11
Table 1-7: Maximum Available Resolutions with 2-Display Configuration 12
Table 1-8: Digital Input Connector Pin Legend 13
Table 1-9: Digital Output Connector Pin Legend 14
Table 1-10: DVI-D Connector Pin Legend 15
Table 1-11: VGA Connector Pin Legend 16
Table 1-12: Active/Link LED Indicators 17
Table 1-13: Speed LED Indicators 17
Table 1-14: DC Power Supply Connector Signals 18
Table 1-15: D-Sub 9p Signal Function of COM Ports 19
Table 1-16: Mainboard Connector Legend 21
Table 1-17: Backplane Board Connector Legend 22
Table A-1: Power Consumption 41
Table A-2: Power Supply 42

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

This page intentionally left blank.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

List of Figures

Figure 1-1: MVP-6000 Functional Block Diagram 4
Figure 1-2: Left Side View 5
Figure 1-3: Top View 6
Figure 1-4: Front View 7
Figure 1-5: Rear View 7
Figure 1-6: Underside View 8
Figure 1-7: Front Panel I/O Connectors 9
Figure 1-8: DisplayPort Connector 11
Figure 1-9: Digital I/O Connector Pin Assignment 13
Figure 1-10: Digital Input Circuit 14
Figure 1-11: Digital Output Circuit 14
Figure 1-12: DVI-D Connector Pin Assignment 15
Figure 1-13: VGA Connector Pin Assignment 15
Figure 1-14: Ethernet Port and LED Legend 17
Figure 1-15: DC Power Connector 18
Figure 1-16: COM Port 19
Figure 1-17: CFast Host Connector (on rear panel) 20
Figure 1-18: Mainboard I/O Connectors 21
Figure 1-19: Backplane Board PCB 22
Figure 1-20: Clear CMOS Jumper Setting 24

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

This page intentionally left blank.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1 Introduction

1.1 Overview

ADLINK's MVP-6000 Series of value line fanless embedded computing platforms, incorporating the 6th Generation Intel® Core™ processor, provides one PCIe x16 and one PCI slot, one mini-PCIe slot and single-side access for I/O ports, optimizing easy maintenance in industrial automation environments. The series retains the robust design of all ADLINK MXC/MXE lines, at a new extremely cost-effective price point. The MVP-6000 series supports DDR4 memory for more powerful computing and the Intel® HD Graphics 530 speeds graphics performance. Along with a versatile I/O array and flexible expansion capacity, the MVP-6000 Series fully satisfies all the needs of industrial automation with the performance demanded by vision inspection, motion control, and surveillance applications. Fanless construction not only overcomes contaminant and noise challenges presented by harsh IA environments, the elimination of problematic structural elements that negatively affect MTBF greatly increases lifecycle expectations for the platform.

1.2 Features

- 6th Generation Intel® Core™ i7/i5/i3 Skylake FCLGA1151 processor + H110 chipset
- 2 x DDR4 SO-DIMM socket, supporting up to 32GB DDR4 2133 SO-DIMM Module
- 1x PCIex16 + 1x PCI slots available, supporting Gen3 PCIe cards
- Supports 2 independent displays with on-board 2x DisplayPort, 1x DVI-D, and 1x VGA ports onboard
- 6 External USB ports (4x USB 3.0, 2x USB 2.0), 1 internal USB 2.0 port
- 3 Intel GbE LAN ports with teaming function
- Built-in 8CH DI and 8CH DO, 2 software-programmable RS-232/422/485 + 2 RS-232 ports

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

- CFast socket, onboard SATA III port for 2.5” HDD/SSD installation, and SATA 6Gb/s
- Built-in wide-range 12V DC to 24V DC power input
- Fanless operation from 0°C to 50°C (w/ industrial SSD)

NOTE: This option guarantees cold boot of the system at 0°c and operation with 100% loading at 50° without add-on cards. The industrial solid-state drive storage option is required.

1.3 Specifications

	MVP-6001	MVP-6002	MVP-6003
System Core			
Processor	Intel® Core™ i7-6700TE Quad Core, 2.4GHZ, 8M cache (Max Turbo Frequency up to 3.40 GHz)	Intel® Core™ i5-6500TE Quad Core, 2.3GHZ, 6M cache (Max Turbo Frequency up to 3.30 GHz)	Intel® Core™ i3-6100TE Dual Core, 2.7GHZ, 4M cache
Chipset	Intel® Mobile Platform Controller Hub (H110)		
Video	2x DisplayPort (Resolution up to 4096x2304) 1x DVI-D (Resolution up to 4096x2160) 1x VGA up to 1920x1200		
Memory	4GB DDR4 2133MHz SODIMM module (Max. capacity 32GB with 2x SODIMM socket option)		
I/O Interface			
Expansion slots	1x PCIex16 1x PCI Supports Gen3 PCIe cards (174mm) PCI/PCIe combined power consumption: 50W		
Ethernet	3x Intel® GbE ports (3x Intel® Ethernet controller I211-AT) Supports teaming, Wake On LAN		
Serial Ports	2 software-programmable RS-232/422/485 (COM1 & COM2) with auto flow control 2 RS-232 (COM3 & COM4)		

Table 1-1: General Specifications

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

	MVP-6001	MVP-6002	MVP-6003
USB	4x USB 3.0 2x USB 2.0 (external)**** 1x internal USB 2.0 (optional)		
DI/O	8CH DI 8CH DO		
Audio	1 Mic-in and 1 Line-out		
Power Supply			
DC Input	Built-in wide-range 12 to 24V DC input 3P pluggable connectors with latch (GND, V-, V+)		
AC Input	Optional 160 W external AC-DC adapter for AC input		
Storage			
2.5" SATA	1x internal SATA-III port for 2.5" HDD/SSD installation SATA RAID 0,1 & high speed SATA 6 Gb/s support		
CFast	CFast (external,), supporting PI/O and DMA modes		
Mechanical			
Fan Module	Optional fan module for dissipating heat from PCI/PCIe card, Smart Fan Control		
Dimensions	220(W) x 210(D) x 170(H) mm (8.67 x 8.27 x 6.69 in.)		
Weight	4.5 kg (9.92lb)		
Mounting	Wall-mount kit		
Environmental			
Operating Temperature (Ambient w/o airflow)	0°C to 50°C		
Storage Temperature	-40°C to 85°C (-40 to 185°F) excl. HDD/SDD/CFast		
Humidity	Approx. 95% @ 40°C (non-condensing)		
ESD	Contact +/-4 KV and Air +/-8 KV		
Shock	Operating, 100G, half sine 11 ms duration (w/ CFast or SSD)		
EMC	CE and FCC Class A		

Table 1-1: General Specifications

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Power Supply (24VDC)	Power Off	System Idle*	System Full Load**	Recommended Power Supply***
Integrated Embedded Computer				
MVP-6001	2.9 W	19.68 W	53.52 W	160W
MVP-6002	2.9 W	18.26 W	52.18 W	160W
MVP-6003	2.9 W	17.9 W	50.66 W	160W

Table 1-2: Power Recommendations

*Under Windows 7 desktop with no application programs executed

**Under Windows 7 with 100% CPU utilization and simultaneous access to all I/O devices

***Additional power supply required if add-on cards are installed and in use

****All external USB ports support up to 1.6A

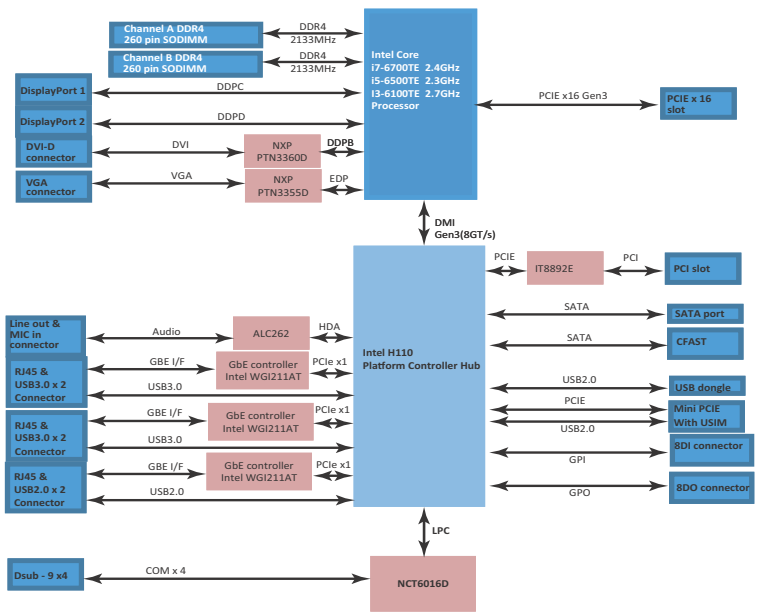


Figure 1-1: MVP-6000 Functional Block Diagram

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1.4 Schematics and Dimensions

NOTE:

All dimensions shown are in mm (millimeters).

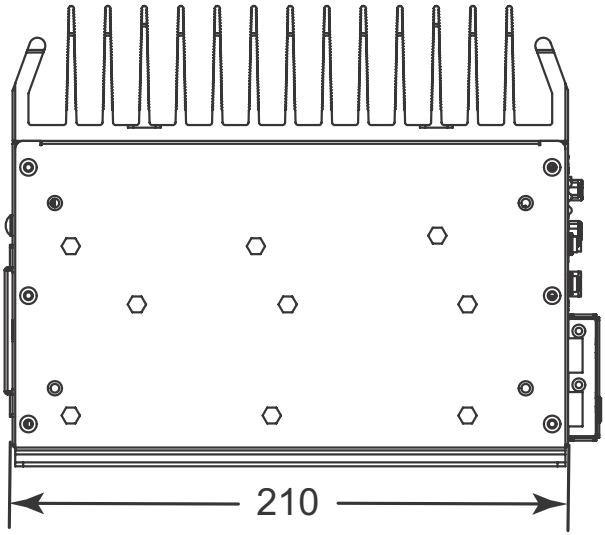


Figure 1-2: Left Side View

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

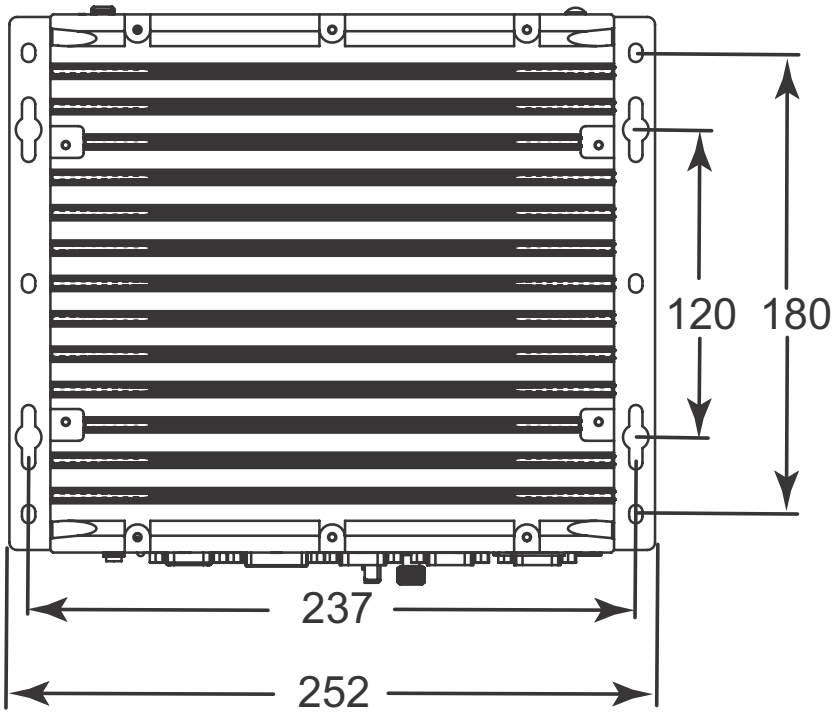


Figure 1-3: Top View

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

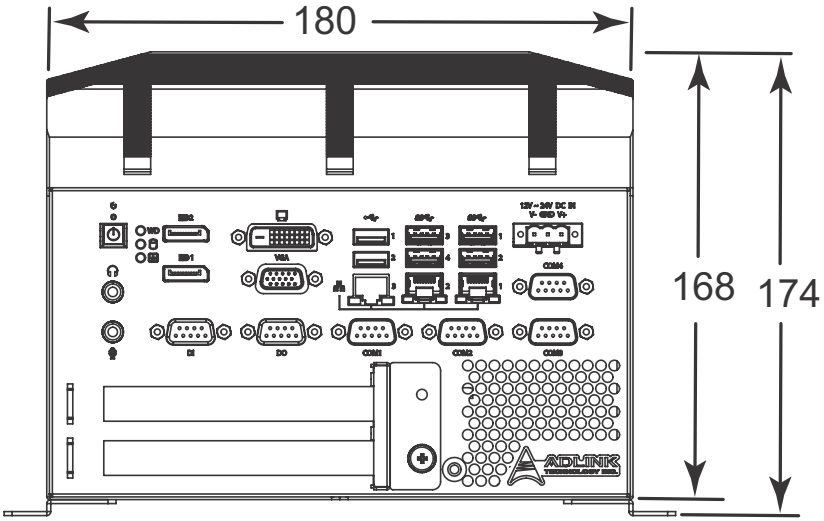


Figure 1-4: Front View

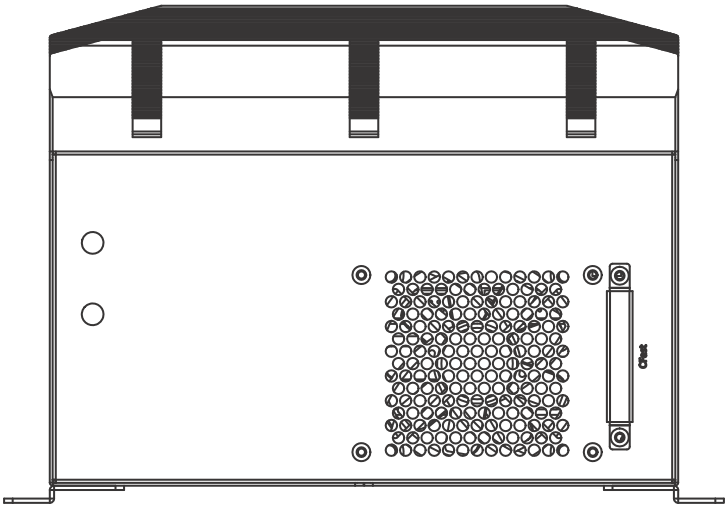


Figure 1-5: Rear View

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

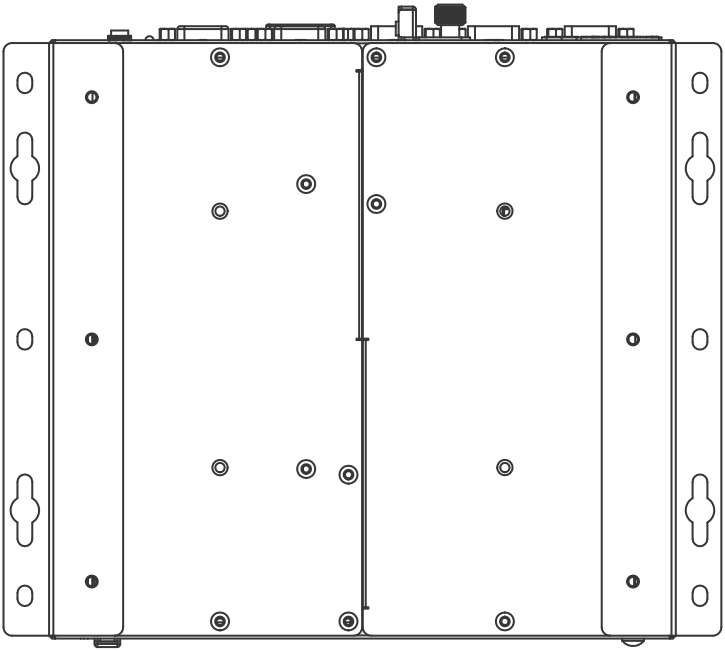


Figure 1-6: Underside View

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1.5 Front Panel I/O Connectors

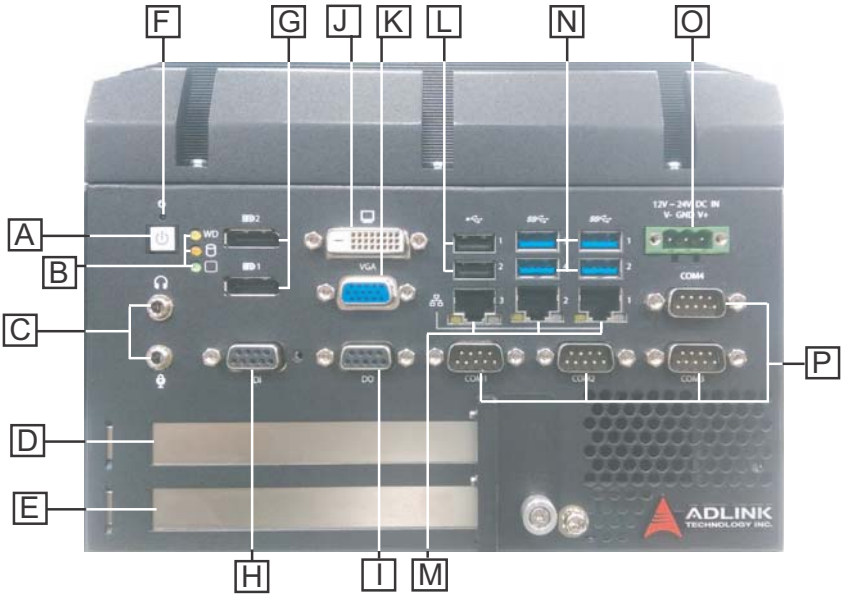


Figure 1-7: Front Panel I/O Connectors

A	Power Button	I	Digital Output
B	LED Indicators	J	DVI-D
C	Audio (Mic, Phones)	K	VGA
D	5V 32-Bit PCI	L	USB 2.0 (Type A) x2
E	PCI express X16	M	Gigabit Ethernet x3
F	Reset Button	N	USB3.0 (Type A) x4
G	DisplayPort x2	O	DC power supply
H	Digital Input	P	COM port x4

Table 1-3: Front Panel I/O Connector Legend

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1.5.1 Power Button

The power button is a non-latched push button with a blue LED indicator. System is turned on when the button is depressed, and the power LED lights. If the system hangs, depress the button for 5 seconds to turn off the system completely.

1.5.2 LED Indicators

In addition to the LED of the power button, three LEDs on the front panel indicate the following.

LED indicator	Color	Description
Watchdog (WD)	Yellow	Indicates watchdog timer status. When watchdog timer starts, the LED flashes. When the timer is expired, the LED remains lit..
Hard disk drive (HD)	Orange	Indicates the HDD operating state. When the SATA hard drive or CFast card is active, the LED indicator flashes.
Diagnostic (DG)	Green	When lit continuously, indicates no physical storage is connected, and if blinking, indicates no memory is installed on either SODIMM socket.

Table 1-4: LED Indicators

1.5.3 PCI Slot

The MVP-6000 provides one PCI slot for expansion on the AVBX-6000-2E1-BP board. Based on the ITE IT8892E PCIe to PCI bridge, connection to the host system is achieved through a PCIe x1 Gen3 interface, supporting universal or 5V PCI 32-bit cards operating at 33MHz clocks.

1.5.4 PCI Express x16 Slot

One PCI express x16 slot supports expansion with standard PCIe Gen3 cards and full PCI express x16 signals.

1.5.5 Reset Button

The reset button executes a hard reset for the MVP-6000.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1.5.6 DisplayPort Connectors

Two DisplayPort connectors on the front panel can connect to VGA, DVI, HDMI and DisplayPort monitors via DisplayPort to VGA adapter cable, DisplayPort to DVI adapter cable, or DisplayPort to HDMI adapter cable and DisplayPort cable.

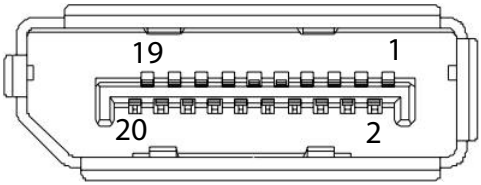


Figure 1-8: DisplayPort Connector

Pin	Signal	Pin	Signal
1	CN_DDPx0+	11	GND
2	GND	12	CN_DDPx3-
3	CN_DDPx0-	13	CN_DDPx_AUX_SEL
4	CN_DDPx1+	14	CN_DDPx_CONFIG2
5	GND	15	CN_DDPx_AUX+
6	CN_DDPx1-	16	GND
7	CN_DDPx2+	17	CN_DDPx_AUX-
8	GND	18	CN_DDPx_HPD
9	CN_DDPx2-	19	GND
10	CN_DDPx3+	20	+V3.3_DDPx_PWR_CN

Table 1-5: DisplayPort Pin Assignments

P/N	Description
30-01119-0010	Passive DisplayPort to HDMI adapter cable
30-01120-0010	Passive DisplayPort to DVI adapter cable
30-01121-0010	Passive DisplayPort to VGA adapter cable
30-01157-0010	Active DisplayPort to DVI adapter cable

Table 1-6: Applicable Cable Types

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Display Options

With computing and graphic performance enhancement from its 6th Generation Intel processor, the MVP-6000 controller can support two independent displays, with configuration as follows.

Display Option 1	Display Option 2
DisplayPort1: 4096x2304@60Hz	DisplayPort 2: 4096x2304@60Hz
DisplayPort1: 4096x2304@60Hz	DVI-D: 4096x2160@60Hz
DisplayPort1: 4096x2304@60Hz	VGA: 1920x1080@60Hz
DisplayPort 2: 4096x2304@60Hz	DVI-D: 4096x2160@60Hz
DisplayPort 2: 4096x2304@60Hz	VGA: 1920x1080@60Hz
DVI-D: 4096x2160@60Hz	VGA: 1920x1080@60Hz

Table 1-7: Maximum Available Resolutions with 2-Display Configuration

1.5.7 Digital I/O Connector

The MVP-6000 provides 8 channels of non-isolation digital input and 8 channels of non-isolation digital output circuits, with spec and circuits as follows.

8-channel Digital Input

- VIH: 2 to 5.25V
- VIL: 0 to 0.8V

8-channel Digital Output

- Output type: Open drain N-channel
- MOSFET driver with internal pull high of 200Ω resistance.
- Source/Sink current for all channels: 24mA
- VOH: 2.4 to 5V
- VOL: 0 to 0.5V

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

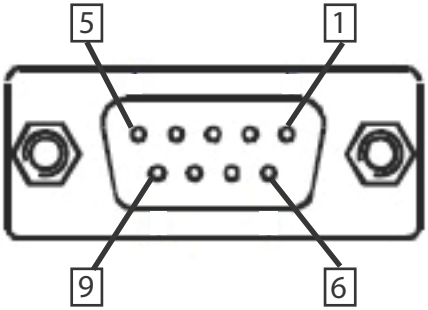


Figure 1-9: Digital I/O Connector Pin Assignment

Pin	Signal
1	DI0
2	DI1
3	DI2
4	DI3
5	DI4
6	DI5
7	DI6
8	DI7
9	DI_GND

Table 1-8: Digital Input Connector Pin Legend

Pin	Signal
1	DO0
2	DO1
3	DO2
4	DO3

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Pin	Signal
5	DO4
6	DO5
7	DO6
8	DO7
9	DO_GND

Table 1-9: Digital Output Connector Pin Legend

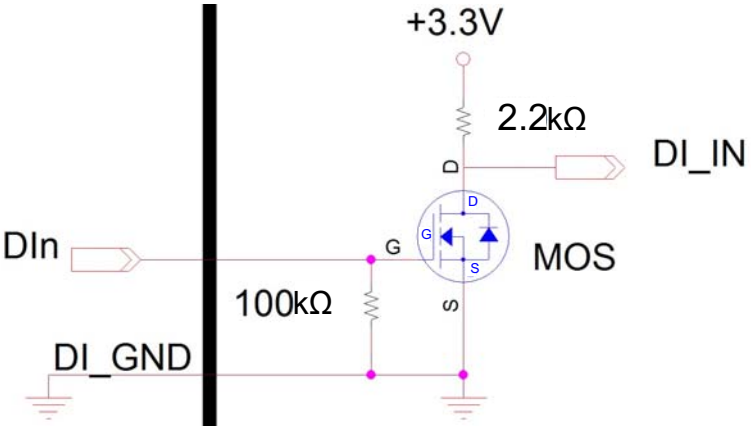


Figure 1-10: Digital Input Circuit

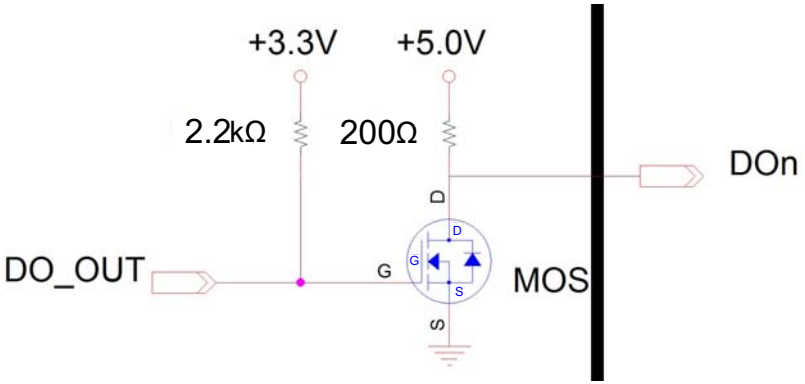


Figure 1-11: Digital Output Circuit

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1.5.8 DVI-D Connector

The MVP-6000 provides one DVI-D connector for connection to an external monitor.



Figure 1-12: DVI-D Connector Pin Assignment

Pin	Signal	Pin	Signal	Pin	Signal
1	DVIdata 2-	9	DVIdata 1-	17	DVIdata 0-
2	DVIdata 2+	10	DVIdata 1+	18	DVIdata 0+
3	GND	11	GND	19	GND
4	N/C	12	N/C	20	N/C
5	N/C	13	N/C	21	N/C
6	DVIDC clock	14	+5V	22	GND
7	DVIDC data	15	GND	23	DVI clock +
8	N/C	16	Hot plug detect	24	DVI clock -

Table 1-10: DVI-D Connector Pin Legend

1.5.9 VGA Connector

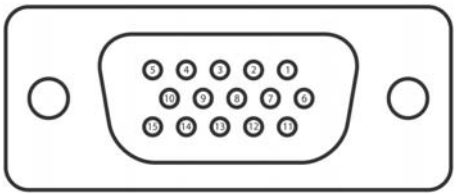


Figure 1-13: VGA Connector Pin Assignment

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Pin	Signal
1	G_VGA_R
2	G_VGA_G
3	G_VGA_B
4	N/C
5	GND
6	GND
7	GND
8	GND
9	N/C
10	GND
11	N/C
12	CRT_DDAT_CN
13	G_VGA_HSYNC
14	G_VGA_VSYNC
15	CRT_DCLK_CN

Table 1-11: VGA Connector Pin Legend

1.5.10 USB 2.0 Ports

The MVP-6000 provides two USB 2.0 ports supporting Type A USB connection on the front panel. All USB ports are compatible with high-speed, full-speed and low-speed USB devices. The MVP-6000 supports multiple boot devices, including USB flash drive, USB external hard drive, USB floppy, USB CD-ROM and others. The boot priority and boot device can be configured in BIOS. Please refer to Section B.4: Boot on page 61 for details.

1.5.11 Gigabit Ethernet Ports


Three Gigabit Ethernet ports on the front panel support Intel WGI211AT Gigabit Ethernet PHY control.

WGI211AT provides:

- IEEE 802.3az Energy Efficient Ethernet
- IEEE 1588/802.1AS precision time synchronization

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

- IEEE 802.3Qav traffic shaper
- Interrupt moderation, VLAN support, IP checksum offload
- RSS and MSI-X to lower CPU utilization in multi-core systems
- ECC - error correcting memory in packet buffers
- Wake-On-LAN
- Preboot eXecution Environment (PXE) flash interface
- Jumbo frame support

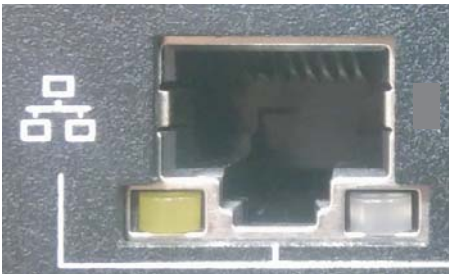

Active/Link Yellow	Speed LED Green/Orange

Figure 1-14: Ethernet Port and LED Legend

LED Color	Status	Description
Yellow	OFF	Ethernet port is disconnected.
	ON	Ethernet port is connected with no activity.
	Flashing	Ethernet port is connected and active.

Table 1-12: Active/Link LED Indicators

LED Color	Status	Description
Green/Orange	OFF	10 Mbps
	Green	100 Mbps
	Orange	1000 Mbps

Table 1-13: Speed LED Indicators

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1.5.12 USB 3.0 Ports

The MVP-6000 provides four USB 3.0 ports supporting Type A USB3.0 connection on the front panel. All USB3.0 ports are compatible with super-speed, high-speed, full-speed and low-speed USB devices, except USB 3.0 port #1, which supports only super-speed devices.

1.5.13 DC Power Connector

The DC power supply connector of the MVP-6000 is on the front panel. The power supply connector consists of three pins, V+, chassis ground, and V- from right to left respectively. V+ and V- pins provide DC power input and the chassis ground pin allows connection of the chassis to ground for better EMC compatibility. The DC power input for the MVP-6000 allows a voltage input range from 12VDC to 24VDC.

WARNING:

Ensure that the DC power supply:

- is within the input voltage range defined in the specification
- is stable and low-noise DC
- provides sufficient operating current

DC power supply over or under voltage, unstable, or of insufficient power may cause system instability and physical damage



Figure 1-15: DC Power Connector

Pin	Signal
1	V+ (DC_IN)
2	GND (CHGND)
3	V- (DGND)

Table 1-14: DC Power Supply Connector Signals

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1.5.14 COM Port Connectors

The MVP-6000 provides four COM ports through D-sub 9 pin connectors. The COM1 & COM2 ports support RS-232/422/485 modes by BIOS setting, while COM3 and COM4 support only RS-232.

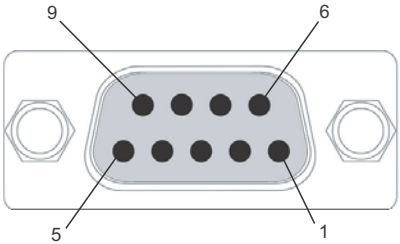


Figure 1-16: COM Port

Pin	Signal Name		
	RS-232	RS-422	RS-485
1	DCD#	TXD422-	485DATA-
2	RXD	TXD422+	485DATA+
3	TXD	RXD422+	N/S
4	DTR#	RXD422-	N/S
5	GND	N/S	N/S
6	DSR#	N/S	N/S
7	RTS#	N/S	N/S
8	CTS#	N/S	N/S
9	RI#	N/S	N/S

Table 1-15: D-Sub 9p Signal Function of COM Ports

1.6 Rear-Mounted CFast Host Connector

The MVP-6000 is equipped with a Type II Push Push CFast host connector on the rear panel, by SATA interface. Data transfer rates up to 3.0Gb/s(300MB/s)/1.5Gb/s(150MB/s) are supported. The host SATA controller provides a legacy operating mode using

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

I/O space, and an AHCI operating mode using memory space. The CFast card can function as a storage device for system installation.

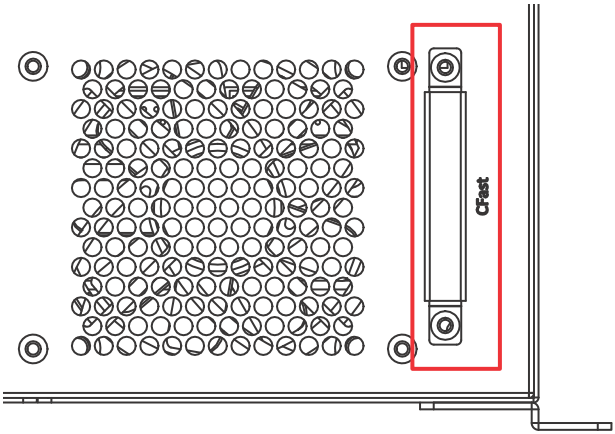


Figure 1-17: CFast Host Connector (on rear panel)

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1.7 Internal I/O Connectors

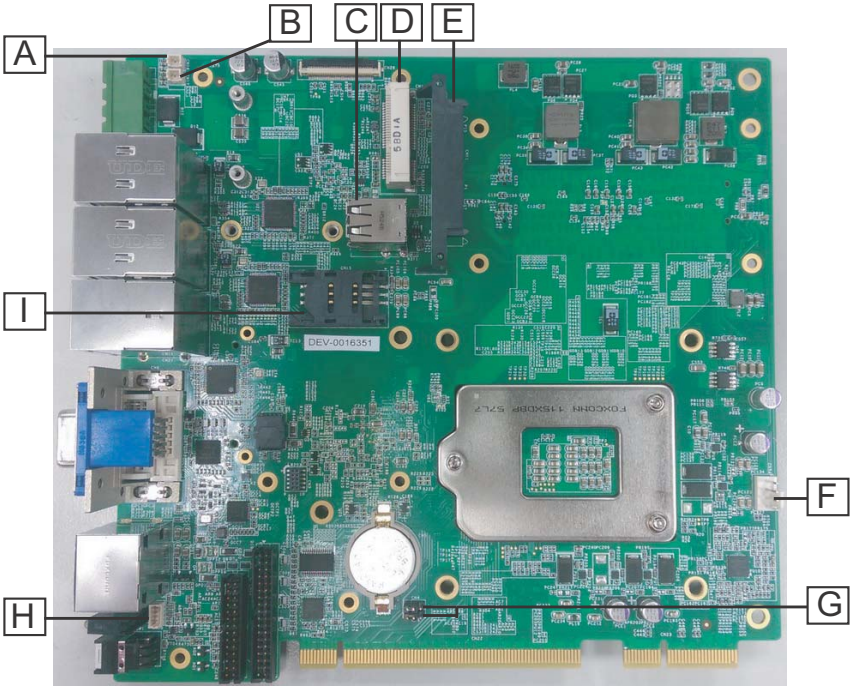


Figure 1-18: Mainboard I/O Connectors

A	GPS module 5V power header
B	GPS module 3.3V power header
C	USB2.0 connector
D	Mini-PCIe connector
E	SATA connector
F	9V fan connector
G	Jumpers: ▶ Clear CMOS (upper) ▶ N/C (lower)
H	Extended PWR/RESET header
I	USIM slot

Table 1-16: Mainboard Connector Legend

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

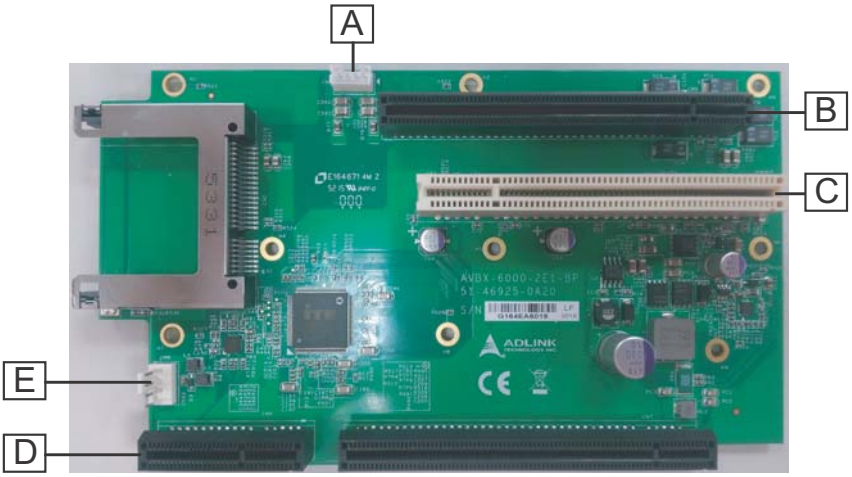



Figure 1-19: Backplane Board PCB

A	12V power for add-on card
B	PCI express x16 slot
C	PCI slot
D	Backboard to mainboard PCB connector
E	12V fan connector

Table 1-17: Backplane Board Connector Legend

1.7.1 GPS Module Power Headers

Power supply via cable for mini PCIE GPS module cards is provided in both 5V and 3.3V voltages. Pin #1 is on the right.



LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

	3.3V
CN16	+V5_GPS
CN17	+V3.3_GPS

Pin	3.3V	5V
1	+V3.3_GPS	+V5_GPS
2	GND	

1.7.2 USB 2.0 Connector

One onboard USB 2.0 Type-A connector is provided for the internal USB dongle, with only the upper port functional.

1.7.3 Mini-PCIe Connector

The internal mini-PCIe connector (Rev. 1.2) supports full size mini-PCIe cards.


1.7.4 SATA Connector

The SATA connector supports transfer up to 6.0Gb/s(600MB/s).

1.7.5 9V Fan Connector

DC 9V fan module power supply is provided through the connector, to which the optional fan module connects when installed in the chassis.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000



Pin	Signal
1	FAN_GND
2	P_+9V0_FAN1
3	FAN_TACH_CN
4	FAN_PWM_CN

1.7.6 Clear CMOS Jumper

Upon encountering an abnormal condition preventing the MVP-6000 from booting, the jumper can clear the BIOS content stored in CMOS and restore default settings. To clear CMOS, short pin #2 to pin #3 for a minimum of 3 seconds, and then remove the jumper to return to normal mode.




Figure 1-20: Clear CMOS Jumper Setting

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1.7.7 Extended PWR/RESET header

An internal header is provided for the Power and Reset buttons, with pin assignment as shown.



Pin	Signal
1	PWR_BTN-L
2	GND
3	GND
4	RESET_BTN-L

1.7.8 USIM Slot

The USIM slot connects to the Mini-PCIe slot.

1.7.9 12V Power for Add-on Card

The MVP-6000 provides one power pin header with +5V and +12V DC power (with 12V default, 5V available by request), providing access for PCI and PCI express card external power supplies.

Please refer to Section A.2:Power Supply Reference for +5V and +12V connector power supply specifications

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000



Pin	Signal
1	+12V
2	GND
3	GND
4	+5V

1.7.10 Backboard to System PCB Connector

This connector connects the backboard to a golden finger-equipped mainboard PCB.

1.7.11 12V DC Fan Connector



Pin	Signal
1	FAN_GND
2	P_+12V0_FAN1
3	FAN_TACH_CN
4	FAN_PWM_CN

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

The MVP-6000 provides a DC 12V to USB connector for fan module power. The optional fan module connects to the connector when assembled to the chassis.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

This page intentionally left blank.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2 Getting Started

2.1 Unpacking Checklist


Before unpacking, check the shipping carton for any damage. If the shipping carton and/or contents are damaged, inform your dealer immediately. Retain the shipping carton and packing materials for inspection. Obtain authorization from your dealer before returning any product to ADLINK. Ensure that the following items are included in the package.

- MVP-6000 controller
- Accessory pack
- Screw pack for wall-mounting and HDD installation
- User's Manual
- ADLINK All-in-One DVD


2.2 Installing Hard Disk Drives

1. Remove the 13 bottom cover screws by screwdriver

..

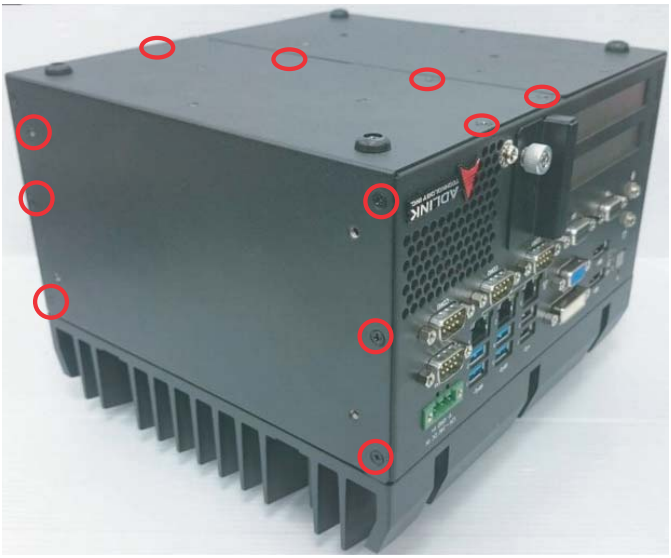


Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

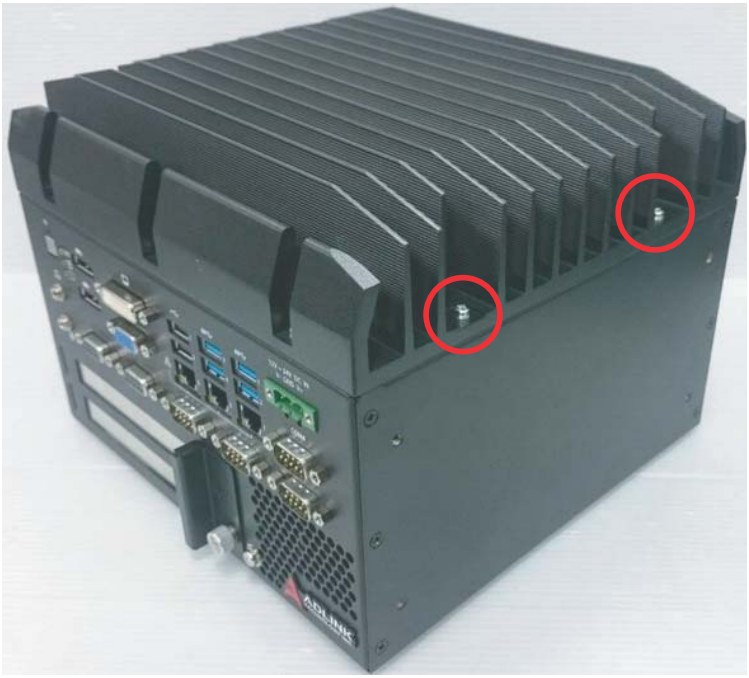

2. Remove the bottom cover by lifting.



3. Remove the 5 bracket screws and withdraw the bracket.

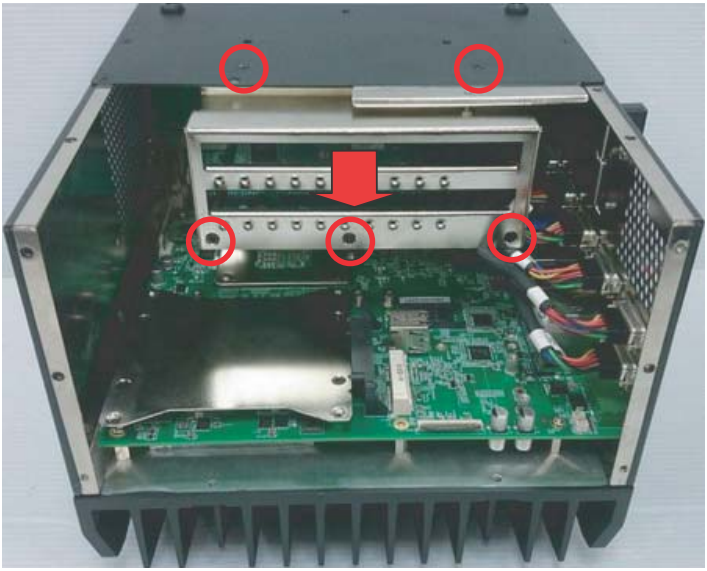

4. Use 4 of the included M3 screws to fix a 2.5" HDD or SSD unit to the bracket..



5. Gently depress the drive into the SATA connector on the PCB.



6. Use 4 of the included M3 screws to mount the drive..



7. Replace the bottom cover and refasten screws.

2.3 Installing CFast Cards

1. Remove the screws fixing the CFast socket cover.



2. True the CFast card with the alignment guide.



3. Gently insert the CFast card until it is firmly seated in the

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

socket.



4. Replace the socket cover and screws.

2.4 Wall-mounting the MVP-6000

NOTE: All dimensions shown are in mm (millimeters).

CAUTION: Due to the presence of ventilation holes, for safety, the device should ONLY be wall-mounted with the front and rear panels on the sides, NEVER on the top or underside.


The MVP-6000 is shipped with wall-mount brackets and accessory screws. To wall-mount the MVP-6000:

1. Remove the 6 plastic pads from the corners.



2. Use the 6 M4 screws shipped with the controller to fix the 2 wall-mount brackets, also included, to the chassis, according to the spacing dimensions of the screw holes and brackets, as shown.



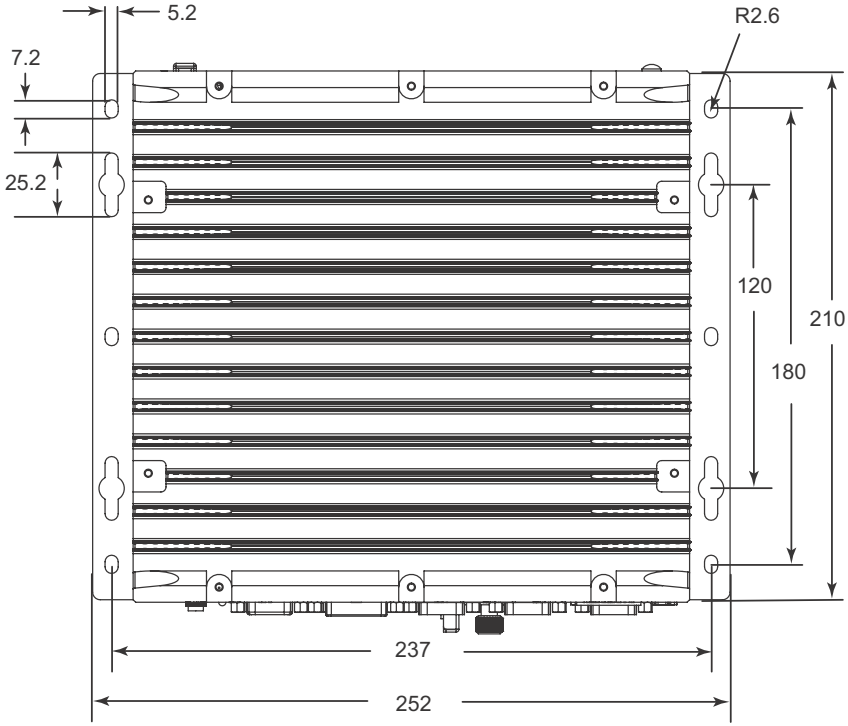

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

3. Once final assembly as shown is complete, mount the MVP-6000 on the wall via screw holes.



2.5 Driver Installation

Download requisite drivers, as follows, for your system from http://www.adlinktech.com and install.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

The following drivers must be installed:

- Chipset driver
- Graphics driver
- Ethernet driver
- Audio driver
- USB 3.0 driver
- Intel Management Engine driver
- Serial I/O driver

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Appendix A Power Consumption

NOTE: Information in this Appendix is for power budget planning and design purposes only. Actual power consumption may differ based on final application.

A.1 Power Consumption Reference

Power consumption as follows is based on lab data in which 24V DC is applied and current is measured by the DC power supply. The power consumption (W) is calculated as the product of applied voltage (V) and the current (A).

Platforms tested for this data have available external I/O interfaces, and are attached to supported devices such as VGA and DVI monitors, CFast card, PS2 keyboard/mouse, USB dummy load, SATA HDD/SSD, COM loopback, and audio loopback, and an internal hard disk driver is installed.

No internal PCI/PCIe/mini PCIe slots are occupied.

Information is presented for reference only. Actual power consumption will vary with different attached devices and platform operations.

Power Supply: 24VDC	Power Off	System Idle	System Full Load	Recommended Power Supply
Integrated Embedded Computer				
MVP-6000 i7	2.9 W	19.68 W	53.52 W	160W
MVP-6000 i5	2.9 W	18.26 W	52.18W	160W
MVP-6000 i3	2.9 W	17.9 W	50.66 W	160W

Table A-1: Power Consumption

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

NOTE:

- Sufficient power supply for the entire system is required to meet these specifications. At least 100W at 24V input is recommended.
- Heat generated by add-on PCI/PCIe adapters affects thermal stability. Additional heat dissipation is required when the system operates at high temperatures or in harsh environments with add-on adapters.
- Power supply specifications shown are for total power consumption of all PCI/PCIe slots at once, not for single slot use.

A.2 Power Supply Reference

+3.3V Power Rail	Maximum 7A	Total Power Supply Max. 50W
+5V Power Rail	Maximum 5A	
+12V Power Rail	Maximum 2A	
-12V Power Rail	Maximum 0.2A	
CN1 +12V	Maximum 1A	
CN1 +5V	Maximum 1A	

Table A-2: Power Supply

A.3 Accessory Cabling

Power supply to add-on cards is provided by the auxiliary power cable (from CN1 to Molex 8981), Part Number 30-20724-0000.



Yellow	12V	Black	GND
Black	GND	Red	5V

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Appendix B BIOS Setup

The Basic Input/Output System (BIOS) is a program that provides a basic level of communication between the processor and peripherals. In addition, the BIOS also contains codes for various advanced features applied to the MVP-6000. The BIOS setup program includes menus for configuring settings and enabling features of the MVP-6000. Most users do not need to use the BIOS setup program, as the MVP-6000 ships with default settings that work well for most configurations.

Enter BIOS setup by selecting DEL when the system is powered on the POST (Power On Self Test) message is displayed.The MVP-6000 controller supports one-time Boot Menu allowing selection of boot device. Enter the Boot Menu by selecting F7 at POST.


NOTE:

- BIOS options listed are for reference only.
- Different configurations can afffect BIOS behavior.
- Displayed material may reflect only the BIOS version corresponding to initial release and may differ from that of the purchased motherboard.
- Users are welcome to download the latest BIOS version from our official website.


B.1 Main

Contains basic system information for the MVP-6000.


WARNING:

Changing BIOS settings may lead to incorrect controller behavior and possible inability to boot. In such a case, Section 1.7.6:Clear CMOS Jumper provides instruction on clearing the CMOS and restoring default settings

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

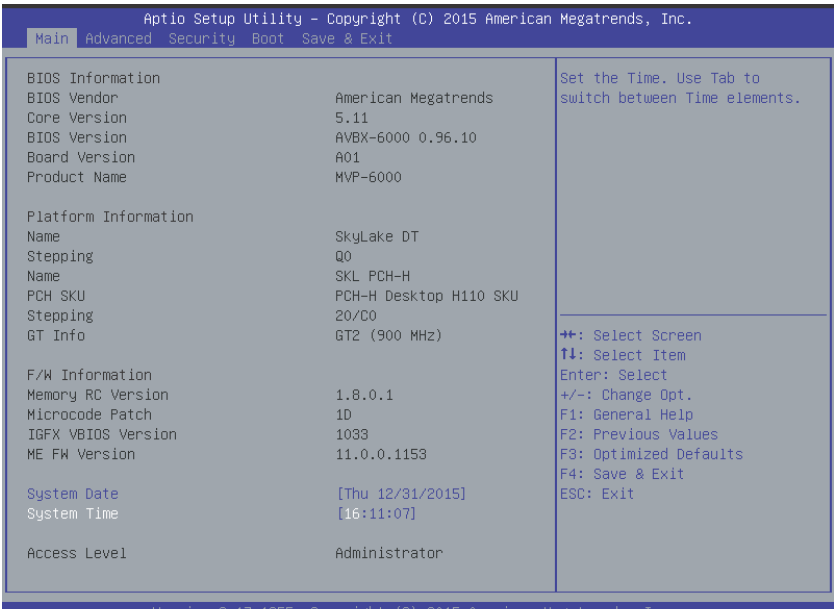

BIOS Information

Shows current system BIOS Vendor, Core Version, BIOS Version, Board Version and Product Name.

Platform Information

Shows current system Platform Name, CPU Stepping, PCH SKU, PCH Stepping and GT information.

FW Information

Shows current system Memory RC version, Microcode Path, IGFX VBIOS version and ME FW version.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


System Time/System Date

Allows adjustment of system time and date, as follows.

1. Highlight System Time or System Date using the up and down <Arrow> keys
2. Enter new values using the keyboard and select <Enter>
3. Select < Tab > to move between fields.

NOTE: The date must be entered in MM/DD/YY format, and the time in HH:MM:SS. The time is in 24-hour format. For example, 5:30 A.M. appears as 05:30:00, and 5:30 P.M. as 17:30:00.

B.2 Advanced

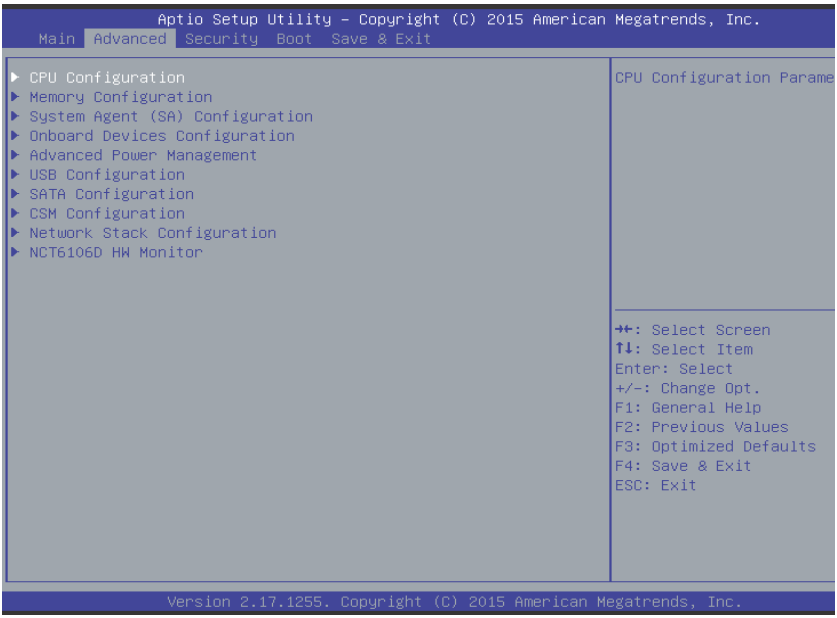



CAUTION: Setting incorrect or conflicting values in Advanced BIOS Setup may cause system malfunction

Accesses advanced options of the MVP-6000.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

B.2.1CPU Configuration

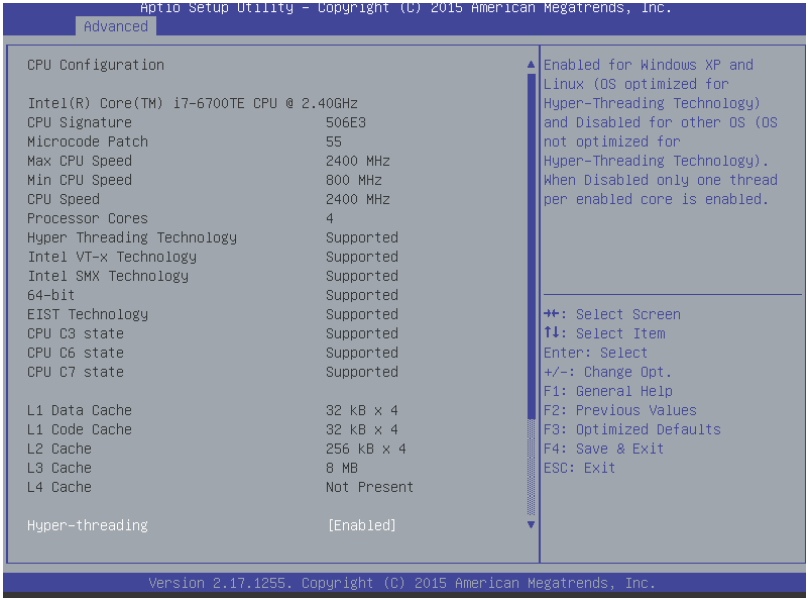

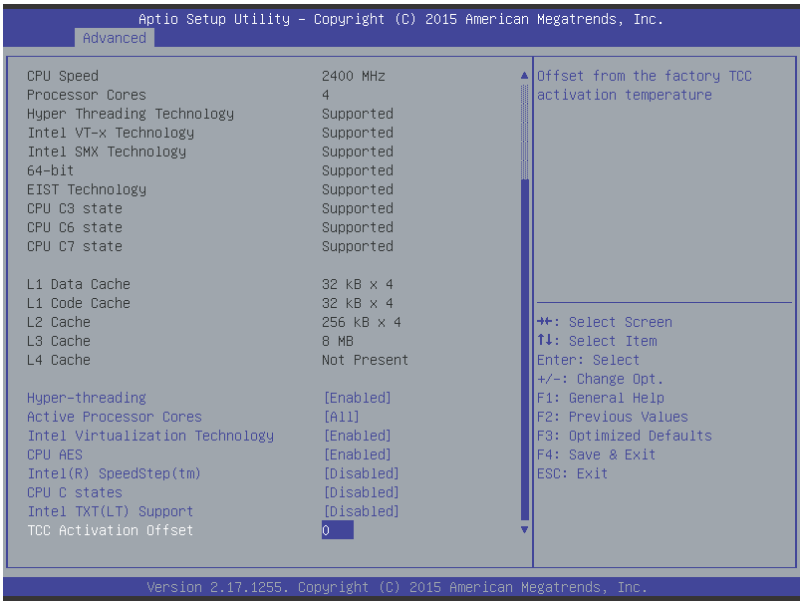

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Hyper-Threading

Enabled for Windows XP and Linux (optimized for Hyper-Threading Technology) and Disabled for other OS (not optimized for Hyper-Threading Technology). When Disabled only one thread per enabled core is enabled.

Active Processor Cores

Number of cores to enable in each processor package.

Intel Virtualization Technology

When enabled, a VMM can utilize the additional hardware capabilities provided by Vanderpool Technology.

CPU AES

Enable/Disable CPU Advanced Encryption Standard instructions.

Intel(R) SpeedStep(tm)

Allows more than two frequency ranges to be supported.

CPU C States

Enable or disable CPU C states.

Intel TXT(LT) Support


Enables or Disables Intel(R) TXT(LT) support.

TCC Activation Offset

Offset from the factory TCC activation temperature.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


B.2.2 Memory Configuration

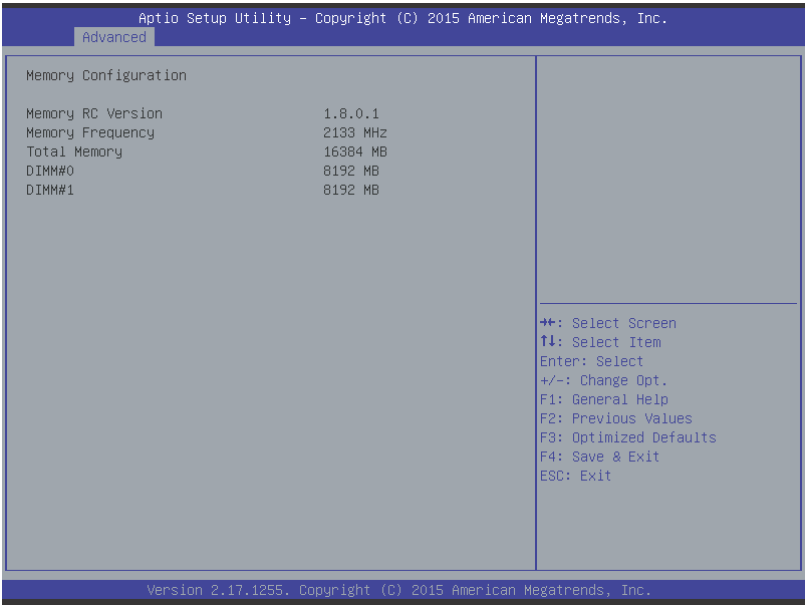

Shows current system Memory RC Version and values for memory frequency, total memory, DIMM#0, and DIMM#1.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

B.2.3 System Agent (SA) Configuration

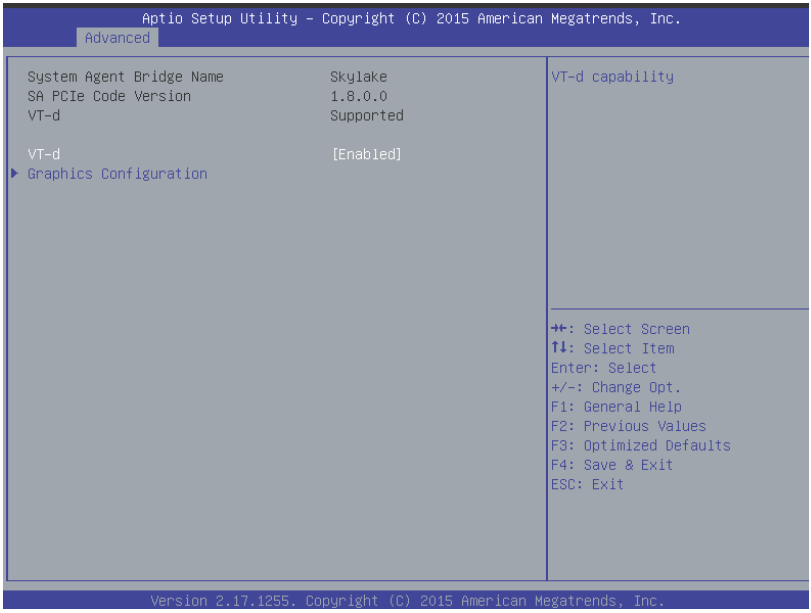


VT-d

Enables/disables VT-d capability.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

B.2.4 Graphics Configuration

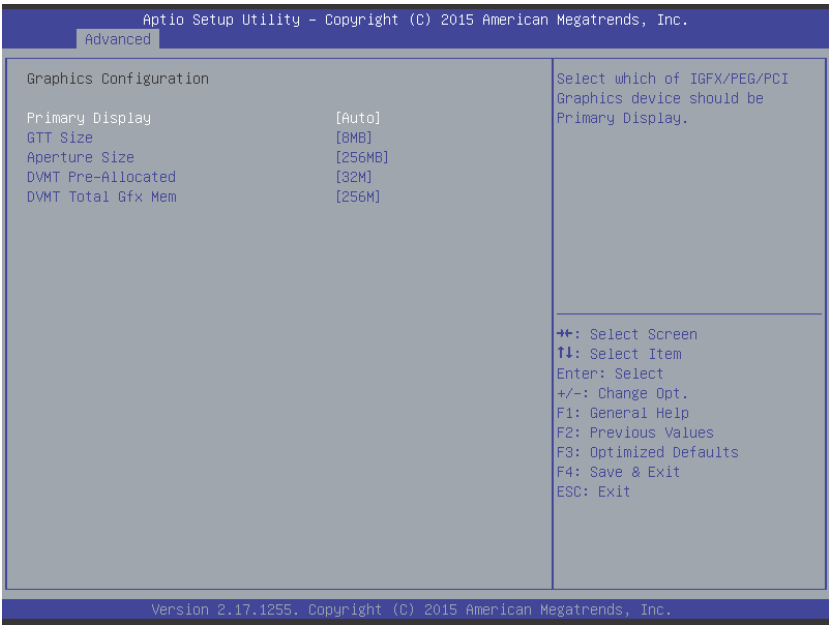

Primary Display

Sets the IGFX/PEG/PCI graphics device to be primary display.

GTT Size

Sets GTT size.

Aperture Size

Sets aperture size, with MMIO BIOS assignment exceeding 4GB automatically enabled when 2048MB aperture is selected, available when CSM Support is disabled.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


DVMT Pre-Allocated

Sets size of DVMT 5.0 pre-allocated (fixed) graphics memory used by the internal graphics device.

DVMT Total Gfx Mem

Sets size of DVMT5.0 total graphic memory used by the internal graphics device.

B.2.5 Onboard Device Configuration

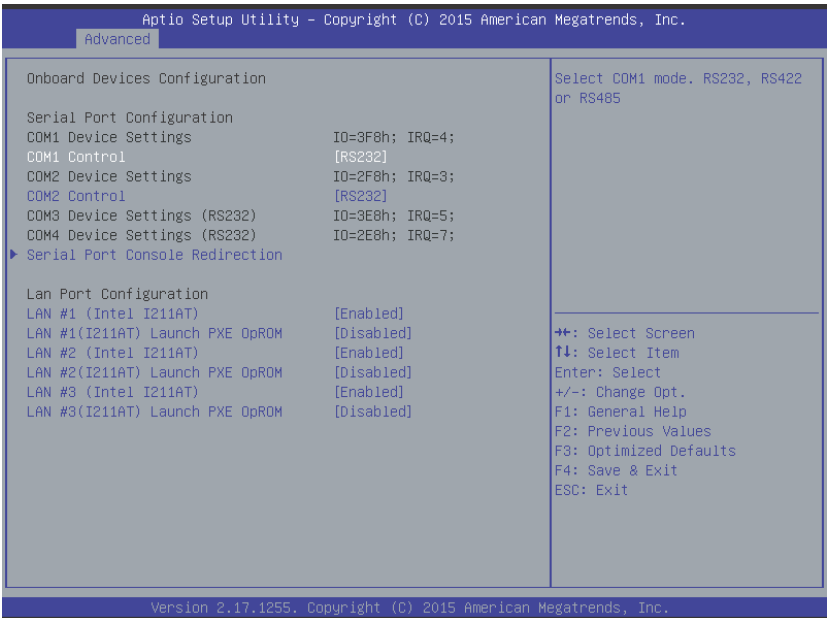

Serial Port 1 to 4 Configuration

Sets port type (RS-232/422/485) for Serial Ports 1 and 2 only.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

LAN #1 (Intel I211AT)

Enables/Disables onboard Intel I211AT LAN controller.

LAN #1(I211AT) Launch PXE OpROM

Enables or disables execution of LAN boot-rom to add boot option for legacy network devices.

LAN #2 (Intel I211AT)

Enables/Disables onboard Intel I211AT LAN controller.

LAN #2(I211AT) Launch PXE OpROM

Enables or disables execution of LAN boot-rom to add boot option for legacy network devices.

LAN #3 (Intel I211AT)


Enables/Disables onboard Intel I211AT LAN controller.

LAN #3(I211AT) Launch PXE OpROM

Enables or disables execution of LAN boot-rom to add boot option for legacy network devices.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Serial Port Console Redirection

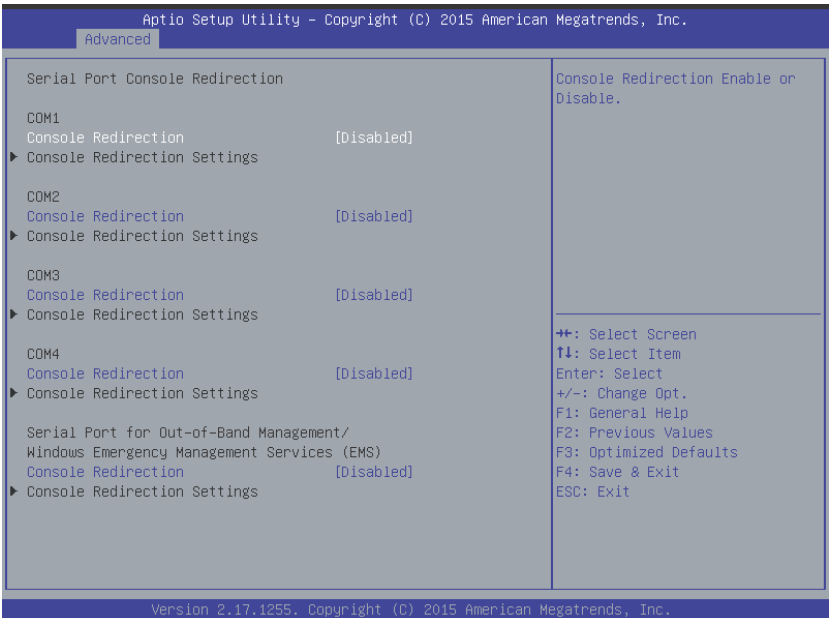

Console Redirection


Enables console redirection on COM 1 to 4 and EMS COM.

Console Redirection Settings

Sets miscellaneous parameters for COM Ports 1 to 4 and EMS COM.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

B.2.6 Advanced Power Management

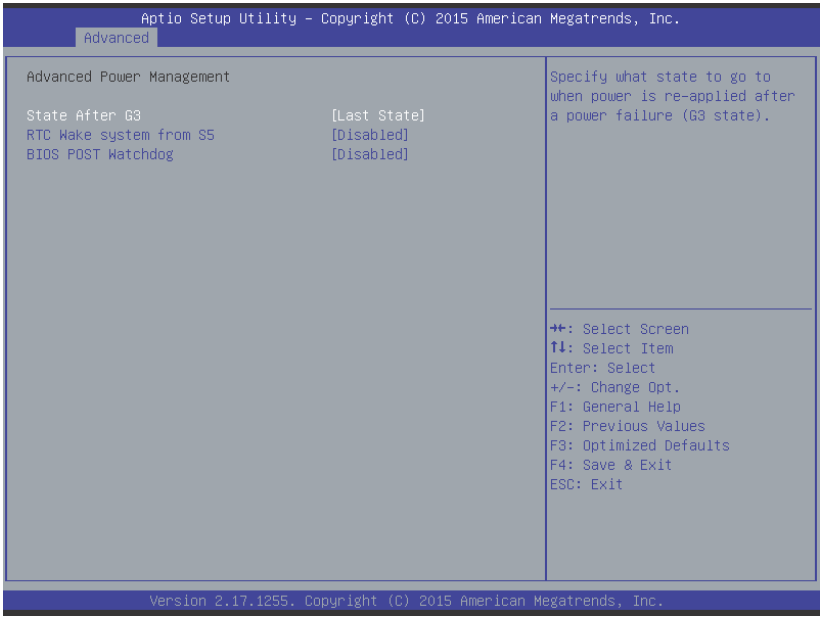

State After G3

Determines the state the computer enters when power is restored after power loss, from among Last State, Power On, and Power Off

Option	Description
Power Off	Retains system power off after power is restored
Power On	Powers the system up when power is restored
Last State	When power is restored, returns the system to the state in which power was interrupted

State After G3

Sets the state entered when power is re-applied after a power failure (G3 state).

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


RTC Wake system from S5

Enable or disable system wake on alarm event, with FixedTime waking the system at the hr/min/sec specified, and DynamicTime waking the system at the current time + Increase minute(s).

BIOS POST Watchdog

From among Disabled, Second Mode and Minute Mode.

B.2.7 USB Configuration

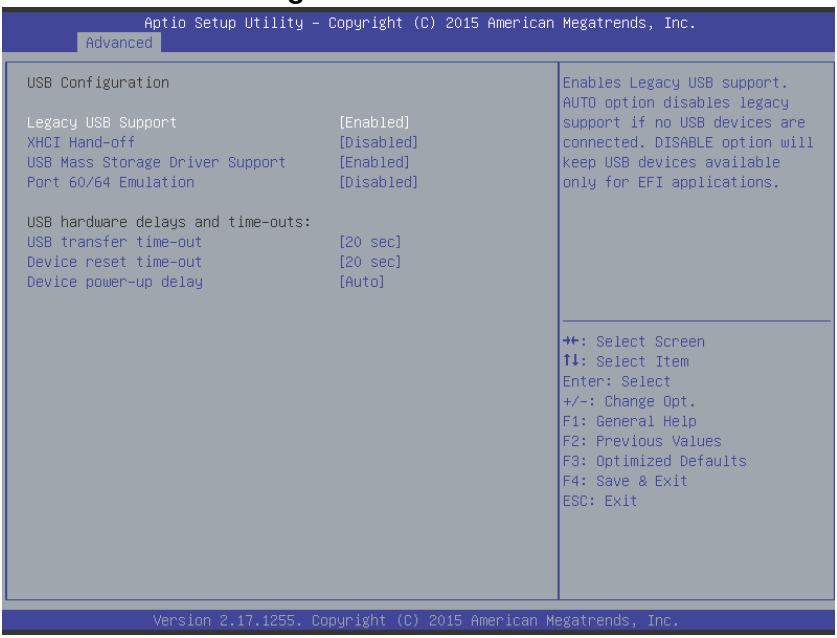

Legacy USB Support

With AUTO disabling legacy support if no USB devices are connected, and DISABLE keeping USB devices available only for EFI applications.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

XHCI Hand-off

A workaround for OS without XHCI hand-off support, where XHCI ownership change should be claimed by the XHCI driver.

USB Mass Storage Driver Support

Enable/Disable USB mass storage driver support.

Port 60/64 Emulation

Enables I/O port 60h/64h emulation support, should be enabled for complete USB keyboard legacy support for OS not recognizing USB ports.

USB transfer time-out

Timeout value for Control, Bulk, and Interrupt transfers.

Device reset time-out


USB mass storage device Start Unit command timeout.

Device power-up delay

Maximum time taken before the device reports itself to the Host Controller, with Auto using a default value of 100 ms for a Root port, and for Hub port the delay is taken from the Hub descriptor.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

B.2.8 SATA Configuration

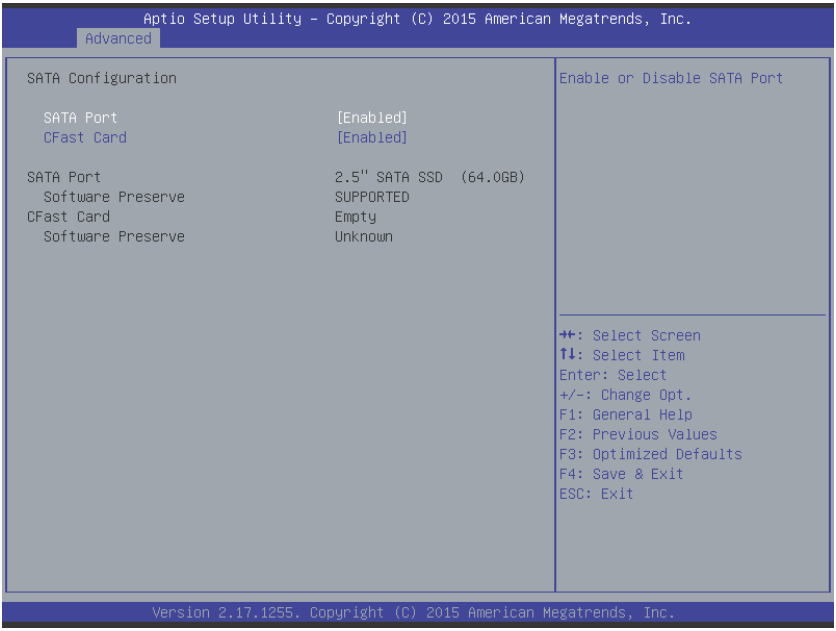


SATA Port and CFast Card

Enable or Disable SATA Port and CFast Card.

for Hub port the delay is taken from the Hub descriptor.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

B.2.9 CSM Configuration

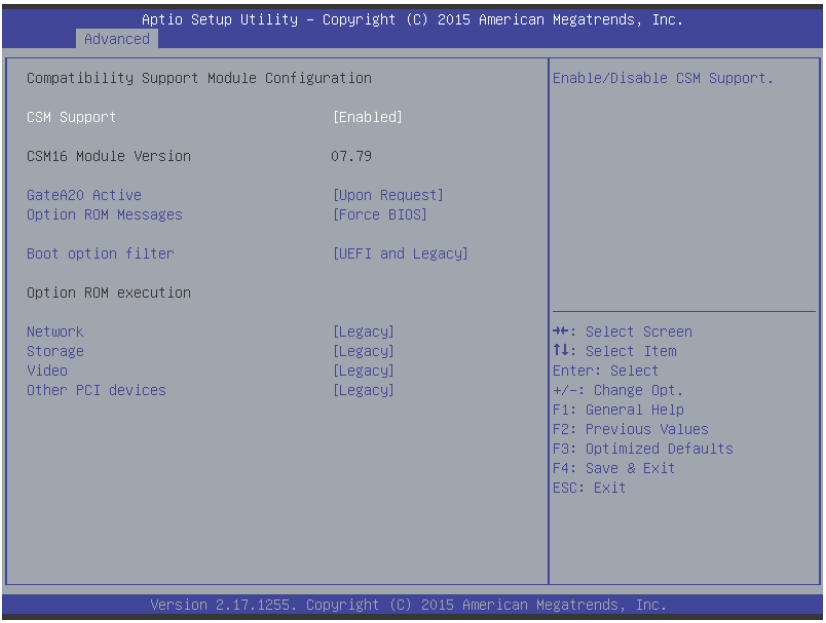

CSM Support

Enable or Disable CSM Support.

GateA20 Active

UPON REQUEST disables GA20 using BIOS services, and ALWAYS prevents GA20 from being disabled, useful when any RT code exceeding 1MB is executed.

Option ROM Messages

Sets display mode for Option ROM.

Boot option filter

Controls Legacy/UEFI ROM priority.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Network

Controls execution of UEFI and Legacy PXE OpROM.

Storage

Controls execution of UEFI and Legacy Storage OpROM.

Video


Controls execution of UEFI and Legacy Video OpROM.

Other PCI devices

Determines OpROM execution policy for devices other than Network, Storage, and Video.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

B.3 Security

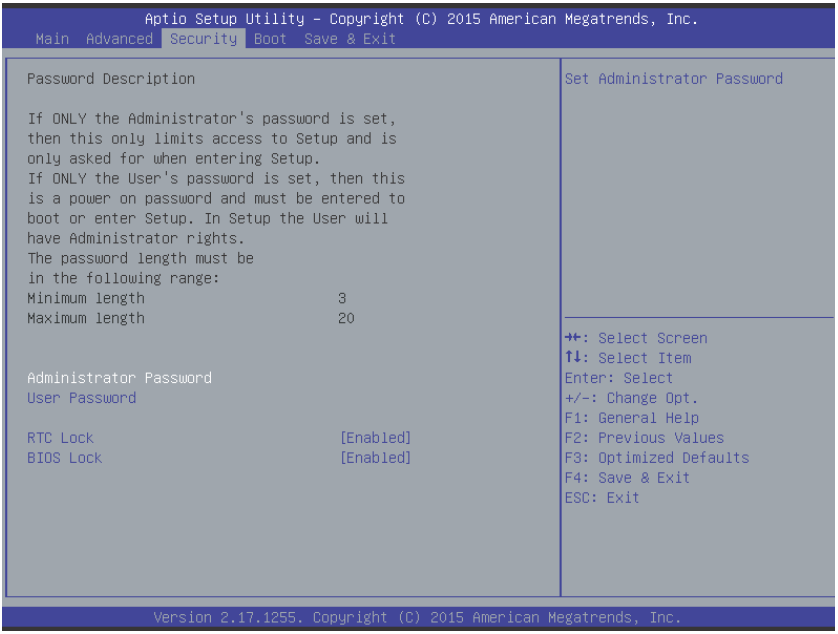

If only the Administrator password is set, access s limited and the password requested on Setup. If User password is set, it acts as a power-on password and must be entered to boot or enter setup. In Setup the user receives

Administrator Password

Sets Administrator Password.

User Password

Sets User Password.

RTC Lock


Enable locks bytes 38h-3Fh in the lower/upper 128-byte bank of RTC RAM.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

BIOS Lock

Enable/Disable the PCH BIOS Lock (BLE bit).

B.4 Boot

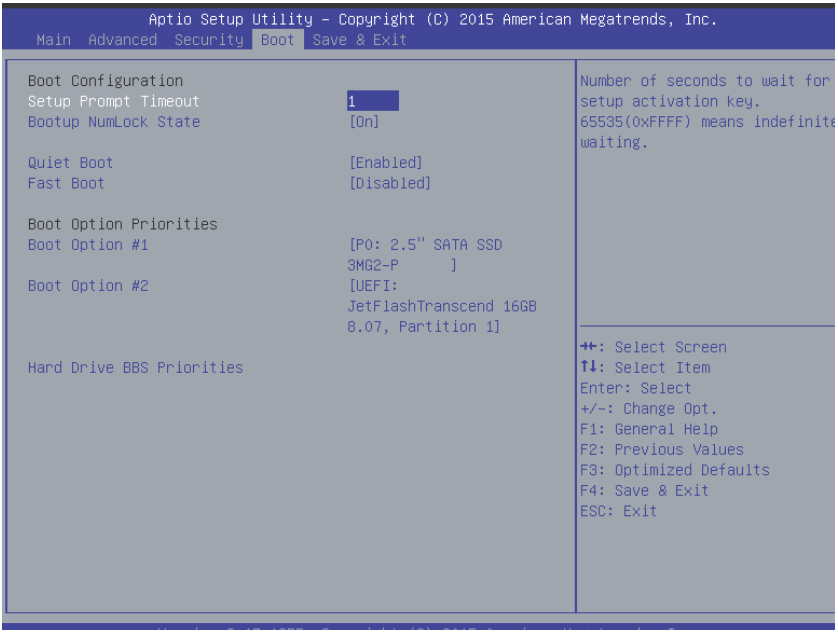

Setup Prompt Timeout

Number of seconds before setup activation key is launched, with 65535(0xFFFF) setting indefinite waiting.

Bootup Num-Lock State

Sets keypad Number Lock status following boot.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Quiet Boot

Option	Description
Disabled	Directs BIOS to display POST messages
Enabled	Directs BIOS to display the OEM logo.

Fast Boot

Option	Description
Disabled	Directs BIOS to perform all POST tests.
Enabled	Directs BIOS to skip certain POST tests to boot faster.


While enabling Fast Boot can reduce system ready time, some prerequisites can reduce effectiveness

Boot Option Priorities

Specifies the priority of boot devices, all of which are detected during POST and displayed. Target Boot Option # and click to select the desired device

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


Hard Drive BBS Priorities

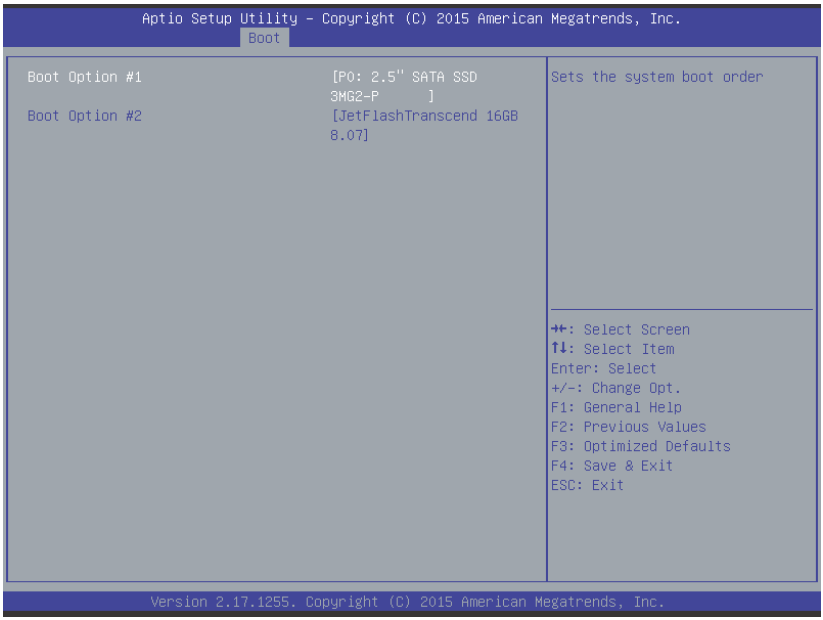

Specifies the priority of boot devices. All installed boot devices are detected during POST and displayed. Target Boot Option # and click to select the desired device.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

B.5 Save & Exit

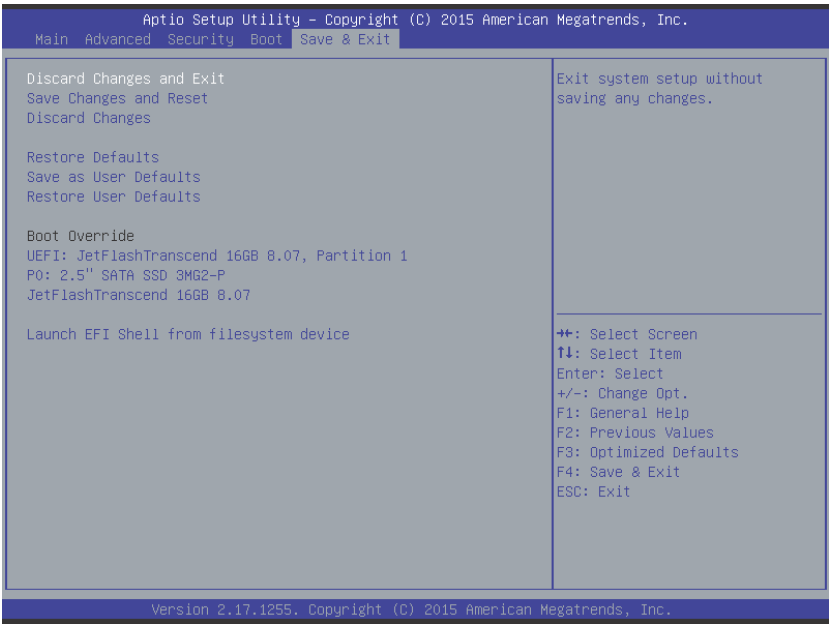

Discard Changes and Exit

Discards all changes and exits BIOS setup

Save Changes and Reset

Saves all changes and reboots the system, with new settings taking effect

Discard Changes

Resets system setup without saving any changes

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Restore Defaults

Sets all BIOS options to default settings, designed for maximum system stability but less than maximum performance. Select Restore Defaults if the computer encounters system configuration problems.

Save as User Defaults

Saves all changes to this point as user defaults

Restore User Defaults

Restores user defaults to all setup options

Launch EFI Shell from filesystem device

Attempts to launch EFI Shell application (Shell.efi) from one of the available filesystem devices

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

This page intentionally left blank.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Appendix C Watchdog Timer (WDT) Function Library

This appendix describes use of the watchdog timer (WDT) function library for the MVP-6000 controller. The watchdog timer is a hardware mechanism provided to reset the system if the operating system or an application stalls. After starting, the watchdog timer in the application must be periodically reset before the timer expires. Once the watchdog timer expires, a hardware-generated signal is sent to reset the system.

C.1 WDT with API/Windows

Matrix WDT API library files and a demo program (incl. source code) can be found on the included driver CD or downloaded from http://www.adlinktech.com.

To use the WDT function library for MVP-6000, include the header file WDT.h and linkage library WDT.lib in the C++ project.

InitWDT

Initializes the watchdog timer function. Must be called before the invocation of any other WDT function.

Syntax

C/C++

```
BOOL InitWDT()
```

Parameters

None

Return codes

TRUE if watchdog timer is successfully initialized.

FALSE if watchdog timer fails to initialize.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

SetWDT

Sets the timeout value of the watchdog timer. There are two parameters for this function to indicate the timeout ticks and unit. ResetWDT or StopWDT should be called before the expiration of watchdog timer, or the system will reset.

Syntax

C/C++

```
BOOL SetWDT(BYTE tick, BYTE unit)
```

Parameters

`tick`

Specify the number of ticks for watchdog timer. A valid value is 1 - 255.

`unit`

Specifies the timeout ticks of the watchdog timer.

Value	Description
0	The unit for one tick is one second. For example, when one tick is specified as 100 and the unit as 0, the timeout value is 100 seconds.
1	The unit for one tick is one minute. For example, whenone tick is specified as 100 and the unit as 1, the timeout value is 100 minutes.

Return codes

TRUE if timeout value of watchdog timer is successfully set.

FALSE if timeout value of watchdog timer is failed to set.

StartWDT

Start the watchdog timer function. Once the StartWDT is invoked, the watchdog timer starts. ResetWDT or StopWDT should be called before the expiration of watchdog timer, or the system will reset.

Syntax

C/C++

```
BOOL StartWDT()
```


LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Parameters

None

Return codes

TRUE if watchdog timer is successfully started.

FALSE if watchdog timer is failed to start.

ResetWDT

Reset the watchdog timer. The invocation of ResetWDT allows restoration of the watchdog timer to the initial timeout value specified in SetWDT function. ResetWDT or StopWDT should be called before the expiration of the watchdog timer, or the system will reset.

Syntax

C/C++

```
BOOL ResetWDT()
```

Parameters

None

Return codes

TRUE if watchdog timer is successfully reset.

FALSE if watchdog timer fails to reset.

StopWDT

Stops the watchdog timer.

Syntax

C/C++

```
BOOL StopWDT()
```

Parameters

None

Return codes

TRUE if watchdog timer is successfully stopped.

FALSE if watchdog timer fails to stop.

C.2 WDT with DOS/Linux

Under Linux, please program WDT function using the same LPC IO registers according to the sample program as follows.

```
#include <dos.h>
#include <stddef.h>
#include <stdio.h>
/* Config LPC IO NCT6102D to enter config mode */
EnterConfig(void)
{
outp(0x4E, 0x87);
outp(0x4E, 0x87);
}
/* Config LPC IO to exit config mode */
ExitConfig(void)
{ outp(0x4E, 0xAA);
 }
/* Read byte from LPC IO register */
unsigned char r_reg(unsigned char regoffset)
{ outp(0x4E, regoffset);
return inp(0x4F); }
/* Write byte to LPC IO register */
void  w_reg(unsigned  char  regoffset,  unsigned  char
data)
{ outp(0x4E, regoffset); outp(0x4F, data);
}
main(void)
{
unsigned int    count;
/* print program title  */
```

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

```
printf("-----------------MXC-6400 WDT Demo------------
-----\n");
printf("Init          and          config          GPIO
ports<<<<<<<<<<<<<<<<<<<<<<<<\n");
printf("-----------------------------------------------
----\n");
EnterConfig();
/* config WDT registers */
w_reg(0x07,0x08);
/*  enable  keyboard  interrupt  to  reset  WDT  timeout
value */
w_reg(0xF2,r_reg(0xF2)|0x40);
/* set unit as second */
w_reg(0xF0,r_reg(0xF0)&~0x04);
/* start the Watchdog */
w_reg(0x30,0x01);
/* set timeout value as 30 seconds */
/* WDT start automatically while timeout value is set
*/
w_reg(0xF1,0x1E);


printf("-----------------------------------------------
-----\n");
printf("WDT     is     set     and     counting     down
now.<<<<<<<<<<<<<<<<<\n");
printf("-----------------------------------------------
-----\n");
for(count=30;count!=0;count--)
{ printf("Countdown %2d :  .\n",count);
/* reset WDT timeout value to 10 seconds */
/* w_reg(0x73,0x0A); */
sleep(1);
}
/* disable WDT */
```

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

```
/* WDT stop while timeout value is set to zero */
w_reg(0x30,0x00);
printf("WDT is disable. Program is terminating.");
ExitConfig();
return 0;
}
```

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Appendix D Digital Input/Output Function Library

DI/O provides input/output to support inter-device communications. Simple programming guides allow easy transmission of digital signals between the system and attached peripherals.

DI/O with API/Windows

Matrix DI/O API library files and a demo program (incl. source code) can be downloaded from http://www.adlinktech.com.

To use the DI/O function library for MVP-6000 series, include the header file awl.h and linkage library awl.lib in the C++ project. DI/O functions are as follows.

AwlDioGetValue

Reads the digital logic state of a digital input line.

Syntax

C/C++

```
int __stdcall AwlDioGetValue(int Index)
```

Parameter(s)

Index

Indexes the digital logic state of MVP-6000 digital input channels 1 to 8 (bit 0 to 7)

Return codes

```
0: Operation Success
-1: Operation Failed
```

AwlDioSetValue

Sets the digital logic state of the digital output line.

AwlDioGetValue

Reads the digital logic state of a digital input line.

Syntax

C/C++

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

```
int __stdcall AwlDioGetValue(int Index , int
     Value)
```

Parameter(s)

Index

Indexes the digital logic state of MVP-6000 digital input channels 1 to 8 (bit 0 to 7)

Value

Sets the digital logic state of MVP-6000 digital output channels 1 to 8 (bit 0 to 7) to 0 or 1.

Return codes

```
0: Operation Success
-1: Operation Failed
```

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Important Safety Instructions

For user safety, please read and follow all instructions, Warnings, Cautions, and Notes marked in this manual and on the associated device before handling/operating the device, to avoid injury or damage.

S'il vous plaît prêter attention stricte à tous les avertissements et mises en garde figurant sur l'appareil , pour éviter des blessures ou des dommages.

- Read these safety instructions carefully
- Keep the User's Manual for future reference
- Read the Specifications section of this manual for detailed information on the recommended operating environment
- The device can be operated at an ambient temperature of 50ºC
- When installing/mounting or uninstalling/removing device; or when removal of a chassis cover is required for user servicing (See "Getting Started" on page 21.):
  - Turn off power and unplug any power cords/cables
  - Reinstall all chassis covers before restoring power
- To avoid electrical shock and/or damage to device:
  - Keep device away from water or liquid sources
  - Keep device away from high heat or humidity
  - Keep device properly ventilated (do not block or cover ventilation openings)
  - Always use recommended voltage and power source settings
  - Always install and operate device near an easily accessible electrical outlet
  - Secure the power cord (do not place any object on/over the power cord)
  - Only install/attach and operate device on stable surfaces and/or recommended mountings
- If the device will not be used for long periods of time, turn off and unplug from its power source

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

- Never attempt to repair the device, which should only be serviced by qualified technical personnel using suitable tools
- A Lithium-type battery may be provided for uninterrupted backup or emergency power.



Risk of explosion if battery is replaced with one of an incorrect type; please dispose of used batteries appropriately.
Risque d'explosion si la pile est remplacée par une autre de type incorrect. Veuillez jeter les piles usagées de façon appropriée.

- The device must be serviced by authorized technicians when:
  - The power cord or plug is damaged
  - Liquid has entered the device interior
  - The device has been exposed to high humidity and/or moisture
  - The device is not functioning or does not function according to the User's Manual
  - The device has been dropped and/or damaged and/or shows obvious signs of breakage
- Disconnect the power supply cord before loosening the thumbscrews and always fasten the thumbscrews with a screwdriver before starting the system up
- It is recommended that the device be installed only in a server room or computer room where access is:
  - Restricted to qualified service personnel or users familiar with restrictions applied to the location, reasons therefor, and any precautions required
  - Only afforded by the use of a tool or lock and key, or other means of security, and controlled by the authority responsible for the location

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

	**BURN HAZARD** Touching this surface could result in bodily injury. To reduce risk, allow the surface to cool before touching. ***RISQUE DE BRÛLURES*** *Ne touchez pas cette surface, cela pourrait entraîner des blessures.* *Pour éviter tout danger, laissez la surface refroidir avant de la toucher.*

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

This page intentionally left blank.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Getting Service

Ask an Expert: http://askanexpert.adlinktech.com

ADLINK Technology, Inc.
9F, No.166 Jian Yi Road, Zhonghe District
New Taipei City 235, Taiwan
Tel: +886-2-8226-5877
Fax: +886-2-8226-5717
Email: service@adlinktech.com

Ampro ADLINK Technology, Inc.
5215 Hellyer Avenue, #110
San Jose, CA 95138, USA
Tel: +1-408-360-0200
Toll Free: +1-800-966-5200 (USA only)
Fax: +1-408-360-0222
Email: info@adlinktech.com

ADLINK Technology (China) Co., Ltd.
300 Fang Chun Rd., Zhangjiang Hi-Tech Park
Pudong New Area, Shanghai, 201203 China
Tel: +86-21-5132-8988
Fax: +86-21-5132-3588
Email: market@adlinktech.com

ADLINK Technology GmbH
Hans-Thoma-Straße 11
D-68163 Mannheim, Germany
Tel: +49-621-43214-0
Fax: +49-621 43214-30
Email: emea@adlinktech.com

Please visit the Contact page at **www.adlinktech.com** for information on how to contact the ADLINK regional office nearest you:

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000