
PCIe-U300 Series

4/8/12-ch PCI Express® x4 Gen2
USB3 Vision Top Performing Frame Grabbers

User's Manual

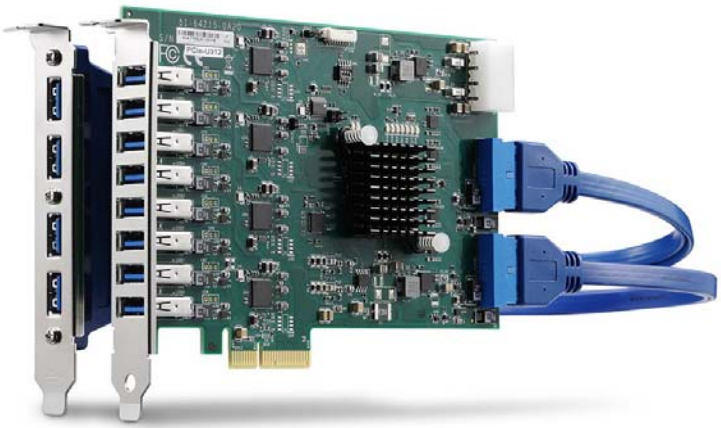

Manual Rev.:	1.2
Revision Date:	January 24, 2022
Part No:	50M-00064-1020

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000
Leading EDGE COMPUTING

Revision History

Revision	Release Date	Description of Change(s)
1.00	2019-10-22	Initial release
1.1	2020-12-11	Add PCIe-U312 version; rename to PCIe-U300 Series; update PCIe-U304/U308 to "A2" PCB revision (refer to user's manual Rev. 1.00 for "A1" PCB revision info)
1.2	2022-01-24	Correct PCIe Gen2 specification

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Preface


Copyright © 2019, 2020, 2022 ADLINK Technology Inc.

This document contains proprietary information protected by copyright. All rights are reserved. No part of this manual may be reproduced by any mechanical, electronic, or other means in any form without prior written permission of the manufacturer.

Disclaimer

The information in this document is subject to change without prior notice in order to improve reliability, design, and function and does not represent a commitment on the part of the manufacturer.

In no event will the manufacturer be liable for direct, indirect, special, incidental, or consequential damages arising out of the use or inability to use the product or documentation, even if advised of the possibility of such damages.



ADLINK is committed to fulfill its social responsibility to global environmental preservation through compliance with the European Union's Restriction of Hazardous Substances (RoHS) directive and Waste Electrical and Electronic Equipment (WEEE) directive. Environmental protection is a top priority for ADLINK. We have enforced measures to ensure that our products, manufacturing processes, components, and raw materials have as little impact on the environment as possible. When products are at their end of life, our customers are encouraged to dispose of them in accordance with the product disposal and/or recovery programs prescribed by their nation or company.

Battery Labels (for products with battery)



LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

California Proposition 65 Warning

WARNING: This product can expose you to chemicals including acrylamide, arsenic, benzene, cadmium, Tris(1,3-dichloro-2-propyl)phosphate (TDCPP), 1,4-Dioxane, formaldehyde, lead, DEHP, styrene, DINP, BBP, PVC, and vinyl materials, which are known to the State of California to cause cancer, and acrylamide, benzene, cadmium, lead, mercury, phthalates, toluene, DEHP, DIDP, DnHP, DBP, BBP, PVC, and vinyl materials, which are known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**.**

Trademarks

Product names mentioned herein are used for identification purposes only and may be trademarks and/or registered trademarks of their respective companies.

Conventions

Take note of the following conventions used throughout this manual to make sure that users perform certain tasks and instructions properly.

NOTE: Additional information, aids, and tips that help users perform tasks.

CAUTION: Information to prevent ***minor*** physical injury, component damage, data loss, and/or program corruption when trying to complete a task.

WARNING: Information to prevent ***serious*** physical injury, component damage, data loss, and/or program corruption when trying to complete a specific task.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Table of Contents

Revision History ii

Preface iii

List of Figures vii

List of Tables ix

1 Introduction 1

1.1 Overview 1
1.2 Features 2
1.3 Applications 3
1.4 Specifications 4
1.5 USB Power 6
1.5.1 Overcurrent Protection 6
1.5.2 Software-programmable USB Power On/Off 6
1.6 PCB Layout and Dimensions 7
1.6.1 PCIe-U304 Layout 7
1.6.2 PCIe-U308 Layout 9
1.6.3 PCIe-U312 Layout 11

2 Board Interfaces 13

2.1 PCIe-U304 Interface Layout 13
2.2 PCIe-U308 Interface Layout 15
2.3 PCIe-U312 Interface Layout 17
2.4 Connector, Jumper and LED Definitions 19
2.4.1 USB Ports 19
2.4.2 4-pin 12V Power Connector (CN10) 19
2.4.3 Card ID Switch (SW1) 20
2.4.4 Status LEDs 21

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

3 Getting Started 23
3.1 Unpacking Checklist 23
3.2 Installation 23

Important Safety Instructions 25

Getting Service 27

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

List of Figures

Figure 1-1: PCIe-U304 Top View Dimensions 7
Figure 1-2: PCIe-U304 Side View 7
Figure 1-3: PCIe-U304 Bottom View 8
Figure 1-4: PCIe-U304 Front and Rear View 8
Figure 1-5: PCIe-U308 Top View Dimensions 9
Figure 1-6: PCIe-U308 Side View 9
Figure 1-7: PCIe-U308 Bottom View 10
Figure 1-8: PCIe-U308 Front and Rear View 10
Figure 1-9: PCIe-U312 Top View Dimensions 11
Figure 1-10: PCIe-U312 Side View 11
Figure 1-11: PCIe-U312 Bottom View 12
Figure 1-12: PCIe-U312 Front and Rear View 12
Figure 2-1: PCIe-U304 Connector, Jumper and LED Locations 13
Figure 2-2: PCIe-U304 USB Port Assignment 14
Figure 2-3: PCIe-U308 Connector, Jumper and LED Locations 15
Figure 2-4: PCIe-U308 USB Port Assignment 16
Figure 2-5: PCIe-U312 Connector, Jumper and LED Locations 17
Figure 2-6: PCIe-U312 USB Port Assignment 18
Figure 2-7: 4-pin 12V Power Connector 19
Figure 2-8: Card ID Switch 20
Figure 2-9: PCIe-U300 Series Status LEDs 21

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

This page intentionally left blank.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

List of Tables

Table 1-1: PCIe-U300 Series Specifications..... 4
Table 2-1: PCIe-U304 Connector, Jumper and LED Legend 13
Table 2-2: PCIe-U308 Connector, Jumper and LED Legend 15
Table 2-3: PCIe-U312 Connector, Jumper and LED Legend 17
Table 2-4: USB 3.0 Type-A Port Pin Assignment 19
Table 2-5: 4-pin 12V Power Connector Pin Assignment..... 19
Table 2-6: Card ID Switch Settings..... 20
Table 2-7: Card ID Switch Legend..... 20
Table 2-8: PCIe-U300 Series Status LED Legend..... 21

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

This page intentionally left blank.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1 Introduction

1.1 Overview

ADLINK's PCIe-U300 Series is a PCI Express® x4 lane Gen2 USB3 Vision frame grabber supporting 4, 8 or 12 Type-A USB 3.1 Gen 1 ports (the same as USB 3.0) for multiple USB3 Vision® device connections with data transfer speeds up to 5 Gb/s per port.

- PCIe-U304 - 4 USB ports (dedicated bandwidth)
- PCIe-U308 - 8 USB ports (shared bandwidth)
- PCIe-U312 - 12 USB ports (shared bandwidth)

The PCIe-U300 Series delivers 5V and up to 1500mA per port for external USB3 Vision® industrial cameras. To ensure industrial-grade high-bandwidth performance for each port, the card uses four independent Fresco FL1100 USB 3.1 Gen 1 Host Controllers with a 4 lane PCI Express Gen2 interface enabling every USB port to deliver up to 5 Gbps bandwidth when operating multiple ports simultaneously. It supports software programmable per-port power on/off control for fault recovery operations.

ADLINK's PCIe-U300 Series conveniently interfaces with USB3 Vision devices for machine vision, factory automation, and quality assurance applications.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1.2 Features

- PCI Express x4 Gen2 interface
- 4 Independent Fresco FL1100 USB 3.1 Gen 1 Host Controllers
- Data Transfer Rates: SuperSpeed (5.0 Gbps), High Speed (480.0 Mbps), Full Speed (12.0 Mbps) and Low Speed (1.5 Mbps)
- 4/8/12 USB 3.0 Type-A connectors
- 5V, up to 1500mA per port
- Up to 20/60W power supply from PCIe bus / 4-pin Molex connector
- Multiple cards and cameras on a single system
- Voltage, current overload and short circuit protection
- Easy-to-use API provided for software-programmable per-port power on/off
- Host OS Support: Windows® 7/10, Linux

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1.3 Applications

The PCIe-U300 Series is ideally suited for frame grabbing in a wide variety of applications including:

- Machine Vision Inspection systems
- Factory Automation
- Quality Assurance



The PCIe-U300 Series Function Library Reference and driver can be downloaded from http://www.adlinktech.com

- AVS-SDK driver for USB power management
- FLUSB3.0-x.x driver for USB3 controller



For the development host PC, make certain to install Microsoft's Kernel-Mode Driver Framework v1.11. This is not natively supported on Windows 7 unless the KB3033929 hotfix is installed manually or via Windows Update.



If the total USB load exceeds 20W, a 4-pin Molex Power Connector connection is required to avoid system damage. See “4-pin 12V Power Connector (CN10)” on page 19.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1.4 Specifications

		PCIe-U304	PCIe-U308	PCIe-U312
PCI Express				
PCI Express		4-lane PCI Express Gen 2.1 (5 GT/s)		
Differential Output Peak to Peak Voltage		+0.8 V to +1.2 V		
Differential Input Peak to Peak Voltage		+0.175 V to +1.2 V		
Input voltage for PERST#, WAKE#, SMBus		-0.75 V to +4.05 V		
USB Ports				
USB Ports (on bracket)		4	8	12 (4 via extension)
USB Connector		USB Type-A Connector		
USB Host Controller		4 x Fresco FL1100 Host Controllers		
		Compliant with USB 3.0 Specification and Intel® xHCI Specification, Revision 1.0		
Data Transfer Rates		SuperSpeed (5.0 Gbps), High Speed (480.0 Mbps), Full Speed (12.0 Mbps), Low Speed (1.5 Mbps)		
USB Power				
Output Voltage (at PSE)		5V ±5%		5V at 4-pin connectors on cable, less 0.25V
Current Limit Range (per Port)		1700 mA ±7%		Ports 1-8: 1700 mA ±7% Ports 9-12: 1100 mA ±7%
USB Power Management		Software-programmable per-port power on/off		
		Voltage, current overload and short circuit protection		
PCBA Max. Power Req't w/o USB Power Delivery		+3.3V 2A, +12V @ 0.1A		
USB Power Delivery Capacity (at PSE)	PCIe Slot only w/o 4-pin Molex Connector	Max. 20W USB Power		4-pin Molex connector req'd for extension ports
	PCIe Slot w/ 4-pin Molex Connector	Max. 30W USB Power	Max. 60W USB Power	Max. 78W USB Power

Table 1-1: PCIe-U300 Series Specifications

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

	PCIe-U304	PCIe-U308	PCIe-U312
Physical			
Dimensions (W x L)	167.65 mm x 111.15 mm (6.59" x 4.37")		
Operating Temperature	0°C to 60°C (32° to 140°F)		
Humidity	5% to 90% RHNC		
Storage Temperature	-40°C to 85°C (-40°F to 185°F)		
Safety Compliance	CE/FCC, Class A		

Table 1-1: PCIe-U300 Series Specifications

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1.5 USB Power

The PCIe-U300 Series provides a choice of 4, 8 or 12 USB 3.0 ports supporting Type-A USB3.0 connections on the front panel, with 5V at 1500mA per port and extension port with 5V at 900mA per port. It supports software programmable per-port power on/off control for fault recovery operations.

1.5.1 Overcurrent Protection

If the USB connection exceeds a rated ICUT value due to overload, short circuit, or ground fault, the system protects the circuit by shutting down the connection to PD in order to avoid an excessive or dangerous temperature rise in the conductors. The recommend recovery procedure is to reboot the PC.

- Ports 1-8
  - USB port ICUT: 1700 mA ±7%
- Ports 9-12
  - USB port ICUT: 1100 mA ± 7%

1.5.2 Software-programmable USB Power On/Off

The AVS SDK for USB power management is ready to use with the PCIe-U300 Series with no additional licensing required. Applications are easily created with the SDK, requiring only a few lines of code.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1.6 PCB Layout and Dimensions

NOTE: All dimensions areshown in mm.

1.6.1 PCIe-U304 Layout

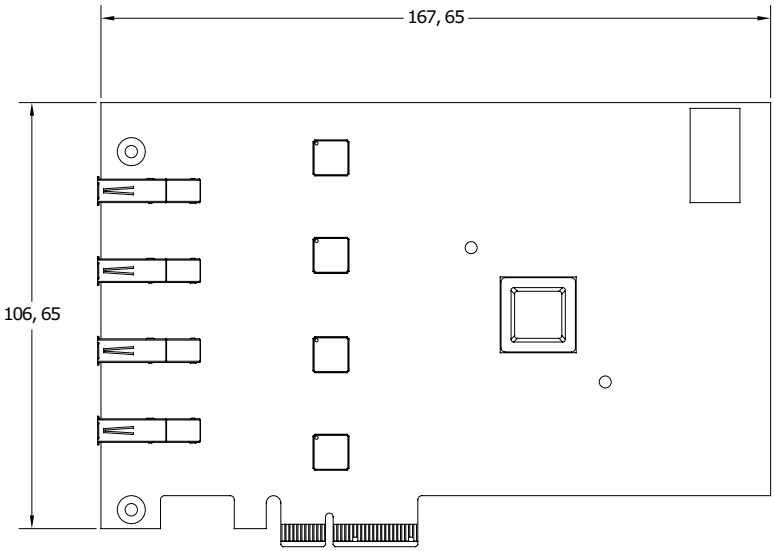


Figure 1-1: PCIe-U304 Top View Dimensions



Figure 1-2: PCIe-U304 Side View

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

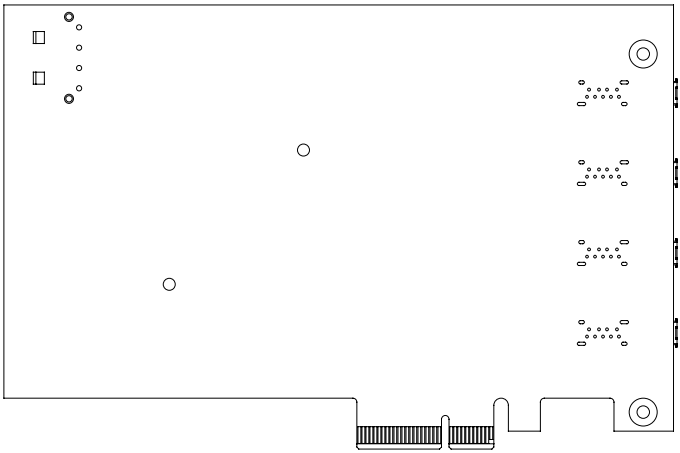


Figure 1-3: PCIe-U304 Bottom View

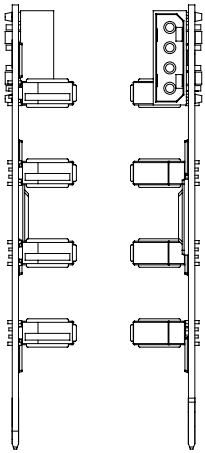


Figure 1-4: PCIe-U304 Front and Rear View

1.6.2 PCIe-U308 Layout

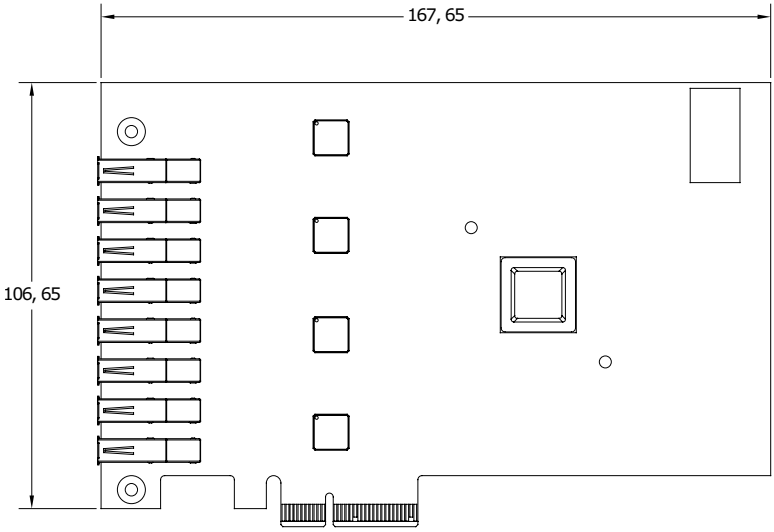


Figure 1-5: PCIe-U308 Top View Dimensions



Figure 1-6: PCIe-U308 Side View

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

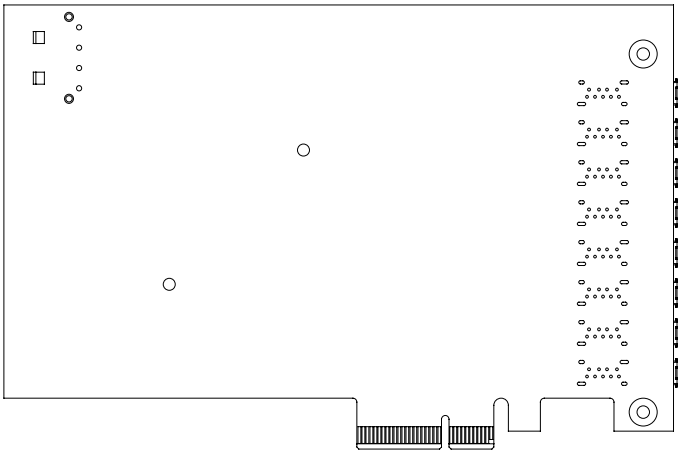


Figure 1-7: PCIe-U308 Bottom View

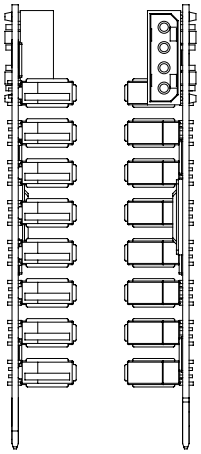


Figure 1-8: PCIe-U308 Front and Rear View

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1.6.3 PCIe-U312 Layout

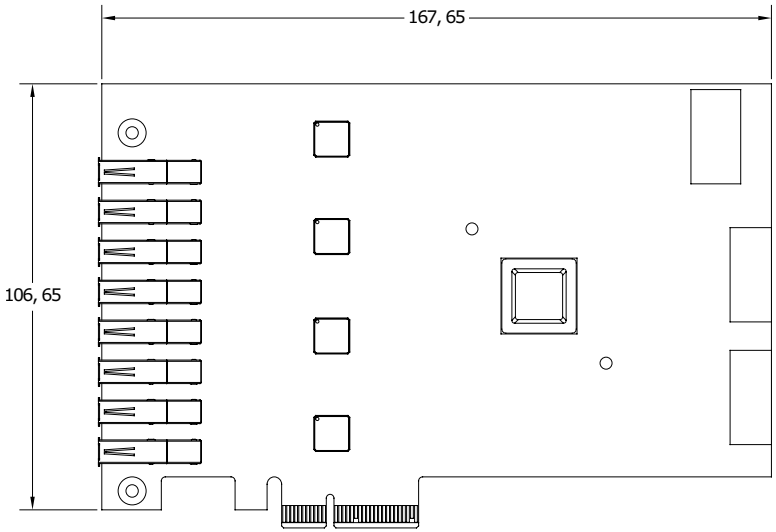


Figure 1-9: PCIe-U312 Top View Dimensions




Figure 1-10: PCIe-U312 Side View

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

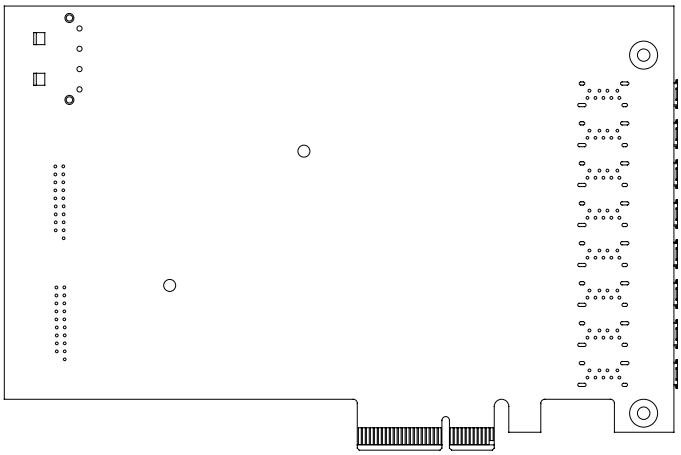


Figure 1-11: PCIe-U312 Bottom View

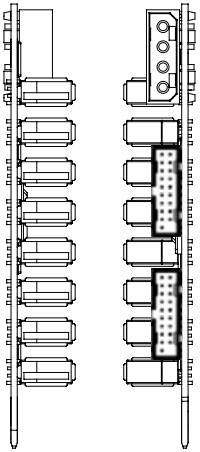


Figure 1-12: PCIe-U312 Front and Rear View

2 Board Interfaces

2.1 PCIe-U304 Interface Layout

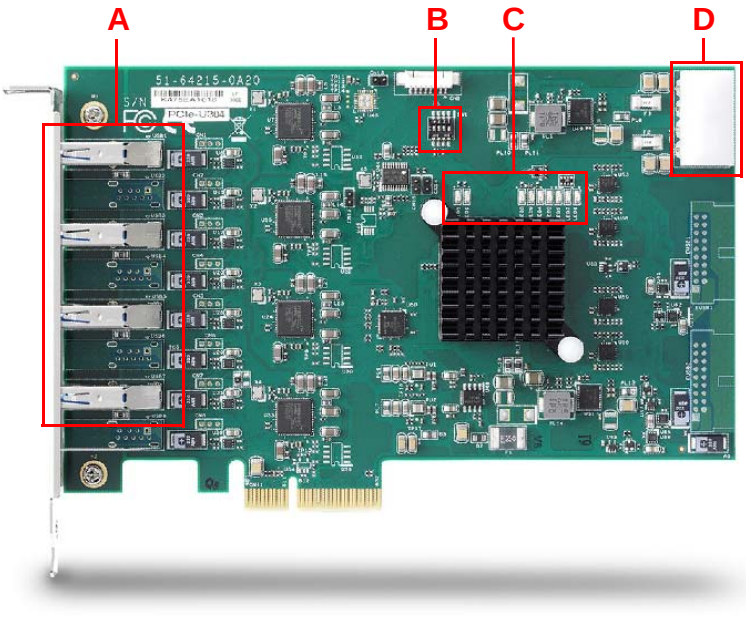


Figure 2-1: PCIe-U304 Connector, Jumper and LED Locations

A	USB Type-A connectors
B	Card ID Switch (SW1)
C	LED Status Indicators
D	4-pin 12V Connector

Table 2-1: PCIe-U304 Connector, Jumper and LED Legend

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

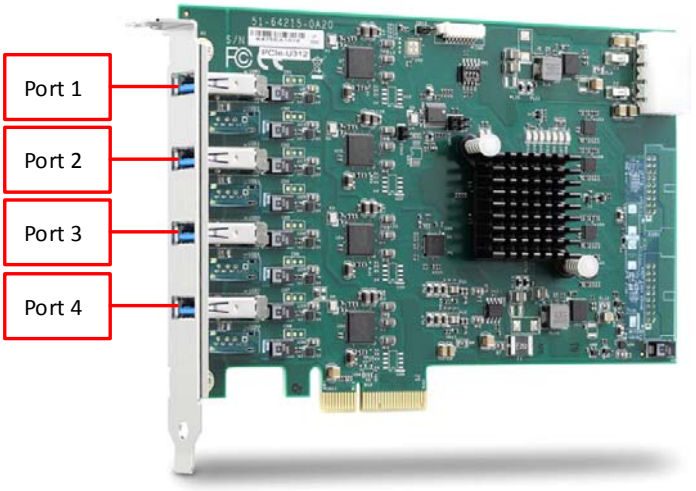


Figure 2-2: PCIe-U304 USB Port Assignment

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2.2 PCIe-U308 Interface Layout

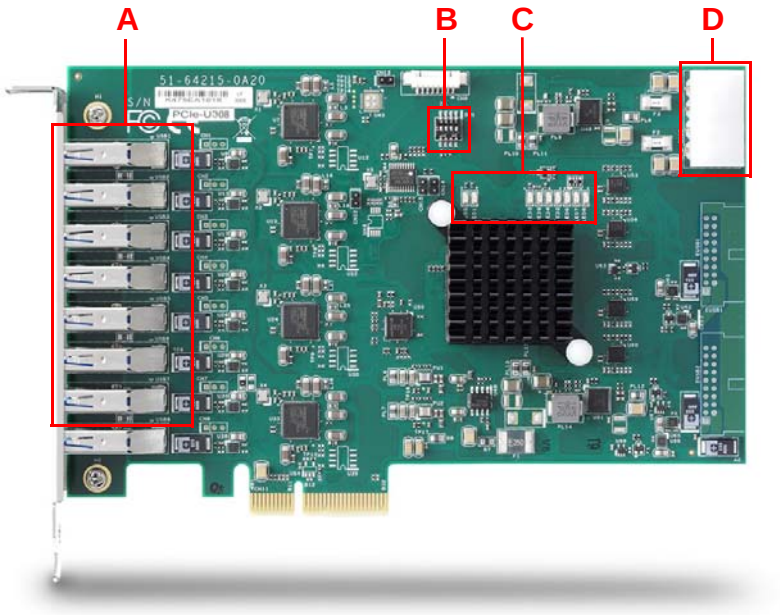


Figure 2-3: PCIe-U308 Connector, Jumper and LED Locations

A	USB Type-A connectors
B	Card ID Switch (SW1)
C	Status LEDs
D	4-pin 12V Connector

Table 2-2: PCIe-U308 Connector, Jumper and LED Legend

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

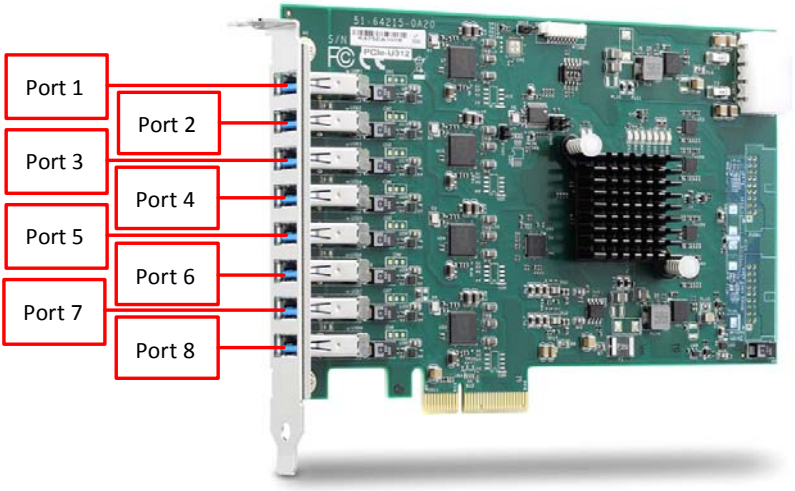


Figure 2-4: PCIe-U308 USB Port Assignment

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2.3 PCIe-U312 Interface Layout

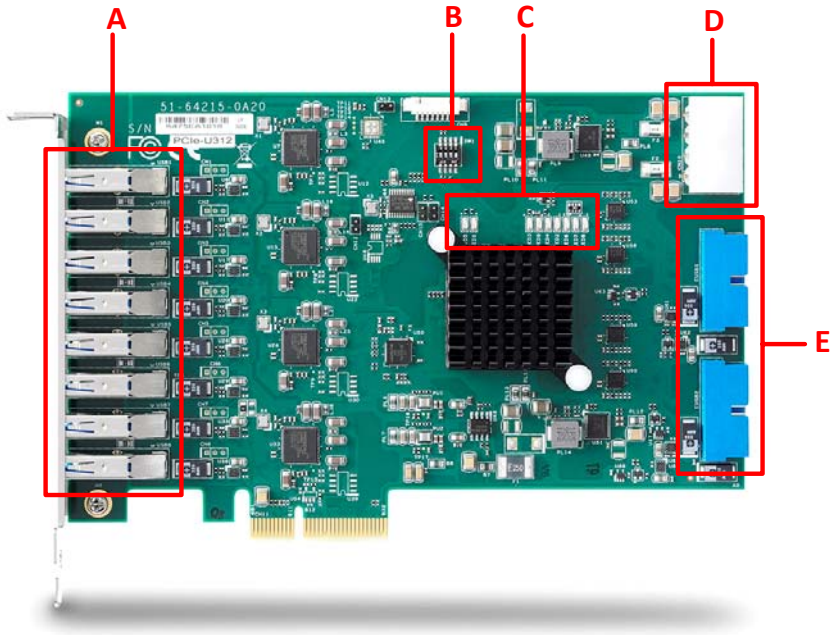


Figure 2-5: PCIe-U312 Connector, Jumper and LED Locations

A	USB Type-A connectors
B	Card ID Switch (SW1)
C	Status LEDs
D	4-pin 12V connector
E	Internal 20-pin header for USB 3.0 Ports 9-12 Extension

Table 2-3: PCIe-U312 Connector, Jumper and LED Legend

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


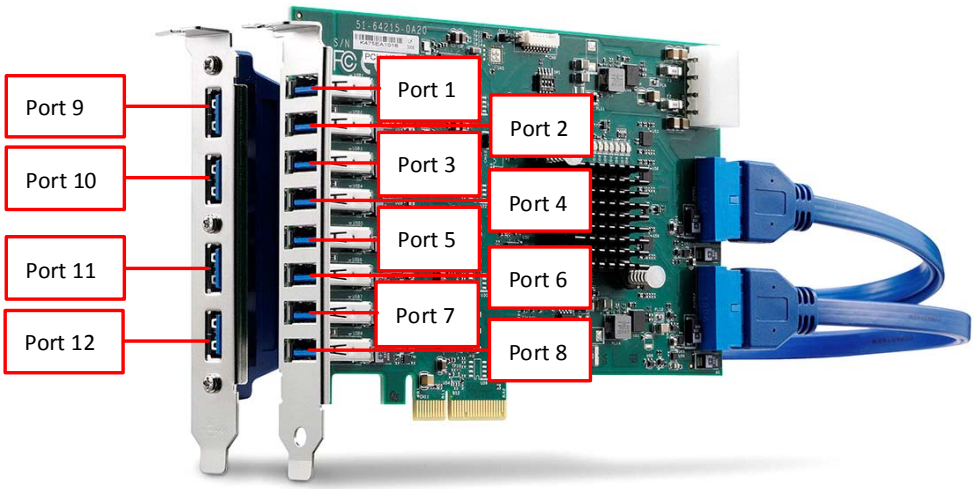


Figure 2-6: PCIe-U312 USB Port Assignment

2.4 Connector, Jumper and LED Definitions

2.4.1 USB Ports



Pin	Signal	Pin	Signal
1	VBUS	5	SSRX-
2	D-	6	SSRX+
3	D+	7	GND_DRAIN
4	GND	8	SSTX-
		9	SSTX+

Table 2-4: USB 3.0 Type-A Port Pin Assignment

2.4.2 4-pin 12V Power Connector (CN10)




Figure 2-7: 4-pin 12V Power Connector

Pin	Signal
1	+12V
2	GND
3	GND
4	+5

Table 2-5: 4-pin 12V Power Connector Pin Assignment

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2.4.3 Card ID Switch (SW1)



Figure 2-8: Card ID Switch

Setting	Definition
ON	1 (Default)
OFF	0

Table 2-6: Card ID Switch Settings

The Card ID default setting is at 15 (0x1111).

Card ID	1	2	3	4
0	OFF	OFF	OFF	OFF
1	ON	OFF	OFF	OFF
2	OFF	ON	OFF	OFF
3	ON	ON	OFF	OFF
4	OFF	OFF	ON	OFF
5	ON	OFF	ON	OFF
6	OFF	ON	ON	OFF
7	ON	ON	ON	OFF
8	OFF	OFF	OFF	ON
9	ON	OFF	OFF	ON
10	OFF	ON	OFF	ON
11	ON	ON	OFF	ON
12	OFF	OFF	ON	ON
13	ON	OFF	ON	ON
14	OFF	ON	ON	ON
15	ON	ON	ON	ON

Table 2-7: Card ID Switch Legend

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2.4.4 Status LEDs

The status LEDs on the top side of the PCIe-U300 indicate the status of the data stream for each PCIe bridge port and USB controller.



Figure 2-9: PCIe-U300 Series Status LEDs

LED	Activity	Status
1/3/4/5	Off	Abnormal: PCIe switch upstream function (to USB 3.0 controller) is disabled
	On (default)	Normal
2/6/7/8	Off	Abnormal: PCIe switch upstream function (to PCIe slot) is disabled
	On (default)	PCIe x4 Gen2
	Blinking	Insufficient bandwidth
9	Off (default)	Normal
	On	Abnormal: PCIe switch has experienced an unexpected error

Table 2-8: PCIe-U300 Series Status LED Legend

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

This page intentionally left blank.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

3 Getting Started

3.1 Unpacking Checklist

Before unpacking, check the shipping carton for any damage. If the shipping carton and/or contents are damaged, inform your dealer immediately. Retain the shipping carton and packing materials for inspection. Obtain authorization from your dealer before returning any product to ADLINK. Ensure that the following items are included in the package.

- PCIe-U300 Series Frame Grabber card



OEM versions with non-standard configuration, functionality, or packaging may vary according to individual requirements.

3.2 Installation

The following describes installation of the PCIe-U300 Series card on a PCI Express bus.

1. Remove the computer cover according to the computer manual.



A vacant PCI Express slot is required for installation of the card; if none is available, remove a PCI Express card and note the slot number.

2. Remove the slot cover (if any).
3. Carefully position the card in the selected PCI Express slot. If installing in a desktop computer, align the card with the PCI Express slot.
4. Press the card firmly but carefully into the connector.
5. Secure the card with the screw.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

6. *PCIe-U312 only:* Connect the cables of the USB extension bracket to the connectors on the rear of the card as shown below, and secure the USB extension bracket to an available slot with a screw.



7. Connect devices to the card using the USB connectors.
8. Power up the computer.

NOTE:

PCIe-U300 Series cards can be installed in a PCI Express x4, x8, or x16 slot. Please download the driver from ADLINK (www.adlinktech.com)

NOTE:

PCIe-U300 Series cards may not fit some consumer PC cases with non-standard PCIe slots. It is not recommended to install PCIe-U300 Series cards into a PC with a PCIe slot width less than 13.25mm (0.512").

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Important Safety Instructions

For user safety, please read and follow all instructions, Warnings, Cautions, and Notes marked in this manual and on the associated device before handling/operating the device, to avoid injury or damage.

S'il vous plaît prêter attention stricte à tous les avertissements et mises en garde figurant sur l'appareil , pour éviter des blessures ou des dommages.

- Read these safety instructions carefully.
- Keep the User's Manual for future reference.
- Read the Specifications section of this manual for detailed information on the recommended operating environment.
- The device can be operated at an ambient temperature of 60ºC.
- When installing/mounting or uninstalling/removing device, or when removal of a chassis cover is required for user servicing (See "Getting Started" on page 23.):
  - Turn off power and unplug any power cords/cables.
  - Reinstall all chassis covers before restoring power.
- To avoid electrical shock and/or damage to device:
  - Keep device away from water or liquid sources.
  - Keep device away from high heat or humidity.
  - Keep device properly ventilated (do not block or cover ventilation openings).
  - Always use recommended voltage and power source settings.
  - Always install and operate device near an easily accessible electrical outlet.
  - Secure the power cord (do not place any object on/over the power cord).
  - Only install/attach and operate device on stable surfaces and/or recommended mountings.
- If the device will not be used for long periods of time, turn off and unplug it from its power source
- Never attempt to repair the device, which should only be serviced by qualified technical personnel using suitable tools

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

- A Lithium-type battery may be provided for uninterrupted backup or emergency power.



Risk of explosion if battery is replaced with one of an incorrect type; please dispose of used batteries appropriately.
Risque d'explosion si la pile est remplacée par une autre de type incorrect. Veuillez jeter les piles usagées de façon appropriée.

- The device must be serviced by authorized technicians when:
  - The power cord or plug is damaged.
  - Liquid has entered the device interior.
  - The device has been exposed to high humidity and/or moisture.
  - The device is not functioning or does not function according to the User's Manual.
  - The device has been dropped and/or damaged and/or shows obvious signs of breakage.
- Disconnect the power supply cord before loosening the thumbscrews and always fasten the thumbscrews with a screwdriver before starting the system up.
- It is recommended that the device be installed only in a server room or computer room where access is:
  - Restricted to qualified service personnel or users familiar with restrictions applied to the location, reasons therefor, and any precautions required.
  - Only afforded by the use of a tool or lock and key, or other means of security, and controlled by the authority responsible for the location.

	**BURN HAZARD** Touching this surface could result in bodily injury. To reduce risk, allow the surface to cool before touching. ***RISQUE DE BRÛLURES*** *Ne touchez pas cette surface, cela pourrait entraîner des blessures.* *Pour éviter tout danger, laissez la surface refroidir avant de la toucher.*

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Getting Service

Ask an Expert: http://askanexpert.adlinktech.com

ADLINK Technology, Inc.
No. 66, Huaya 1st Road, Guishan District
Taoyuan City 333, Taiwan
Tel: +886-3-216-5088
Fax: +886-3-328-5723
Email: service@adlinktech.com

Ampro ADLINK Technology, Inc.
6450 Via Del Oro
San Jose, CA 95119-1208, USA
Tel: +1-408-360-0200
Toll Free: +1-800-966-5200 (USA only)
Fax: +1-408-600-1189
Email: info@adlinktech.com

ADLINK Technology (China) Co., Ltd.
300 Fang Chun Rd., Zhangjiang Hi-Tech Park
Pudong New Area, Shanghai, 201203 China
Tel: +86-21-5132-8988
Fax: +86-21-5132-3588
Email: market@adlinktech.com

ADLINK Technology GmbH
Hans-Thoma-Straße 11
D-68163 Mannheim, Germany
Tel: +49-621-43214-0
Fax: +49-621 43214-30
Email: emea@adlinktech.com

Please visit the Contact page at www.adlinktech.com for information on how to contact the ADLINK regional office nearest you:

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000