# RK-606C

## 6-slot Wallmount Chassis for Full-size SBC



## Specifications

| | |
|---|---|
| Dimensions | 10 x 6.9 x 16.1-inch(254 x 175 x 410mm ) (W x H x D) |
| Drive Bays | One 5.25" and one 3.5" front accessible drive bay |
| | One internal 3.5" drive bay |
| Construction | Heavy-Duty Steel |
| Color Options | Beige: standard |
| | Others: call for availability |
| Cooling Fans | One 8cm in-take Fan |
| Front Panel | LEDs: HDD active and system power |
| | System reset switch, AT Power switch, optional ATX power on/off switch |
| | PS2 keyboard connector |
| Rear Panel Option | Supports 6-slot passive backplane |
| | Supports PS2 form factor AT or ATX power supply unit |
| Carton Size | 14.8 x 11.4 x 20.9-inch (375 x 290 x 530mm ) |
| Weight | 6kg/13.2lbs |

## Features

- *Supports 6-slot ISA or ISA/PCI backplane*
- *Equipped with one 5.25" and one 3.5" front mounted drive bay*
- *Flexible hold down bar for cards*
- *Replaceable and easy to clean filter*

### Backplane Options

| Model Name | PICMG CPU | PCI | ISA | PSU Connector |
|---|---|---|---|---|
| HPCI-6S4 | 1 | 4 | 1 | ATX/AT |

## Ordering Information

| Model Name | Color | Backplane | Power supply |
|---|---|---|---|
| NS-606CW-6S4-25 | Beige | HPCI-6S4 | APS-925XA-ST |
| NS-606CW-6S4-30 | Beige | HPCI-6S4 | APS-930XA-ST |


### Power Supply Options

| Model Number | Watt | Input Range | Output (Max.) | | | | | | Current Type |
|---|---|---|---|---|---|---|---|---|---|
| | | | +5V | +3.3V | +12V | -12V | -5V | +5Vsb | |
| APS-925XA-ST | 250W | 100-240VAC | 25A | 25A | 13A | 0.8A | 0.3A | 2A | ATX12 |
| APS-930XA-ST | 300W | 90-264VAC | 40A | 30A | 15A | 1A | 0.5A | 2A | ATX12 |
| APS-940XA-ATX12 | 400W | 90-240VAC | 35A | 25A | 30A | 1A | 0.8A | 2A | ATX12 |

Note: Contact us for more options such as DC input power supply.

## Dimensions

**Unit: mm**

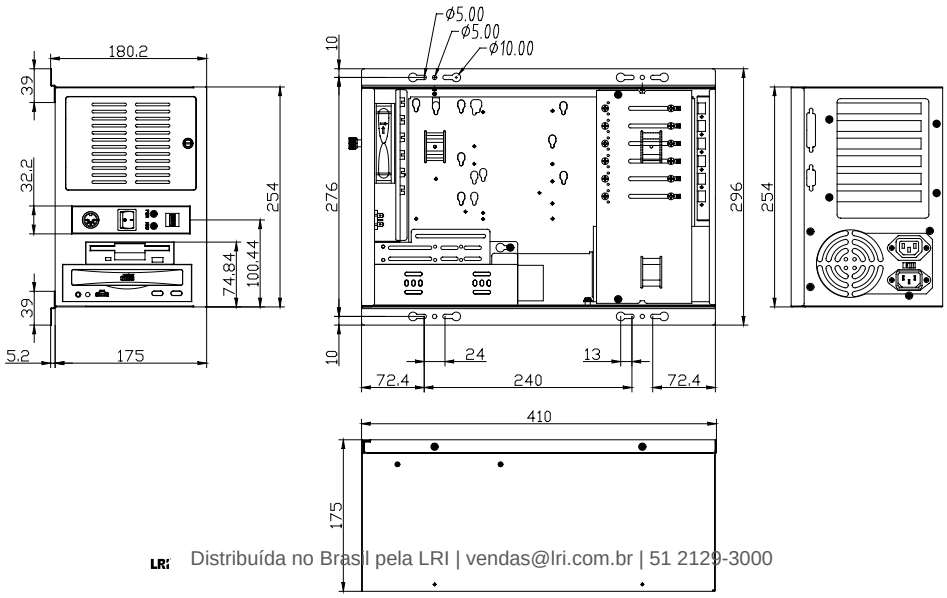


Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000



*All specifications are subject to change without further notice.*