RK-615FB

4U Rackmount Industrial Chassis supports 15-slot Backplane



Features

- Three 5.25-inch shock-resistant drive bays
- Easy-to-remove top cover
- Adjustable hold down bar for cards
- Supports AT or ATX power supply units
- Removable air filter
- Two front accessible USB connectors

Specifications

Dimensions	19 in x 7 in x 20.1 in (480 mm x 177 mm x 510 mm) (W x H x D)
Drive Bays	Three 5.25" front accessible drive bays
	Two optional racks for one 3.5" internal drive
Construction	Heavy-duty steel
Color	Beige
Cooling Fans	One 12 cm ball bearing fan with 108 CFM, optional second fan
Front Panel	Front door with lock
	Two front accessible USB connectors
	LEDs: HDD active and system power
	System reset switch
	Power switch button
Backplane	14/15-slot passive backplane
Power Supply	PS2 form factor AT or ATX power supply unit
Carton Size	27.2 in x 23.6 in x 13.6 in (691 mm x 605 mm x 345 mm)
Weight	Net 19 kg (41.8 lb)

Power Supply Options

Model Number	Watt	Input Range	Output (Max.)						
			+5 V	+3.3 V	+12 V1	+12 V2	-12 V	-5 V	+5 Vsb
APS930XA-ATX12	300 W	Unversal	16 A	19 A	17 A	17 A	0.5 A	0.3 A	3 A
APS-946XA-EPS12	460 W	Unversal	20 A	24 A	16 A	16 A	0.5 A	0.3 A	3 A

Ordering Information


Model Number	Color	Description
RK-615FB	Beige	4U rackmount industrial chassis supports 15-slot backplane

Backplane Options

Model Name	PICMG® SBC	PCIe x1	PCIe x4	PCIe x16	PCI	ISA	PSU Connector
EBP-10E5	1	4	--	1	4	--	ATX
EBP-13E2	1	--	1	1	10	--	ATX
EBP-13E4	1	--	3	1	7	--	ATX
HPCI-15S10	2	--	--	--	10	3	ATX/AT
HPCI-13S4LU	3	--	--	--	4	7	ATX/AT
HPCI-14S7U	3	--	--	--	7	5	ATX/AT
HPCI-14S12U	2	--	--	--	12	1	ATX/AT
HPCI-14S/ATX	2	--	--	--	4	8	ATX/AT

Dimensions

Units: mm

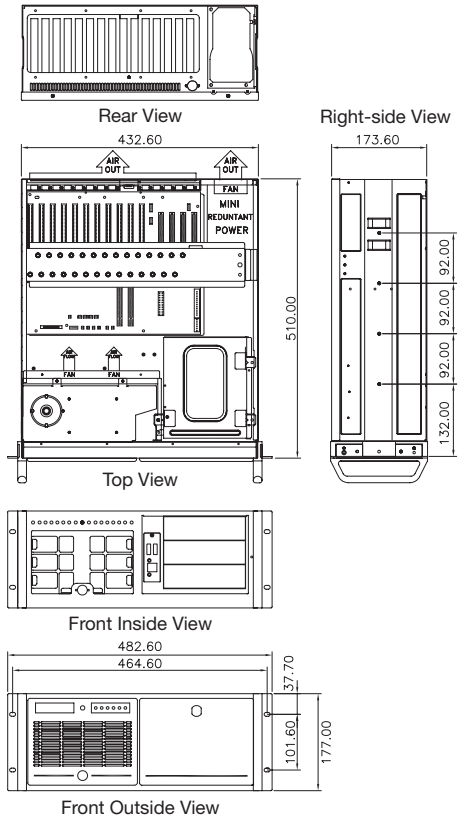

Mechanical Layout



LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

*Updated January 24, 2014. ©2014 ADLINK Technology, Inc. All Rights Reserved. All specifications are subject to change without further notice.