# Titan2

## IP69K Stainless Steel Rugged Monitor



AUO Display+

## Features

- Full IP69K protection against dust, water, and high-pressure washdown
- Sunlight-readable display with up to 1,000 nits brightness
- Optical bonding for enhanced visibility, reduced reflection, and improved vibration resistance.
- Ultra-slim 44 mm design with true-flat cover glass
- SUS304 stainless steel housing for superior corrosion resistance (SUS316 optional)
- Fanless, fully sealed design for reliable operation in harsh environments
- Industrial-grade waterproof M12 connectors
- 10-point PCAP touchscreen

## Ordering Information

**Titan2 21.5” Monitor**

21.5" FHD, PCAP, IP69K, stainless steel, Industrial monitor

## Optional Accessories

| External Cables | |
|---|---|
| 30-01682-0000-A0 | M12 A-code 4P to USB 2.0 \| Titan2 External USB 2.0 cable |
| 30-01684-0000-A0 | VGA to M12 A-code 12P VGA External cable |
| 30-01686-0000-A0 | HDMI A type 19P Male Waterproof to standard Molded cable Titan2 External HDMI cable |
| 31-62198-0000-A0 | 150W, IT Adapter, 24V/6.25A, M12 T-Code |

## Specifications




| Model Name | Titan2 Rugged Monitor |
|---|---|
| **Display** | |
| Size | 21.5-inch |
| Resolution | 1920 x 1080 |
| Aspect Ratio | 16:9 |
| Color | 16.7M |
| Brightness | 1,000 nits |
| Backlight Life (Hours) | 50,000 |
| Viewing Angle (U/D/R/L) | 89/89/89/89 |
| Contrast Ratio | 1000:1 |
| Touch Screen | 10-point, PCAP, Anti-fingerprint coating |
| Bonding | Optical Bonding |
| **I/O** | |
| USB Port | 1x M12 USB 2.0 with waterproof cover for touch |
| Video | 1x HDMI with waterproof cover<br>1x M12 VGA with waterproof cover |
| Power Input | 1x M12 for DC power |
| Optional | 2x IP65 Speaker |
| **Environmental** | |
| Operating Temperature | -10˚C – 50˚C |
| Storage Temperature | -20˚C – 60˚C |
| Humidity | 95% @ 40°C (non-condensing) |
| Vibration | MIL-STD-810H, 514.8C-I, Category 4 for Operational<br>MIL-STD-810H, 514.8C-IV, Category 4 for Non-operating |
| Shock | Operating: 20G acceleration part to part, 11ms |
| IP Rating | IP69K |
| Certifications & Compliance | CE/FCC |
| **Mechanical** | |
| Gross Weight | 7kg |
| Packing Dimensions (H x W x D mm) | 329.19 x 521.4 x 44 |
| Mounting | VESA Mount (100x100 mm) & Yoke Mount, Pipe Mount (by request) |


## Mechanism Diagram

### Front View

Unit: mm

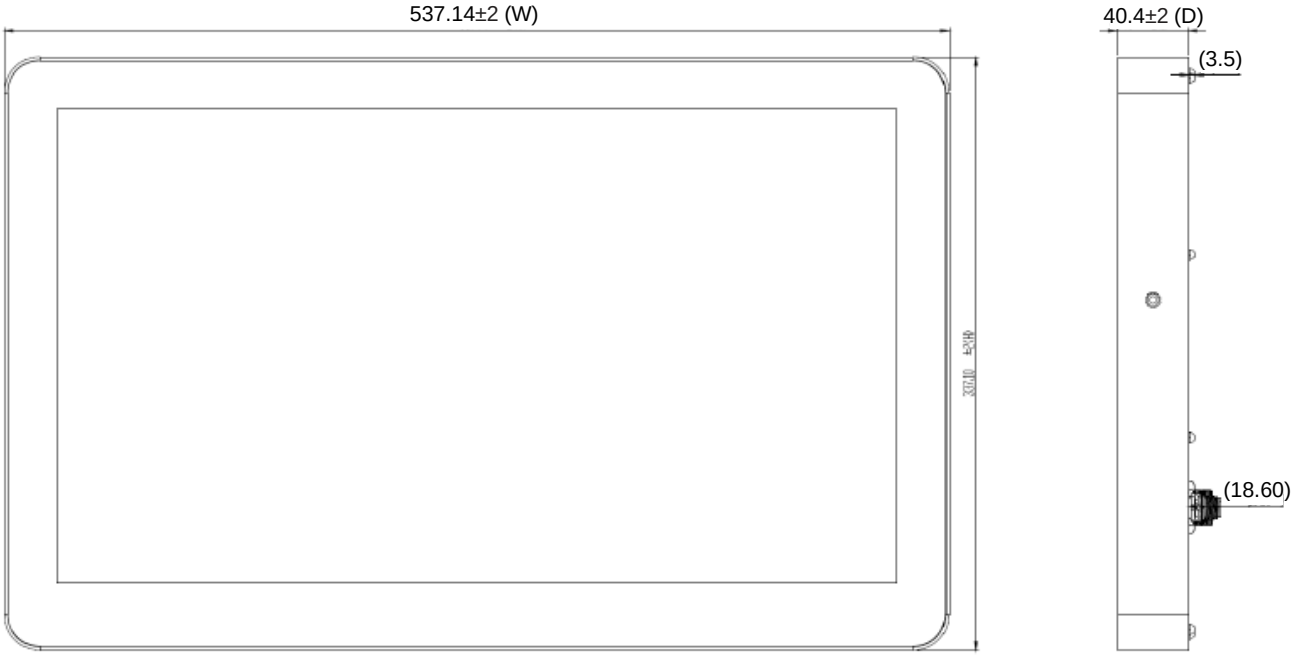


### Rear View

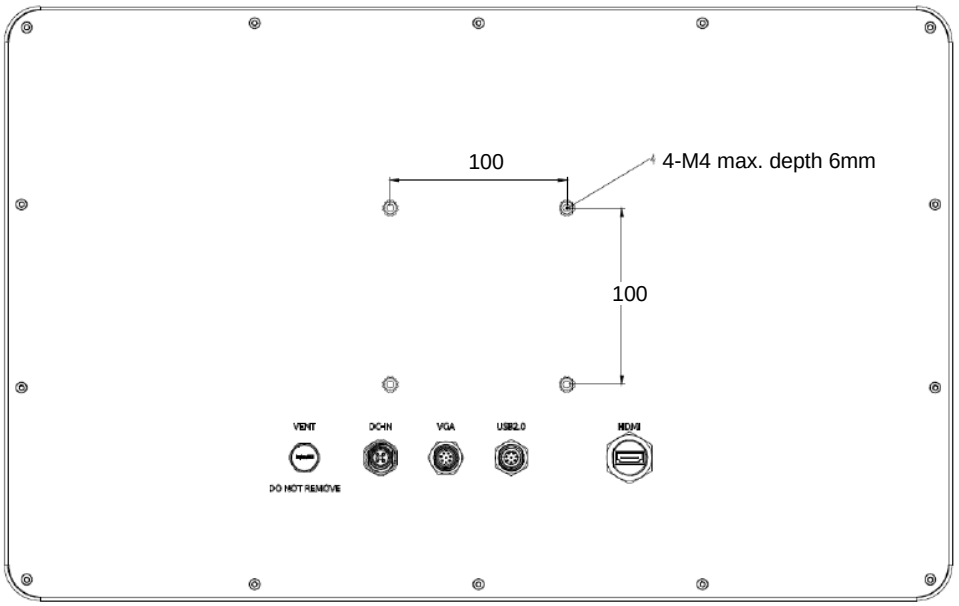


All products and company names listed are trademarks or trade names of their respective companies. Updated October 2026. ©2026 ADLINK Technology, Inc. All Rights Reserved. All pricing and specifications are subject to change without further notice.